

**十-LORN 豪恩**  
Electret Condenser Microphone Units

**深圳市豪恩电声科技有限公司**

Shenzhen Horn Electroacoustic Technology Co., Ltd

SPEC.SHEET NO: N031206007



Address:  
Block 9, Shuiwei Ind Zone, Shuiwei New  
Village, Dalang, Longhua, Shenzhen,  
Guangdong, China 518109

Tel: (86)755-28121370/ 28121371/28109416/28109419  
Fax: (86)755-28109417  
E-mail: rd@horn.com.cn  
Website: www.horn.com.cn

**CUSTOMER : Digi-Key Corporation**

## APPROVAL SHEET

PRODUCT NAME	PART NUMBER	DIMENSION	REMARK
Electret Condenser Microphone	<b>EM6015-44BC10&amp;33</b>	$\phi 6.0 \times 1.5(\text{mm})$	D.S.PCB

APPROVED BY	CHECKED BY	ISSUED BY
		

APPROVED BY

DATE:

Address:  
Block 9, Shuiwei Ind Zone, Shuiwei New  
Village, Dalang, Longhua, Shenzhen,  
Guangdong, China 518109


Tel: (86)755-28121370/ 28121371/28109416/28109419  
Fax: (86)755-28109417  
E-mail: rd@horn.com.cn  
Website: www.horn.com.cn

## SPECIFICATION

Item	Symbol	Test conditions	Min	Standard	Max	Unit
Sensitivity	S	f=1KHz. P <sub>in</sub> =1Pa	-46	-44	-42	dB 0dB=1V/Pa
Directivity	Omnidirectional					
Impedance	Z <sub>out</sub>				2.2	K Ω
Input sound Pressure level	S.P.L				100	dB
Operation voltage	V <sub>s</sub>	-	1.0	2	10	V
Current consumption	I	f=1KHz. P <sub>in</sub> =1Pa			500	uA
Sensitivity reduction	ΔS	f=1KHz. P <sub>in</sub> =1Pa V <sub>s</sub> =2→1.5V			-3	dB
S/N ratio	S/N(A)	f=1KHz. P <sub>in</sub> =1Pa A=curve	60			dB

**Measurement Circuit** ( Test Condition V<sub>s</sub>=2V RL=2.2K Ω

T<sub>a</sub>=20°C R.H=65% )

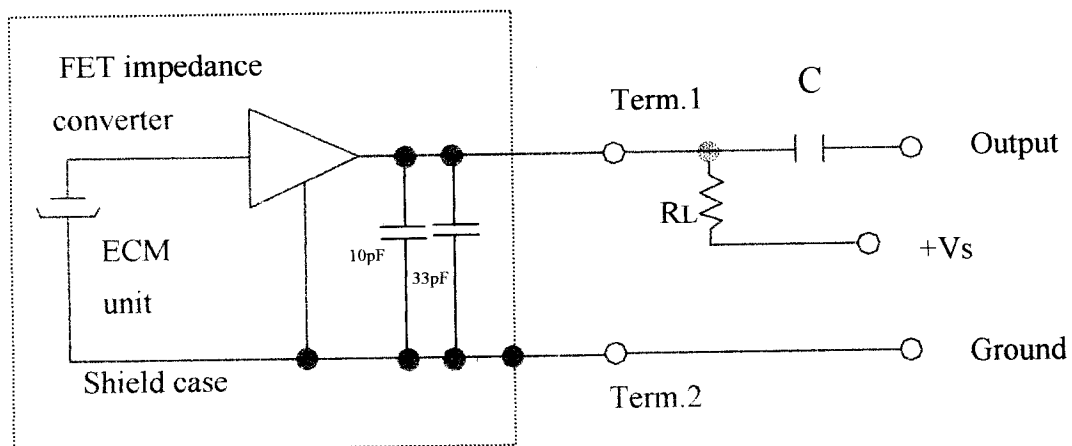


Address:  
Block 9, Shuiwei Ind Zone, Shuiwei New  
Village, Dalang, Longhua, Shenzhen,  
Guangdong, China 518109

Tel: (86)755-28121370/ 28121371/28109416/28109419  
Fax: (86)755-28109417  
E-mail: rd@horn.com.cn  
Website: www.horn.com.cn


## Dimensional Drawing

unit: mm

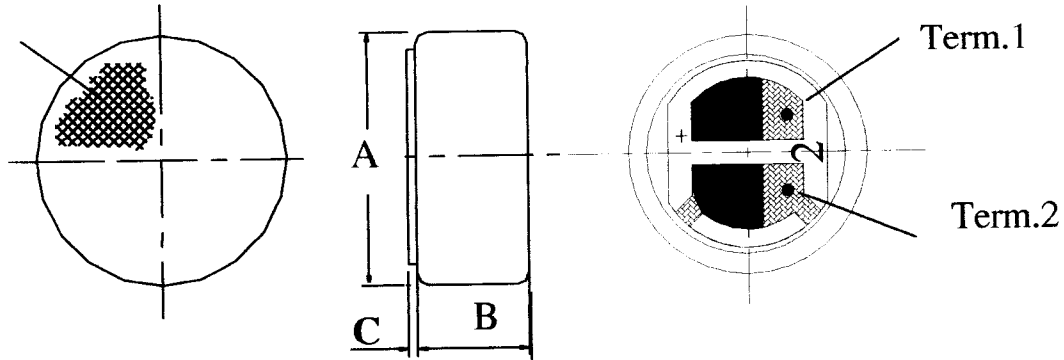

PART	MIN	STANDARD	MAX	REMARK
A	φ 5.9	φ 6.0	φ 6.1	
B	1.4	1.5	1.6	
C	0.1	0.2	0.3	

## Typical Frequency Response Curve

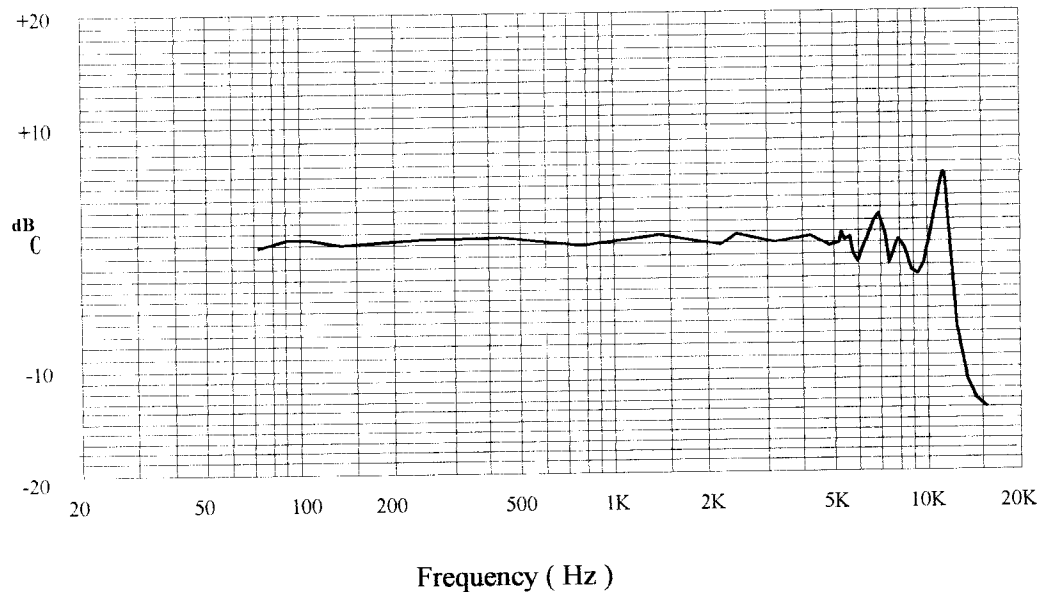

Address:  
Block 9, Shuiwei Ind Zone, Shuiwei New  
Village, Dalang, Longhua, Shenzhen,  
Guangdong, China 518109

Tel: (86)755-28121370/ 28121371/28109416/28109419  
Fax: (86)755-28109417  
E-mail: rd@horn.com.cn  
Website: www.horn.com.cn

## Ambient condition

### (1) Operating condition

Ambient temperature:  $-10^{\circ}\text{C} \sim +45^{\circ}\text{C}$   
Relative humidity:  $\leq 85\%$

### (2) Storage condition

Ambient temperature:  $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$   
Relative humidity:  $45\% \sim 75\%$

## Reliability Test

### 1) Vibration Test

To be no interference in operation after vibration of full amplitude 2mm for 30 minutes at three axis, the sensitivity to be within  $\pm 3\text{dB}$  from initial sensitivity.

### 2) Drop Test

To be no interference in operation after dropped to concrete floor each time from 1 meter height of three directions in state of packing, the sensitivity to be within  $\pm 3\text{dB}$  from initial sensitivity.

### 3) High Temperature Test

To be no interference in operation after high temperature test  $70 \pm 3^{\circ}\text{C}$  for 48 hours, the sensitivity to be within  $\pm 3\text{dB}$  from initial sensitivity.

### 4) Isotherm & Iso-humidity Test

To be no interference in operation after storage test at temperature  $60 \pm 2^{\circ}\text{C}$  and relative humidity  $(93 \pm 3\%)$  for 48 hours, the sensitivity to be within  $\pm 3\text{dB}$  from initial sensitivity. the test is performed at temperature  $20^{\circ}\text{C}$  after operation for 6 hours.

### 5) Low Temperature Test

To be no interference in operation after high temperature test  $-20 \pm 3^{\circ}\text{C}$  for 48 hours, the sensitivity to be within  $\pm 3\text{dB}$  from initial sensitivity.


### 6) Temperature Cycle Test

After exposure at  $+55 \pm 2^{\circ}\text{C}$  for 1 hour, at  $20 \pm 2^{\circ}\text{C}$  for 1 hour, at  $-10 \pm 2^{\circ}\text{C}$  for 1 hour, at  $20 \pm 2^{\circ}\text{C}$  for 1 hour, with 5 cycles. Change of sensitivity within  $\pm 3\text{dB}$  from initial measuring should be done after 2 hours exposed to  $20 \pm 2^{\circ}\text{C}$ .

### 7) Collision Test

After collided with the acceleration  $100 \pm 10\text{m/s}$ , at the vertical & horizontal directions for  $1000 \pm 10$  times, at the state of packing. Change of sensitivity within  $\pm 3\text{dB}$  from initial.

**TEST RESULT OF SAMPLES**

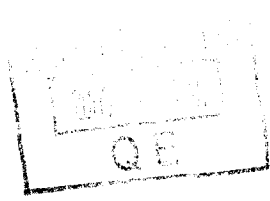NO.	1KHz (dB)	CURRENT (mA)	NOTES
1	-43.7	0.1	(1KHz、0dB=1V/Pa)  
2	-44.4	0.1	
3	-43.7	0.1	
4	-44.3	0.12	
5	-44.4	0.11	
6	-44.2	0.12	
7	-44.1	0.11	
8	-44.5	0.11	
9	-44	0.1	
10	-44.3	0.1	
11	-44	0.13	
12	-44.3	0.11	
13	-43.5	0.11	
14	-44.1	0.1	
15	-43.7	0.14	

Customer: Digi-Key Corporation

Date: 2003.12.09


Part number: EM6015-44BC10&33

Sensitivity: -44±2dB

Test condition: 2.2K Ω 2V

Tester: G1

SHENZHEN HORN ELECTROACOUSTIC TECHNOLOGY CO., LTD.  
X:1.0000kHz \*Y:-44.53dB\* ZA:Live Curve SSR Fund.

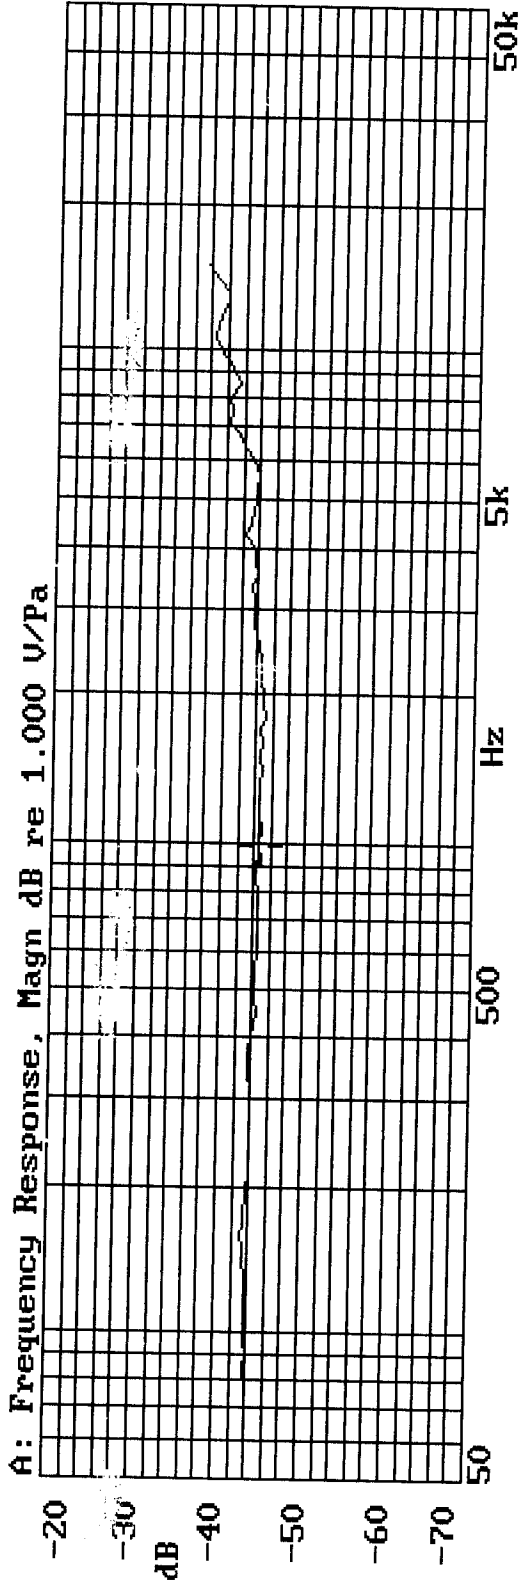

MODEL: EM6015-44BC10&33  
CODE: 5#  
SENSITIVITY: -44.53dB (1KHz)  
TEST CONDITION: 2.2K $\Omega$  2V

09-DEC-2003 09:41:33

Mode: SSR



## Certificate of Confirmed Products

Date: Dec. 07. 2003

NO: W031206007

SUPPLIER	HORN	BUYER	<b>Digi-Key Corporation</b>	
TITLE	ECM	MODEL	<b>EM6015-44BC10&amp;33</b>	
SIZE	$\phi 6.0 \times 1.5\text{mm}$	TEST CONDITION	2.2K $\Omega$ 2V	
QUANTITY		SAMPLE: 15PCS		
<b>SPECIFICATIONS</b>				
Sensitivity		-44 $\pm$ 2dB (0dB=1V/Pa. 1KHz )		
Directivity		Omnidirectional		
Impedance		Low impedance		
Standard operation voltage		2V		
Operation voltage		1.0-10V		
Current consumption		Max 500uA		
Maximum input S.P.L		100dB		
S/N ratio		More than 60 dB		
Sensitive reduction		within-3dB at 1.5V		
The test result from customers		Signature: _____ . _____ . 2003		
Final confirmed	Pass	Refuse	Accepted basis on	
Remarks				

\*\*\*\*\* The form must be confirmed by return fax after your test as your best regards! \*\*\*\*\*