

MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
EX-AR182

EX-AR182

DRAWING
NUMBER

8

ISSUE

REVISIONS

A	CO	58360	9 NOV 85
B	CO	61381	27 AUG 10
C	DAW	22 APR 87	
D	CO	70715 B	
E	TSM	10 OCT 91	
F	CO	73019	
G	MAM	19 SEP 92	
H	CO	81637	
I	GLH	3 APR 98	
J	0012750		
K	KR	26 APR 05	
L	0068804		
M	MBN	27 AUG 10	

27 AUG 10

CEL 7 OCT 85

CHECK

7 OCT 85

CHECK

7 OCT 85

CHECK

7 OCT 85

CHECK

7 OCT 85

CHECK

7 OCT 85

CHECK

7 OCT 85

CHECK

7 OCT 85

CHECK


7 OCT 85

CHECK

7 OCT 85


CHECK

MTG HOLE AND SLOT FOR .250 DIA SCREW
HOLE FOR NO. 10 PAN HEAD SCREW (6)
5.250 ± .030

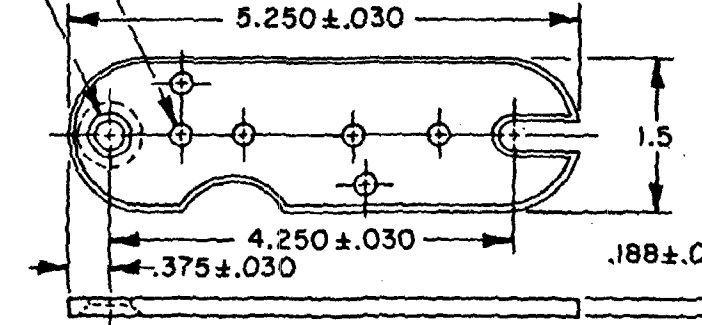


MOUNTING BRACKET (1) AND 10-32 UNF X .250 REF
PAN HEAD SCREW (2) FURNISHED UNASSEMBLED
SCALE - HALF SIZE

ROLLER LEVER
ADJUSTABLE
THRU 360°

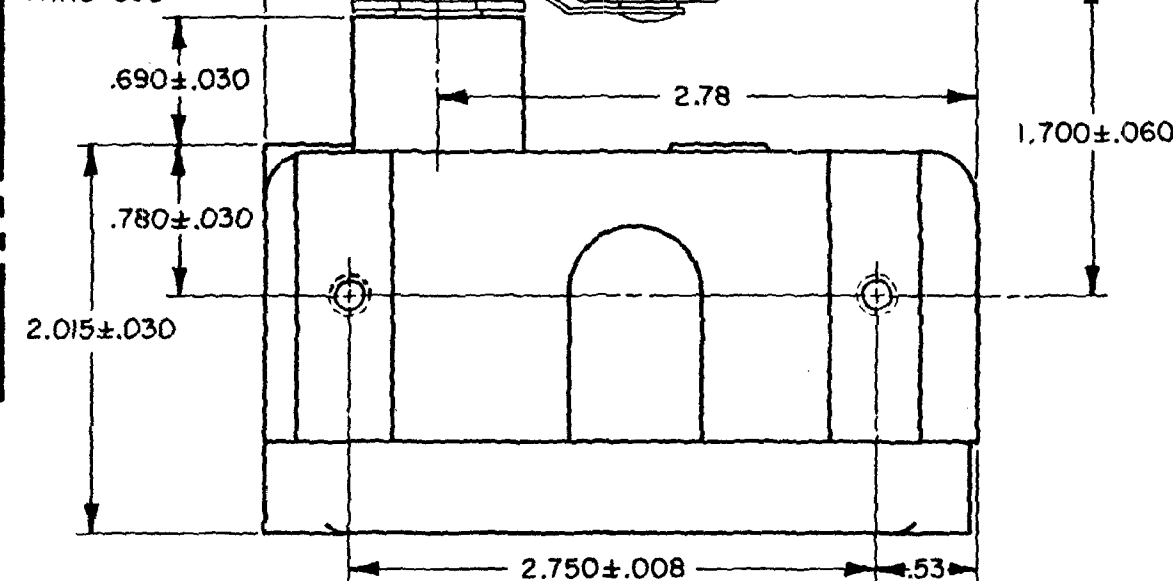

ROLLER LEVER MAY BE POSITIVELY
LOCKED AT INTERVALS OF APPROX
0.2° (1980 POSITIONS)

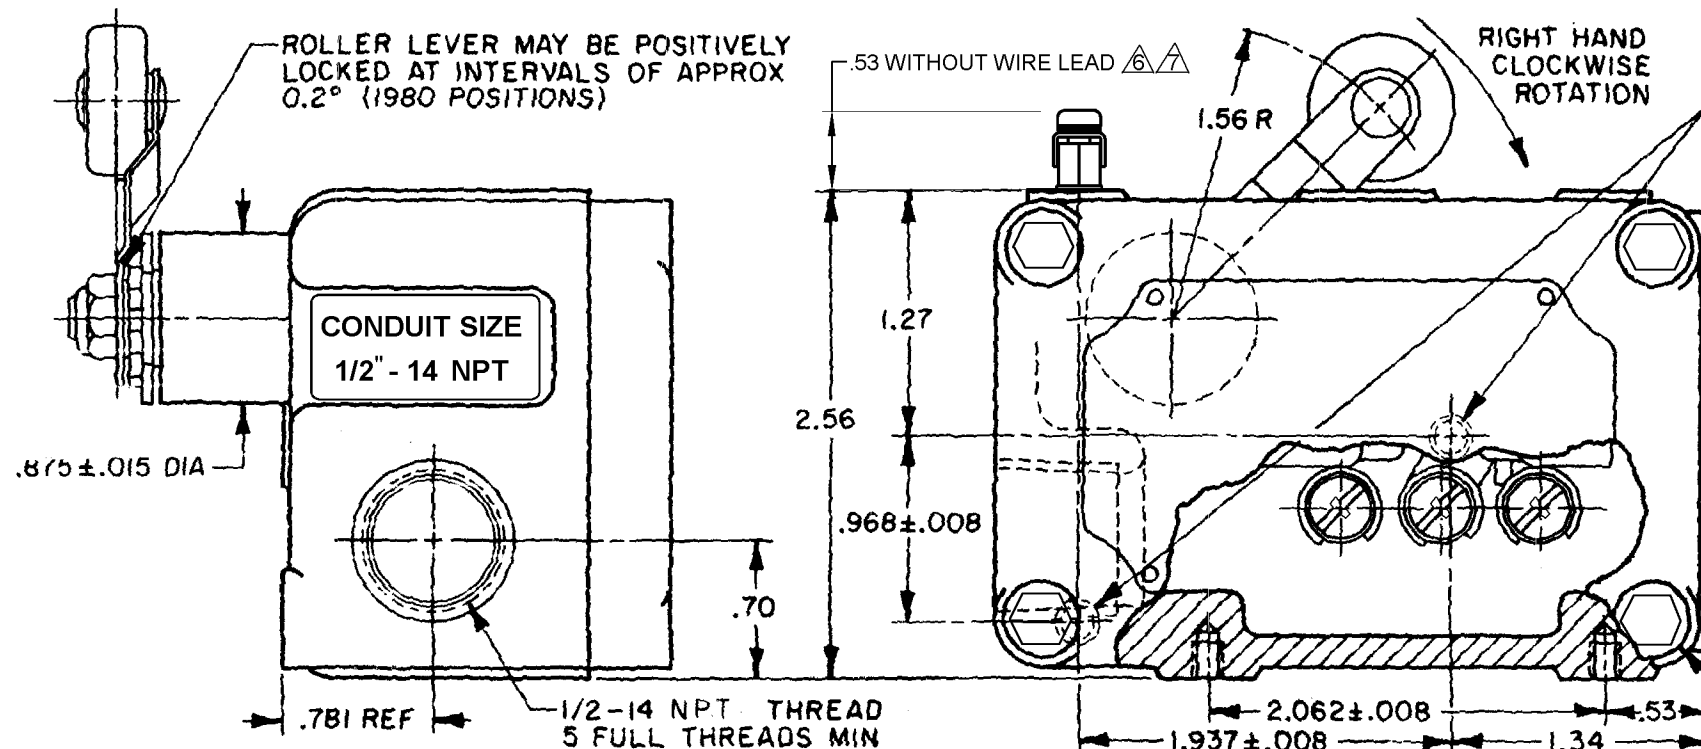

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF
HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	1/2 - 1 1/4 LB
RELEASE FORCE	1/4 LB MIN
PRETRAVEL	.219 MAX 8°
DIFFERENTIAL TRAVEL	.007 MAX 1/4°
DO NOT OVERTRAVEL MORE THAN	-90°
SWITCH-BASIC REPLACEMENT	BZ-2R-P4

ELECTRICAL DATA

CONTACT ARRANGEMENT	S P D T
CODE L96	15A-125, 250 OR 480 VAC
	1/8HP-125 VAC; 1/4HP-250 VAC
	1/2A-125 VDC; 1/4A-250 VDC



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±					
	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in	
NO PLACES	N	1/64			
ONE PLACE	N,N	0.01018	N,N	0.01018	
TWO PLACES	N,N,N	0.00159	N,N,N	0.00159	
THREE PLACES					
ANGLES					