

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PREPARED BY MICRO SWITCH

FED. MFR. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
EX-AR87

EX-AR87

M

DRAWING
NUMBER

2

13

ISSUE

2

3

CHECK

REVISIONS

P 0068804

MBN

27 AUG 10

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

REPLACES

RELEASE NO. PR - 6803

27 AUG 10

CMH

CHECK

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

RASTER

FO-80376.003

DRAWN

17 JULY 62

CHECK

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62



29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

29 JULY 62

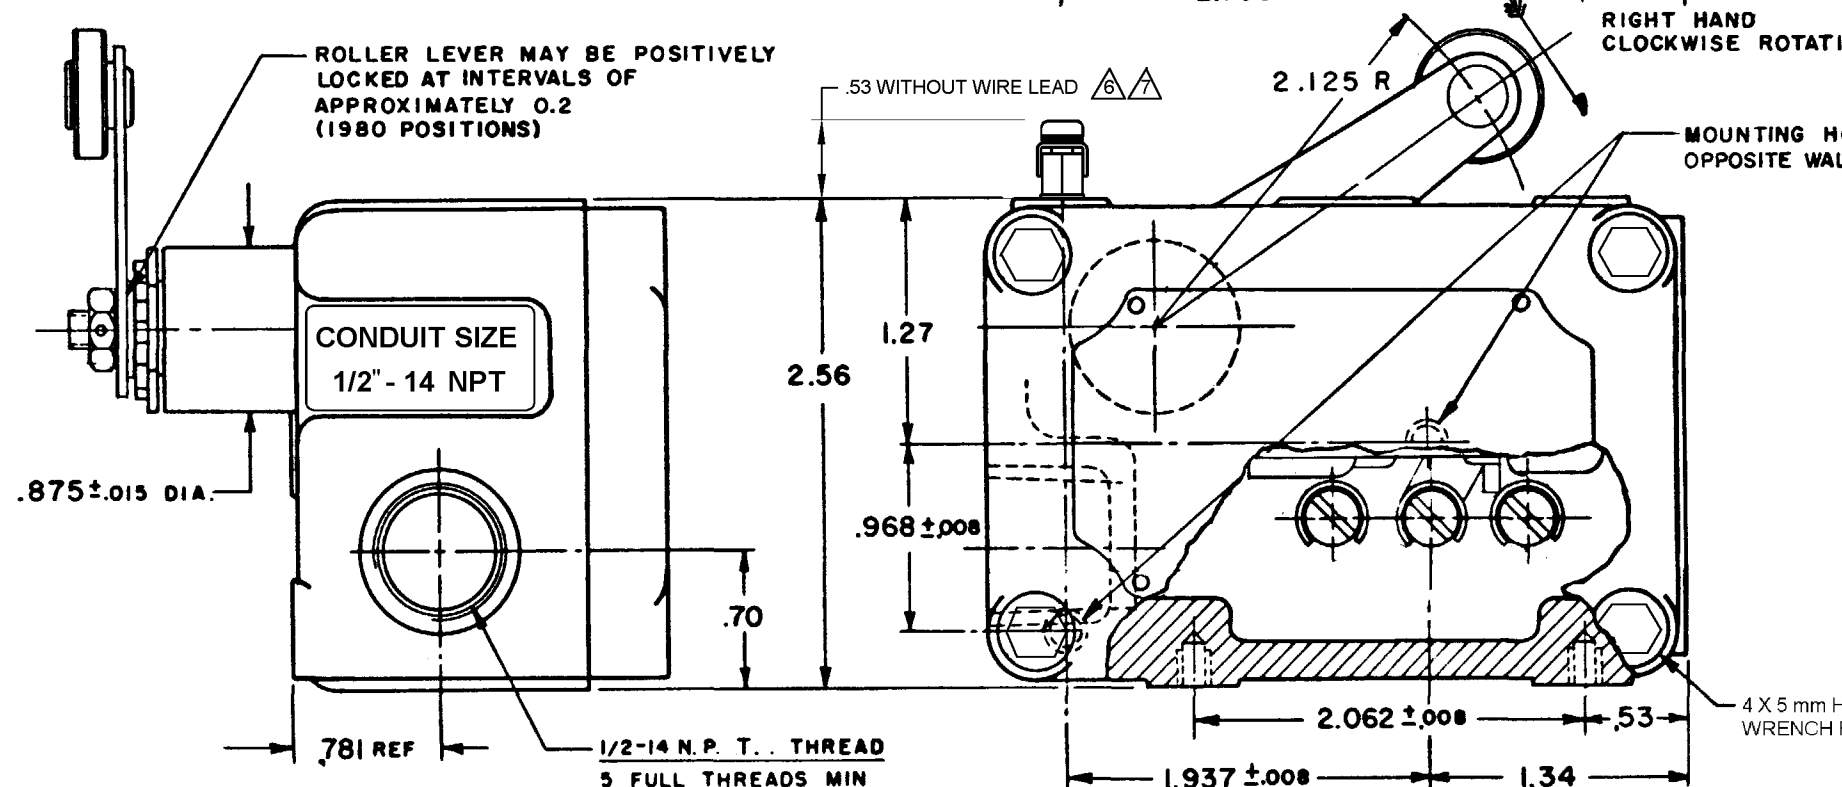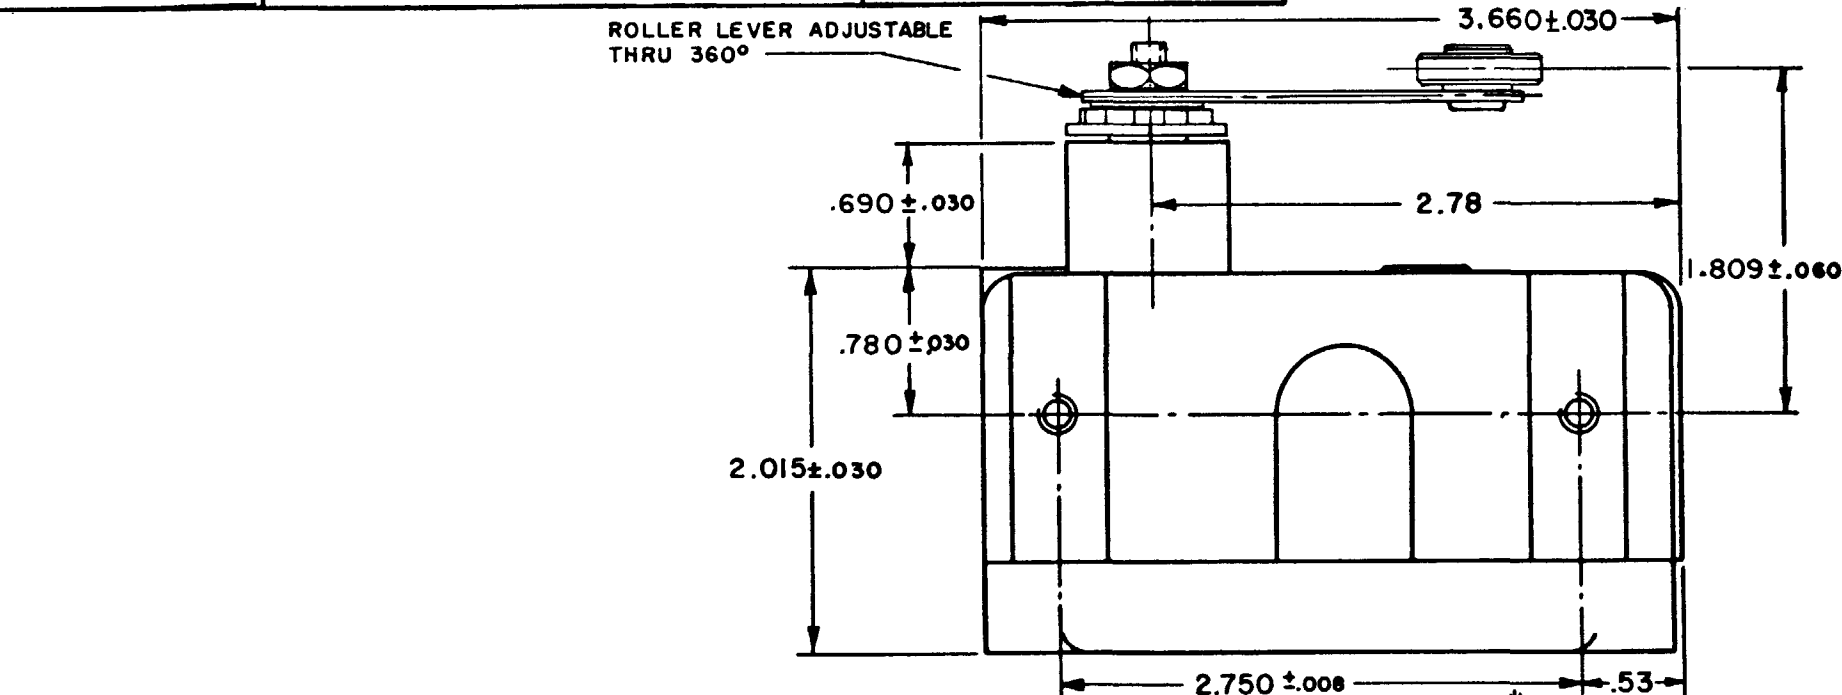

⑧ .625 REF DIA X .156 REF WIDE MOLYBDENUM DISULFIDE FILLED NYLON ROLLER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA		SCALE FULL
OPERATING FORCE — — — — 16 OZ MAX	CONTACT ARRANGEMENT S P D T	BREAK DISTANCE .020 MIN	DO NOT SCALE PRINT
RELEASE FORCE — — — — 3 OZ MIN	-L96- 15 A-125, 250, OR 480 VAC 1/2 A-125 VDC; 1/4 A-250 VDC 1/8 HP-125 VAC; 1/4 HP-250 VAC		UNLESS OTHERWISE SPECIFIED
PRETRAVEL — — — — .300 MAX			DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL — — — — .010 MAX			TOLERANCES ARE:
DO NOT OVERTRAVEL MORE THAN — — 90°			ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .008 ANGLES ±
SWITCH-BASIC REPLACEMENT- BZ-2R-P4			WEIGHT



NOTE-

- 1 - MOUNTING SCREW HOLE, 10-32 NF-28 THREADS X .219 REF DEEP (8)
- 2 - 8-32 NC X .219 REF TERMINAL SCREWS AND CUPWASHERS
- 3 - EXPLOSION PROOF-UNDERWRITER'S LAB INC LISTING FOR HAZARDOUS LOCATIONS NEMA 7, CLASS I, GROUPS C AND D, NEMA 9, CLASS II GROUPS E, F AND G
- 4 - EUROPEAN HAZARDOUS LOCATIONS DESIGNATION: Ex d IIB + H2 T6 CATAGORY II 2 G
- 5 - SEAL RATING: NEMA 1

- △ EXTERNAL GROUND SCREW MAY BE ASSEMBLED TO ANY UNUSED MOUNTING SCREW HOLE
- △ ASSEMBLE PROVIDED SPLIT LOCKWASHER BETWEEN GROUND LUG AND HOUSING