

MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
EXD-Q26-2

EXD-Q26-2

DRAWING
NUMBER

ISSUE

10

REPLACES

RELEASE NO. PR - 7478

CMH 18OCT10

CHECK

AK 27 APR 05

CHECK

CMH 27 OCT 78

CHECK

CEB 27 OCT 78




CHECK

SLB 2 OCT 78

FO-52851-A


REVISIONS

A	CO	53779A
S	L	B
29	AUG	83
B	CO	58360
9	NOV	85
C	CO	60495
J	AS	NOV 86
D	CO	61381
D	AW	23 APR 87
E	CO	63239
T	LB	22 MAR 88
F	CO	73019
M	AM	19 SEP 92
G	CO	012750
N	M	09MAY05
H	CO	017245
K	RB	28 NOV 05
J	CO	070470
S	JK	18OCT10

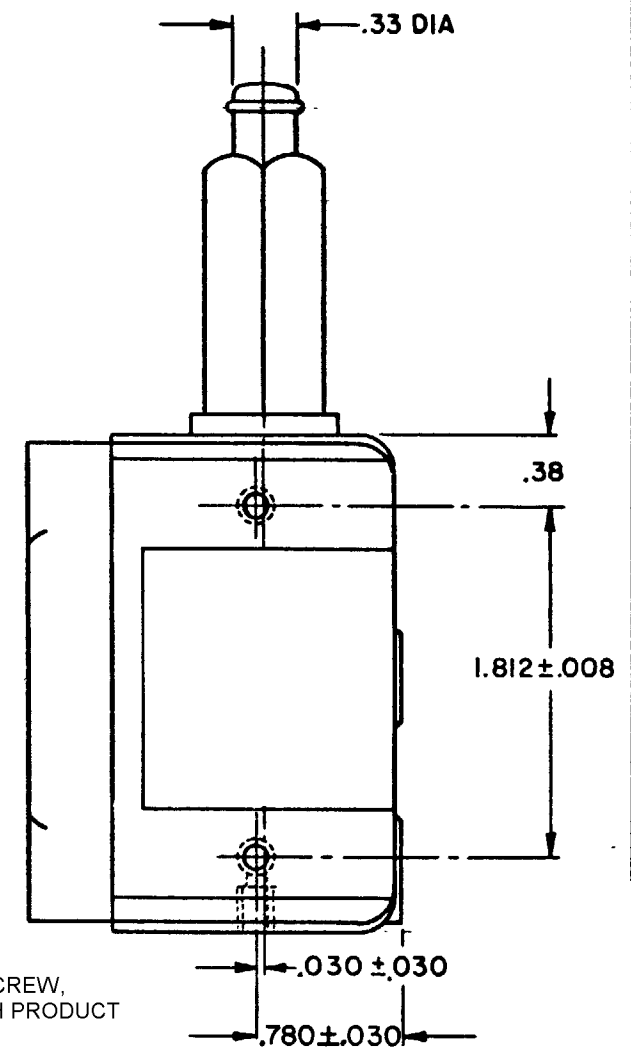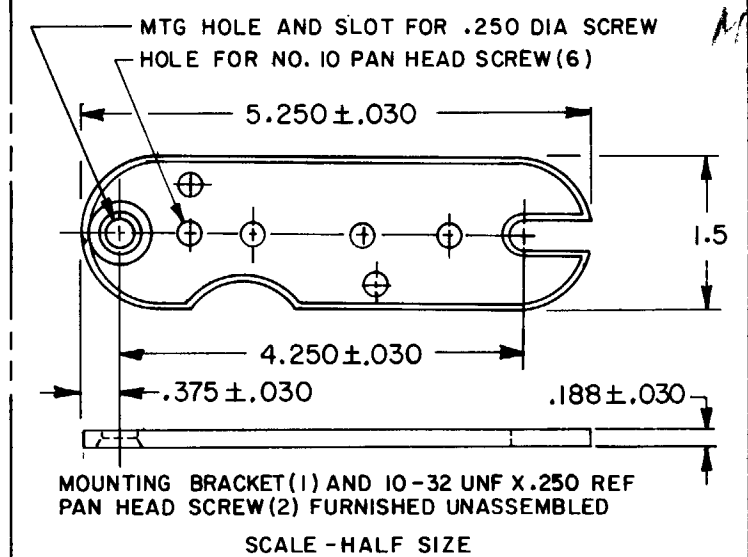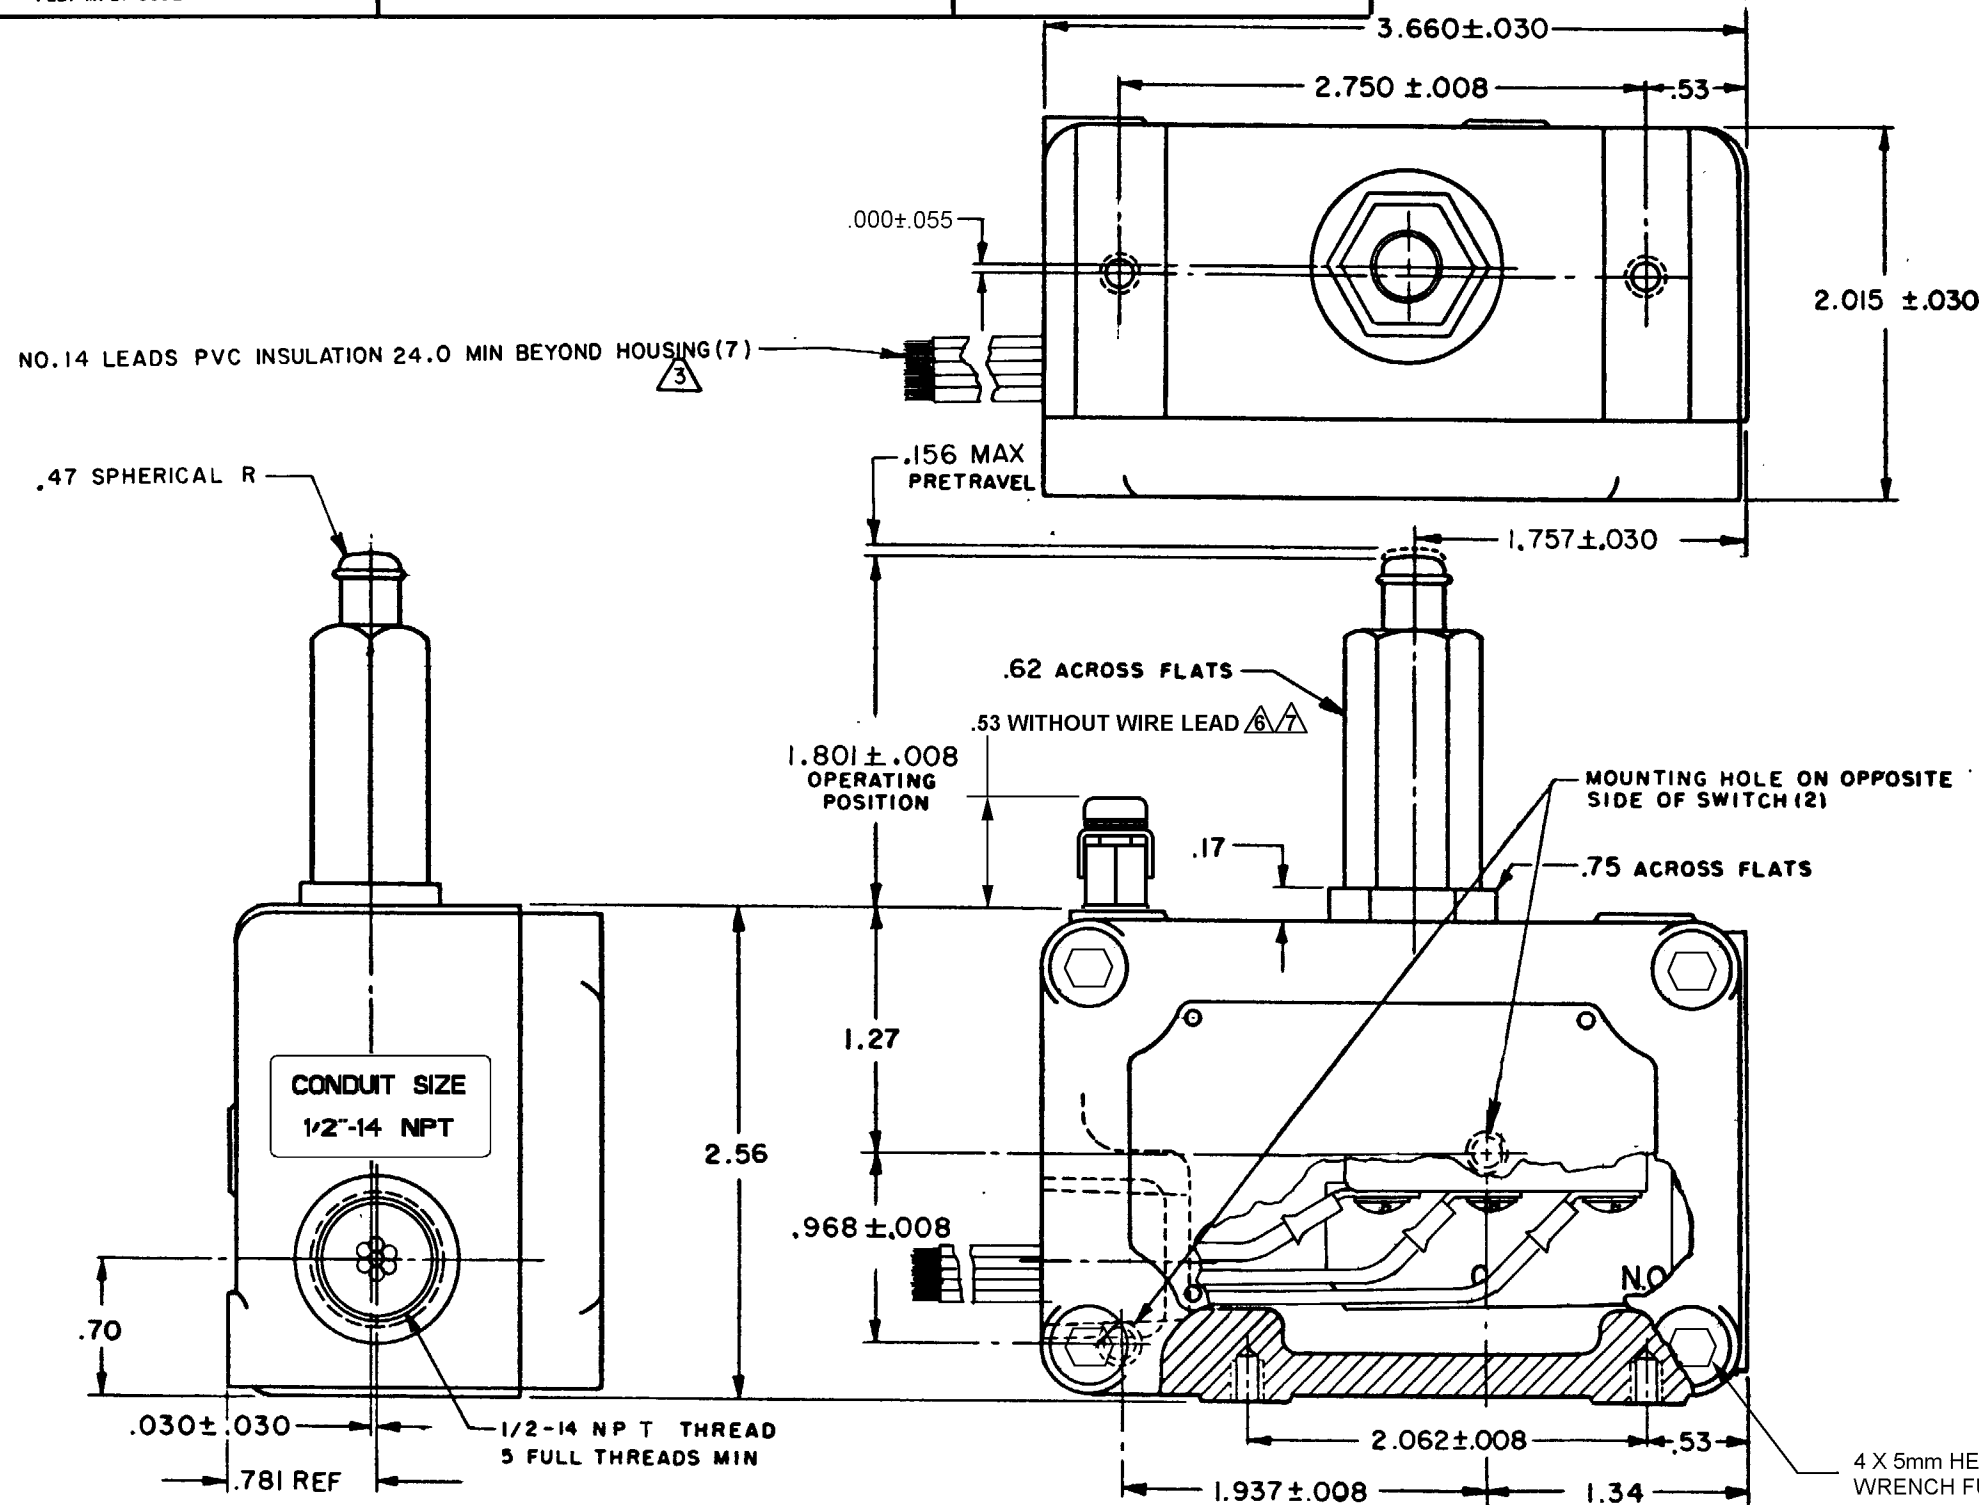

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED TOLERANCES ARE:

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/64	X
ONE PLACE	X, X	0.4/016	X, X
TWO PLACES	X, XX	0.8/016	X, XX
THREE PLACES	X, XXX	0.38/016	X, XXX
ANGLES		0.157/008	

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

RAW MATERIAL - COMMERCIAL STANDARD
MICRO SWITCH STANDARDS APPLY
DIMENSIONS ARE TO BE MET BEFORE
PROTECTIVE COATINGS ARE APPLIED

WEIGHT

NOTES

- 1 - (8) MOUNTING SCREW HOLE, 10-32 UNF-28 THREAD X .219 REF DEEP
- 2 - EXPLOSION PROOF - UNDERWRITERS' LAB. INC. LISTED FOR HAZARDOUS LOCATIONS NEMA 7, CLASS I, GROUPS B, C AND D, NEMA 9, CLASS II, GROUPS E, F AND G.
- 3 - COM LEADS - BLACK, N.C. LEADS - RED, N.O. LEADS - BLUE, GROUND LEAD - GREEN
- 4 - EUROPEAN HAZARDOUS LOCATIONS DESIGNATION: Ex dIIB + H2 T6 CATAGORY II 2 G
- 5 - SEAL RATING : NEMA 1
- 6 - EXTERNAL GROUND SCREW MAY BE ASSEMBLED TO ANY UNUSED MOUNTING SCREW HOLE
- 7 - ASSEMBLE PROVIDED SPLIT LOCKWASHER BETWEEN GROUND LUG AND HOUSING

CHARACTERISTICS
OPERATING FORCE - - - - - 3 LBS MAX
RELEASE FORCE - - - - - 1/2 LB MIN
DIFFERENTIAL TRAVEL - - - - .060 MAX
OVERTRAVEL - - - - - .141 MIN
BASIC SWITCH REPLACEMENT - - - - DT-2R-A7

ELECTRICAL DATA
CONTACT ARRANGEMENT D P D T
10A-125 OR 250 VAC 0.3A-125 VDC; 0.15A-250 VDC CODE L59



RASTER