


CXW SERIES

UPGRADE

105°C Long Life(5000 hours),Ultra Miniaturized

◆FEATURES

- Load Life : 105°C 5000 hours.(Temperature Range:-40°C~+105°C)
- Body diameter of φ10mm to φ18mm with high ripple current capability.
- This series is smaller and longer life than the current KXW series.
- RoHS compliance.

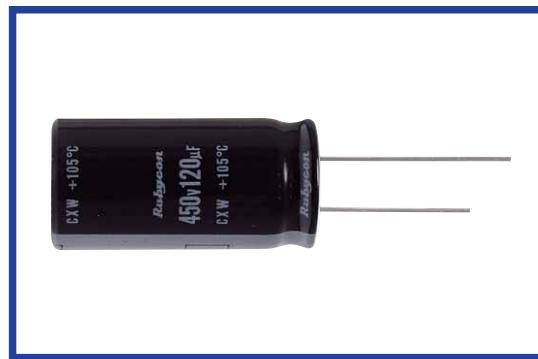

◆SPECIFICATIONS

Items	Characteristics									
Category Temperature Range	-40~+105°C									
Rated Voltage Range	400~450V.DC									
Capacitance Tolerance	±20%(20°C,120Hz)									
Leakage Current(MAX)	$I=3\sqrt{CV}$ (After 5 minutes application of rated voltage) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(V)									
Dissipation Factor(MAX) (tanδ)	<table border="1"> <tr> <td>Rated Voltage (V)</td> <td>400~450</td> <td>(20°C,120Hz)</td> </tr> <tr> <td>tanδ</td> <td>0.2</td> <td></td> </tr> </table>		Rated Voltage (V)	400~450	(20°C,120Hz)	tanδ	0.2			
Rated Voltage (V)	400~450	(20°C,120Hz)								
tanδ	0.2									
Endurance	After applying rated voltage with rated ripple current for 5000 hours at 105°C, the capacitors shall meet the following requirements. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table>		Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.		
Capacitance Change	Within ±20% of the initial value.									
Dissipation Factor	Not more than 200% of the specified value.									
Leakage Current	Not more than the specified value.									
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated Voltage (V)</td> <td>400</td> <td>420,450</td> <td>(120Hz)</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>5</td> <td>6</td> <td></td> </tr> </table>		Rated Voltage (V)	400	420,450	(120Hz)	Z(-25°C)/Z(20°C)	5	6	
Rated Voltage (V)	400	420,450	(120Hz)							
Z(-25°C)/Z(20°C)	5	6								

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency(Hz)	60(50)	120	500	1k	10k≤	
Coefficient	400~450WV	0.8	1.00	1.25	1.40	1.50

◆OPTION


	Code
PET Sleeve	EFR

◆PART NUMBER

□□□ CXW — □□□ M — □□□ Option — □□ Lead Forming — D XL Case Size
 Rated Voltage Series Capacitance Capacitance Tolerance Option Lead Forming Case Size

◆DIMENSIONS

(mm)

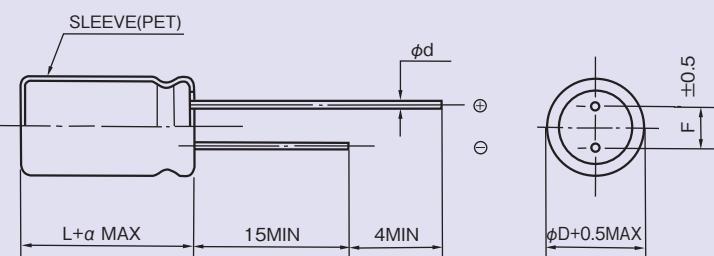

ϕD	10	12.5	14.5	16	18
ϕd	0.6		0.8		
F	5.0		7.5		
a	2.0				

◆STANDARD SIZE

Rated Voltage (V.DC)	Capacitance (μF)	Size $\phi D \times L$ (mm)	Rated Ripple Current (A r.m.s.105°C,120Hz)
400	39	10×40	0.37
	47	10×45	0.42
	56	10×50	0.47
	68	12.5×40	0.54
	82	12.5×45	0.61
	82	14.5×31.5	0.57
	100	12.5×50	0.68
	100	14.5×40	0.69
	100	16×31.5	0.71
	120	14.5×45	0.79
	120	16×35	0.80
	150	16×40	0.92
	150	18×31.5	0.89
	150	18×40	1.05
	180	16×50	1.08
	180	18×40	1.06
	220	18×45	1.20
420	39	10×40	0.36
	47	10×50	0.43
	56	12.5×40	0.48
	68	12.5×40	0.52
	68	14.5×31.5	0.52
	82	12.5×45	0.59
	82	14.5×35	0.59
	100	14.5×40	0.67
	100	16×31.5	0.69
	120	14.5×45	0.75
	120	16×35	0.78
	120	18×31.5	0.80
	150	16×45	0.94
	150	18×35	0.92
	180	16×50	1.05
	180	18×40	1.04
	220	18×50	1.22

Rated Voltage (V.DC)	Capacitance (μF)	Size $\phi D \times L$ (mm)	Rated Ripple Current (A r.m.s.105°C,120Hz)
450	33	10×40	0.34
	39	10×45	0.38
	47	12.5×40	0.44
	56	12.5×40	0.49
	68	12.5×45	0.55
	68	14.5×31.5	0.52
	82	12.5×50	0.62
	82	14.5×40	0.63
	82	16×31.5	0.64
	100	14.5×45	0.71
	100	16×35	0.73
	120	14.5×50	0.79
	120	16×40	0.82
	120	18×31.5	0.80
	150	16×50	0.98
	150	18×40	0.97
	180	18×45	1.09
	220	18×50	1.22