

JZV SERIES

105°C Low Impedance, High Temperature Reflow Soldering.

◆FEATURES

- Load Life : 105°C 2000 hours.
- High Temperature reflow soldering is available.
- Available for high density mounting.
- Prescribe Impedance value at 100 kHz.
- RoHS compliance.




◆SPECIFICATIONS

Items	Characteristics																								
Category Temperature Range	-55~+105°C																								
Rated Voltage Range	6.3~35V.DC																								
Capacitance Tolerance	±20% (20°C, 120Hz)																								
Leakage Current(MAX)	I=0.01CV or 3μA whichever is greater.(After 2 minutes application of rated voltage) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(V)																								
Dissipation Factor(MAX) (tanδ)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> </tr> </thead> <tbody> <tr> <td>(20°C, 120Hz)</td> <td>0.26</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> </tbody> </table>	Rated Voltage (V)	6.3	10	16	25	35	(20°C, 120Hz)	0.26	0.19	0.16	0.14	0.12												
Rated Voltage (V)	6.3	10	16	25	35																				
(20°C, 120Hz)	0.26	0.19	0.16	0.14	0.12																				
Endurance	<p>After applying rated voltage with rated ripple current for 2000 hours at 105°C, the capacitors shall meet the following requirements.</p> <table border="1"> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±30% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </tbody> </table>	Capacitance Change	Within ±30% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.																		
Capacitance Change	Within ±30% of the initial value.																								
Dissipation Factor	Not more than 200% of the specified value.																								
Leakage Current	Not more than the specified value.																								
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>Z(-55°C)/Z(20°C)</td> <td>4</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p>(120Hz)</p>	Rated Voltage (V)	6.3	10	16	25	35	Z(-25°C)/Z(20°C)	2	2	2	2	2	Z(-40°C)/Z(20°C)	3	3	3	3	3	Z(-55°C)/Z(20°C)	4	4	4	3	3
Rated Voltage (V)	6.3	10	16	25	35																				
Z(-25°C)/Z(20°C)	2	2	2	2	2																				
Z(-40°C)/Z(20°C)	3	3	3	3	3																				
Z(-55°C)/Z(20°C)	4	4	4	3	3																				

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)		120	1k	10k	100k≤
Coefficient	4.7μF	0.42	0.60	0.80	1.00
	10~33μF	0.45	0.75	0.90	1.00
	47~100μF	0.50	0.80	0.95	1.00
	220~1000μF	0.60	0.85	0.95	1.00


◆MARKING



※ Voltage Code


Rated Voltage (V)	6.3	10	16	25	35
Rated Voltage code	j	A	C	E	V

◆PART NUMBER



◆ **DIMENSIONS**

(mm)

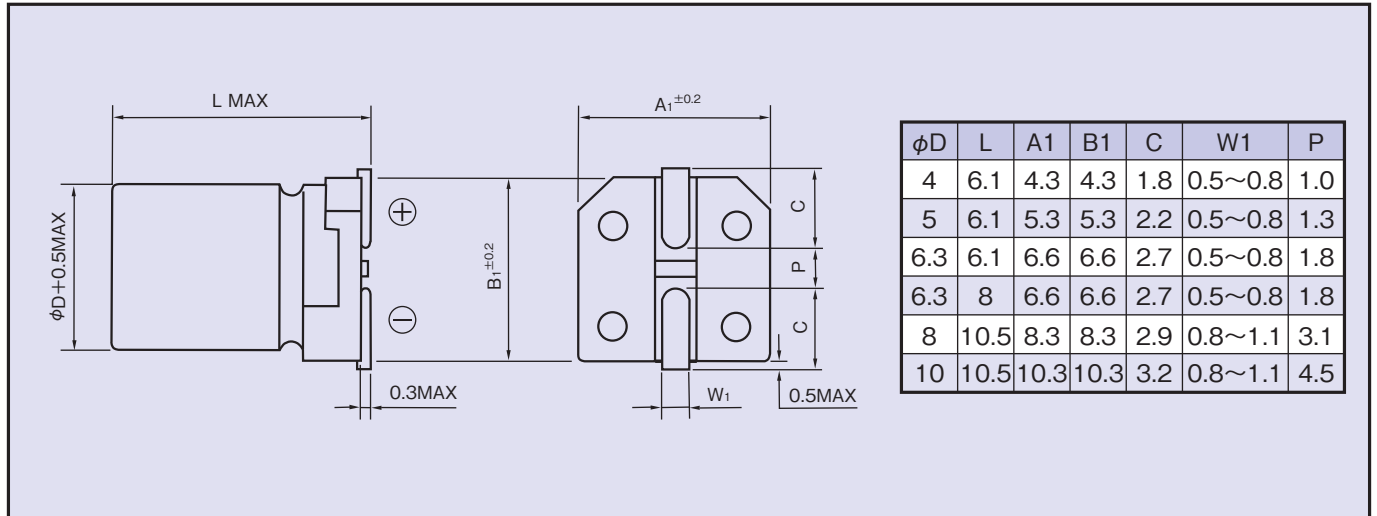

◆ **STANDARD SIZE** Size φD×L(mm), Ripple Current (mA r.m.s./105°C, 100kHz), Impedance(Ω MAX/20°C, 100kHz)

Cap(μF)	V.DC	6.3 (0J)			10 (1A)			16 (1C)		
		Size	Ripple	Impedance	Size	Ripple	Impedance	Size	Ripple	Impedance
10							4×6.1	90	1.35	
22		4×6.1	90	1.35			4×6.1	90	1.35	
							5×6.1	170	0.70	
33					4×6.1	90	1.35	5×6.1	170	0.70
47		4×6.1	90	1.35			5×6.1	170	0.70	
		5×6.1	170	0.70			6.3×6.1	250	0.36	
100		5×6.1	170	0.70			6.3×6.1	250	0.36	
		6.3×6.1	250	0.36			6.3×8	300	0.34	
220		6.3×6.1	250	0.36	6.3×8	300	0.34	6.3×8	300	0.34
		6.3×8	300	0.34						
330		6.3×8	300	0.34			8×10.5	600	0.16	
470					8×10.5	600	0.16	8×10.5	600	0.16
680					8×10.5	600	0.16	10×10.5	850	0.08
1000		8×10.5	600	0.16	10×10.5	850	0.08			

Cap(μF)	V.DC	25 (1E)			35 (1V)		
		Size	Ripple	Impedance	Size	Ripple	Impedance
4.7					4×6.1	90	1.45
10					4×6.1	90	1.45
					5×6.1	170	0.70
22					5×6.1	170	0.70
					6.3×6.1	250	0.36
33		5×6.1	170	0.70	6.3×6.1	250	0.36
		6.3×6.1	250	0.36			
47		6.3×6.1	250	0.36	6.3×6.1	250	0.36
					6.3×8	300	0.34
100		6.3×8	300	0.34	6.3×8	300	0.34
					8×10.5	600	0.16
220		8×10.5	600	0.16	8×10.5	600	0.16
330		8×10.5	600	0.16	10×10.5	850	0.09
470		10×10.5	850	0.09			