

(0,50 mm) .0197"

FJH SERIES

FJH-20-D-04.00-4

FJH-10-D-06.00-4

FLAT FLEXIBLE CABLE (FFC) JUMPER

SPECIFICATIONS

For complete specifications
see www.samtec.com/FJH

Conductor:

Tin Plated Copper

Conductor

Resistance:

1000 Ω /km max

Insulation Resistance:

10 M Ω /km min

(conductor-to-conductor)

Dielectric Test:

400 VAC during 1 minute

(conductor-to-conductor)

Temperature Rating:

-30°C to +80°C

Voltage Rating:

60 VAC

Flame Resistance:

VW-1 (UL 758)

Current Rating:

1.4A per contact

@ 50°C ambient

(4 contacts powered)

RoHS Compliant:

Yes



Mates with:
ZF5S

Double or
reversed ended

(0,50 mm)
.0197"
pitch

(4,00 mm)
.157"

FJH

NO. OF
POSITIONS

STYLE

OVERALL
LENGTHSTRIP
LENGTH

-10, -15, -20, -25,
-30, -40, -43, -50

-D
= Double End


-R
= Reversed
End

-“XX.XX”
= Specify
OVERALL LENGTH
in inches ($\pm 1/8$ inch)
(-D & -R = (50,80 mm) 2.00"
minimum)

-4
= (4,00 mm)
.157"

Note: Stiffener color will be
blue or black at Samtec's
discretion.

Note: Some sizes, styles and
options are non-standard,
non-returnable.

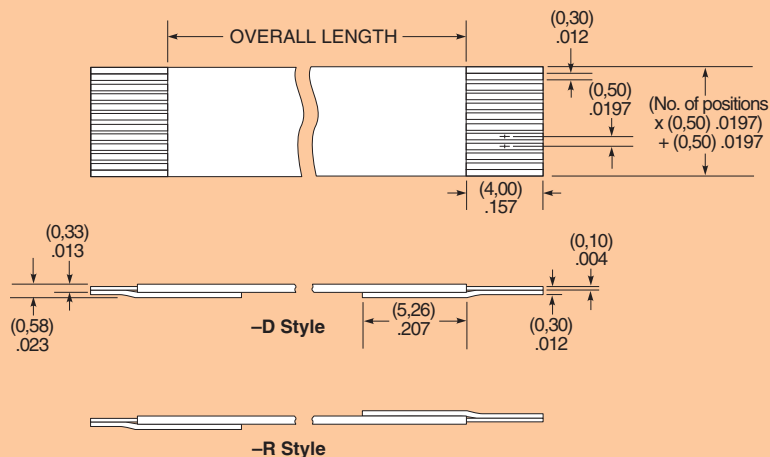

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683