




HFWS-06-02-T-S-RA

(5,08 mm) .200"

FWS, HFWS, SW SERIES

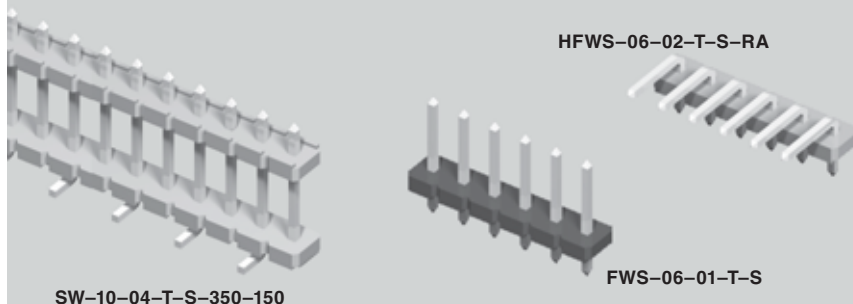

SW-10-04-T-S-350-150

FWS-06-01-T-S

POWER TERMINAL STRIP

Mates with:
PSS, HPF

SPECIFICATIONS

For complete specifications
see www.samtec.com?FWS
or www.samtec.com?HFWS

FWS/HFWS

Insulator Material:

Glass Filled

Polyester (FWS)

Liquid Crystal

Polymer (HFWS)

Terminal Material:

Phosphor Bronze

Plating:

Sn over 50µ" (1,27 µm) Ni

Operating Temp Range:

-55°C to +105°C

Voltage Rating:

500 VAC mated with PSS

RoHS Compliant:

Yes

Processing:

(HFWS-VS)

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0,20 mm) .008" max (02-15)

(0,25 mm) .010" max (16-20)

TYPE STRIP	NO. PINS	LEAD STYLE	PLATING OPTION	S	TAIL OPTION	OTHER OPTION
FWS = Standard Header			-T = Matte Tin			-VS-P = Surface Mount with Pick & Place Pad (3 Pos. min.) (6,98 mm) .275" min. post height
HFWS = High Temp Header						

Specify LEAD STYLE from chart below.

LEAD STYLE	A	B	C	D	E	F	G
-01	(4,57) .180	(11,94) .470	—	—	—	(10,72) .422	(8,64) .340
-02	(4,57) .180	(13,21) .520	(2,54) .100	(4,57) .180	(8,08) .318	(12,24) .482	(8,38) .330
-04	(4,09) .161	(21,06) .829	(4,95) .195	(3,96) .156	(13,82) .544	—	—
-05	(4,57) .180	(3,81) .150	—	—	—	—	—

01 thru 20

No. of Positions X (5,08) .200

CURRENT RATING (PER CONTACT)

AMBIENT TEMP	PSS/FWS
20°C	16.3A
40°C	15.0A
60°C	13.0A
95°C	8.7A

4 POSITIONS POWERED

Mates with:
PSS, HPF

SPECIFICATIONS

For complete specifications
see www.samtec.com?SW

Insulator Material:

Glass Filled

Polyester (SW-TH)

Liquid Crystal

Polymer (SW-VS)

Terminal Material:

Phosphor Bronze

Plating:

Sn over 50µ" (1,27 µm) Ni

Operating Temp Range:

-55°C to +105°C

RoHS Compliant:

Yes

Processing:

(SW-VS)

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0,20 mm) .008" max.

TYPE STRIP	NO. PINS	04	PLATING OPTION	S	STACK HEIGHT	POST HEIGHT	TAIL OPTION
SW = Standard Stacker			-T = Matte Tin		-“XXX” = Stacker Height (in inches) (0,13 mm) .005" increments Example: -250 = (6,35 mm) .250"		Leave blank for Through-Hole
						-“XXX” = Post Height (in inches)	-VS = Surface Mount (2 pins/row minimum)
							-VS-P = Surface Mount with Pick & Place Pad (3 Pos. min.) (6,98 mm) .275" max. post height

02 thru 20

Note: Some lengths, styles and options are non-standard, non-reusable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
 SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
 SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683