


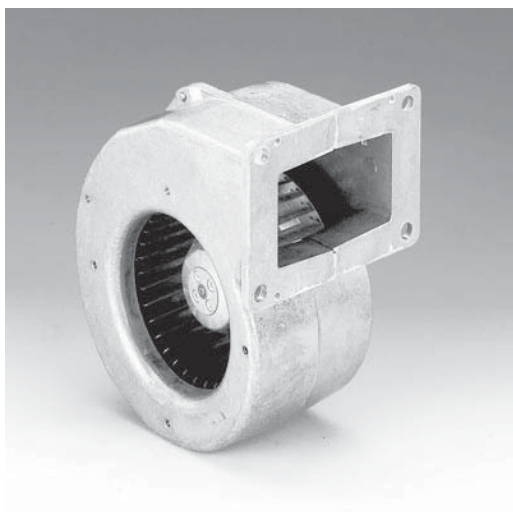


G2S097 Series Centrifugal Blower

Ø 97mm


- AC single inlet, forward curved centrifugal blower. Via a bracket, the integrated external-rotor motor is mounted on one side of the housing.
- Direction of rotation is CW as seen from suction side. Insulation class "B".
- Maintenance-free ball bearings.
- UL, CSA, VDE approvals on some models, please contact application engineering.
- Housing and impeller of galvanised sheet-steel. Forward curved impellers are directly press-fitted onto the rotor of the external-rotor motor.

Part Number	Curve	CFM @ 0	VAC	Hertz	Power (W)	dBA	Max Amb. Temp C	Bearing Type	Features	Capacitor (µF)	Wgt. (lbs)
G2S097-DB61-08	3	26	115	50/60	23	37	55	Ball	Leads	-	1.81
G2S097-DB03-01	3	26	230	50/60	23	37	55	Ball	Leads	-	1.81

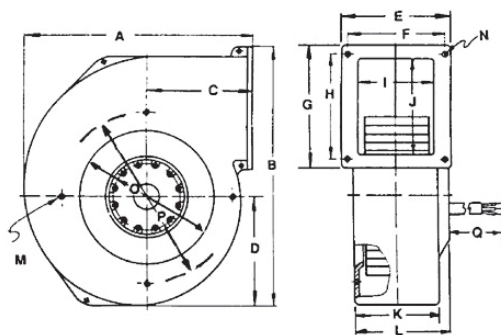

DIMENSIONS - inches (mm)

PART NUMBER	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
G2S097-DB61-08	5.63	5.39	2.95	2.44	-	-	-	-	1.57	1.81	1.57	1.57	N/A	N/A	3.15	3.78	11.81
G2S097-DB03-01	(143)	(137)	(75)	(62)	(-)	(-)	(-)	(-)	(40)	(46)	(40)	(40)	-	-	(80)	(96)	(300)

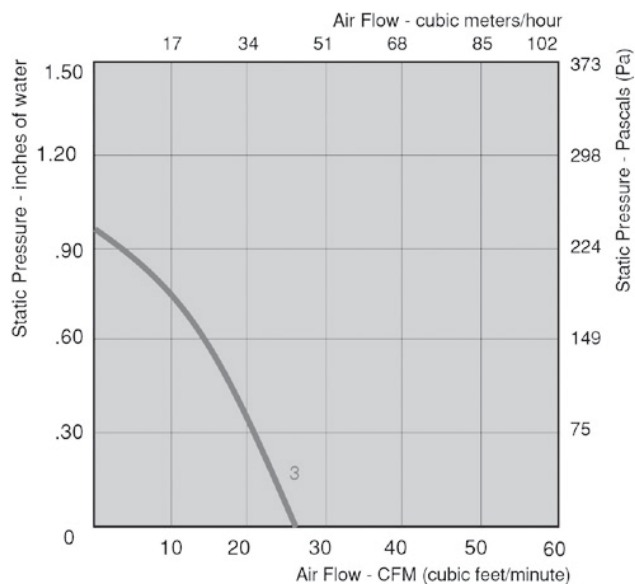

ebmpapst

e-mail: sales@us.ebmpapst.com - TEL: 860-674-1515 - FAX: 860-674-8536

ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm-papst Inc., 2004 © ebm-papst Inc. reserves the right to change any specifications or data without notice