


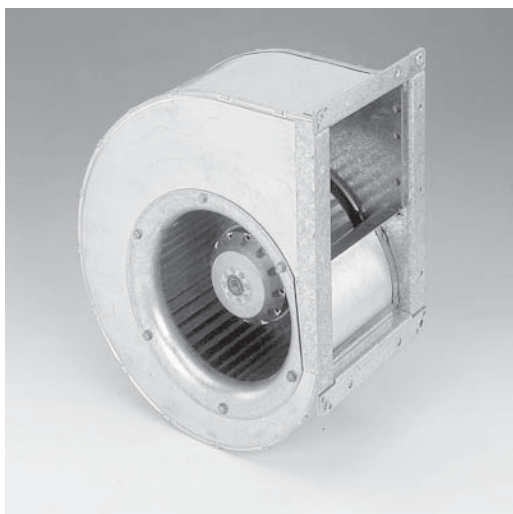


G4E180 Series Centrifugal Blower


Ø 180mm

- AC single inlet, forward curved centrifugal blower. Via a bracket, the integrated external-rotor motor is mounted on one side of the housing.
- Direction of rotation is CW as seen from suction side. Insulation class "B".
- Maintenance-free ball bearings.
- Housing of die-cast aluminium and impeller of galvanised sheet-steel. Forward curved impellers are directly press-fitted onto the rotor of the external-rotor motor.
- UL, CSA, VDE approvals on some models, please contact application engineering.

Part Number	Curve	CFM @ 0	VAC	Hertz	Power (W)	dBA	Max Amb. Temp C	Bearing Type	Features	Capacitor (µF)	Wgt. (lbs)
G4E180-AB09-15	2	350	115	60	146	65	45	Ball	Leads	10	7.50
G4E180-AB01-01	2	350	230	60	146	65	45	Ball	Leads	3	7.50

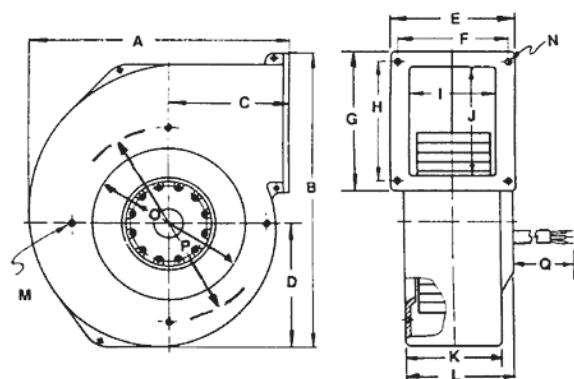

PART NUMBER	A	B	C	D	E	F	G	H	I
G4E180-AB09-15	10.24 (260)	11.54 (293)	4.72 (120)	4.80 (122)	4.92 (125)	4.33 (110)	5.51 (140)	4.72 (120)	3.39 (86)
G4E180-AB01-15									
	J	K	L	M	N	O	P	Q	
	4.33 (110)	3.62 (92)	4.13 (105)	M4	.275 (7)	5.91 (150)	7.64 (194)	17.72 (450)	

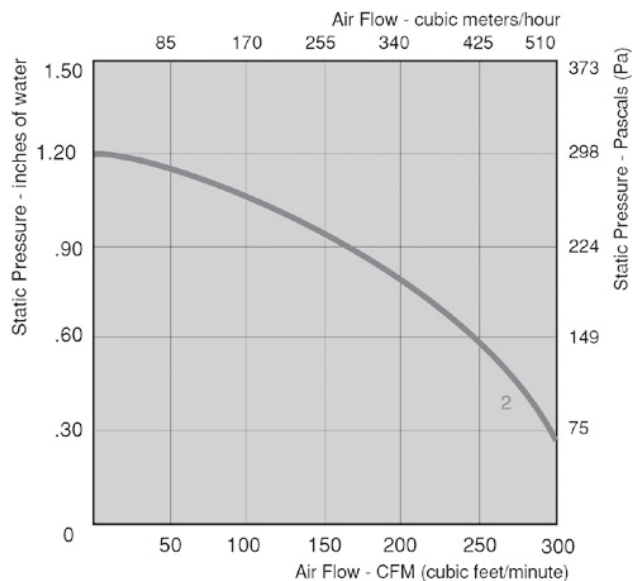

ebmpapst

e-mail: sales@us.ebmpapst.com - TEL: 860-674-1515 - FAX: 860-674-8536

ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm-papst Inc., 2004 © ebm-papst Inc. reserves the right to change any specifications or data without notice