

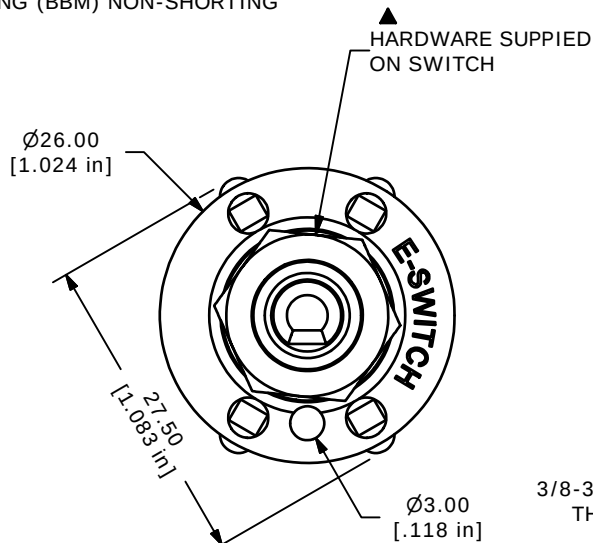
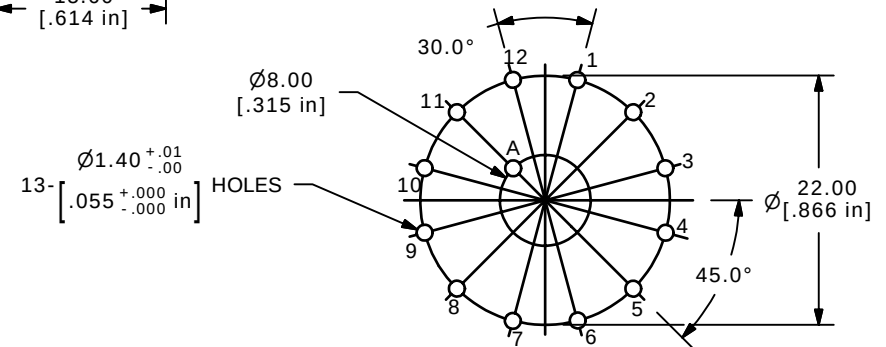
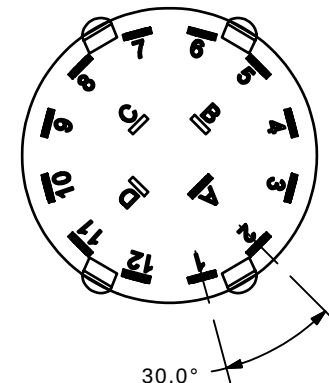


CONTACT CONFIGURATION
TIMING (BBM) NON-SHORTING

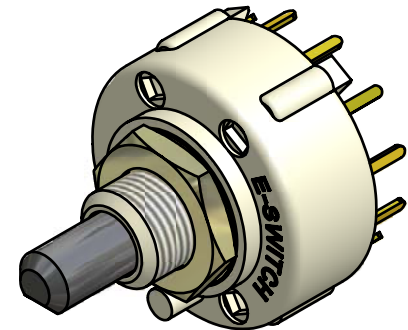

NOTE:

1. ALL DIMENSIONS IN MM[INCH].
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. CONTACT MATERIAL: GOLD
5. CONTACT RATING: 150MILLIAMPS, 250VAC/DC
350MILLIAMPS, 110VAC/DC
6. CONTACT RATING (NON-SWITCHING) 5A
7. OPERATING FORCE 425±100CM/STANDARD
8. OPERATING TEMP: -30°C TO 85°C
- ▲ 9. CIRCUIT SP: 12 POSITION 30° INDEX
10. DIELECTRIC STRENGTH: 1000V RMS MIN.@ SEA LEVEL.
- ▲ 11. HARDWARE SUPPLIED ON SWITCH:
LOCKWASHER, HEXNUT
12. ▲ DENOTES CRITICAL PARAMETER.

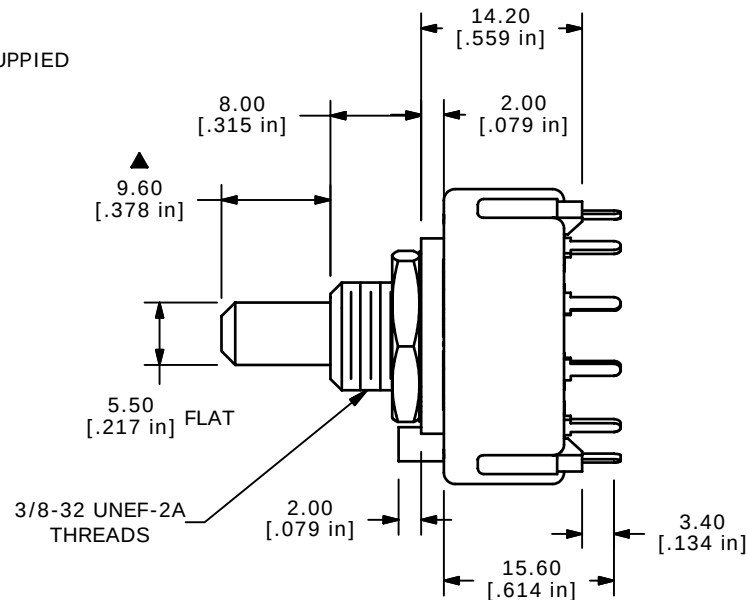

P.C.B MOUNTING PLATE

G	15290	ADDED PCB MOUNING PLATE	9/19/05	PH					
F	15276	REVISED NOTE 9	9/14/05	PH					
E	14496	REVISED & REDRAWN	11/12/04	AR	TITLE KC52A10.001NPF				
REV	PCR NO	DESCRIPTION	DATE	BY	SCALE 1.5:1	DATE 3/5/2001	DR CJB	DWG G510346	REV G
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									