

Customer Information Sheet

DRAWING No.: H3184-XX

SHEET 2 OF 2

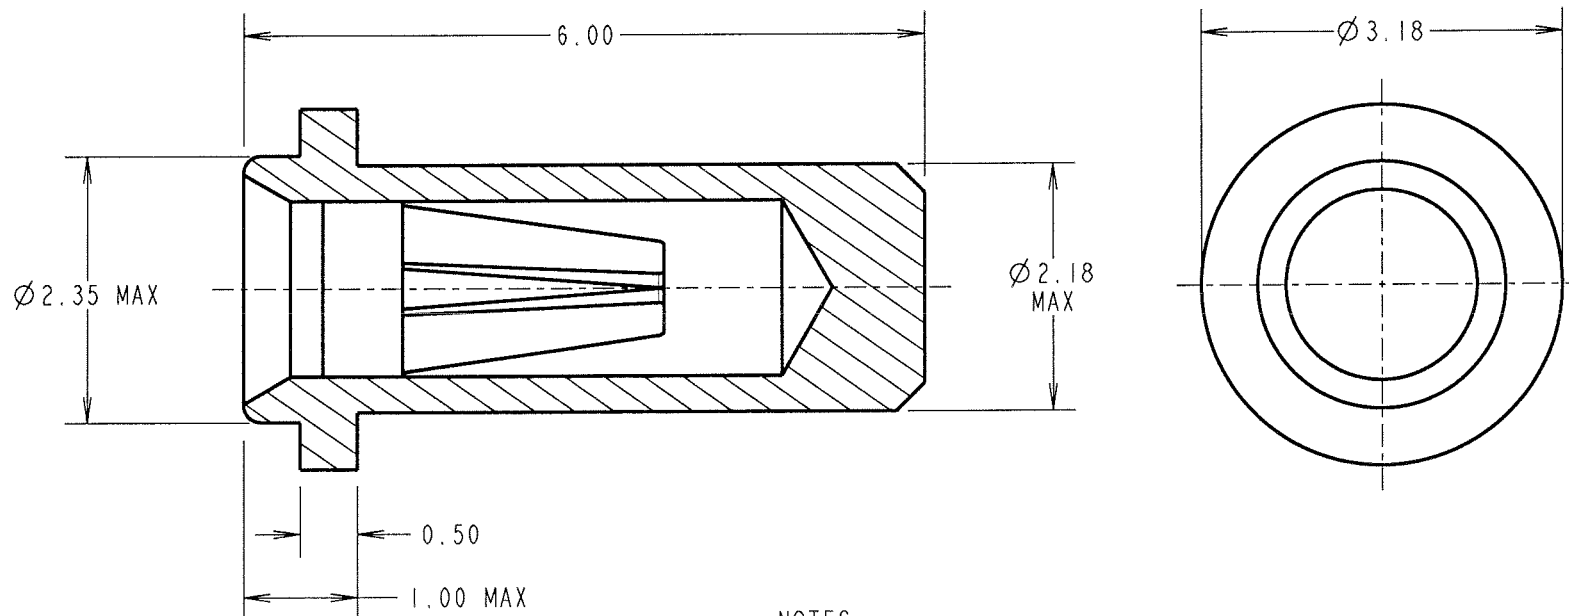
IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

**SPECIFICATION:****MATERIAL:**

CONTACT SHELL = BRASS

CONTACT CLIP = BERYLLIUM COPPER

FINISH:

01 = 4µ 100% SHELL, 0.15µ GOLD CLIP

05 = 0.1µ GOLD SHELL, 0.15µ GOLD CLIP

ELECTRICAL:

CURRENT RATING AT 25°C = 10A MAX

CURRENT RATING AT 85°C = 7.5A MAX

CONTACT RESISTANCE (INITIAL) = 10 MILLIOHMS MAX

CONTACT RESISTANCE (AFTER CONDITIONING) = 25 MILLIOHMS MAX

MECHANICAL:

INSERTION FORCE (INITIAL) = 9N MAX, 3N MIN (Ø1mm GAUGE)

WITHDRAWAL FORCE (INITIAL) = 3N MAX, 1N MIN (Ø1mm GAUGE)

DURABILITY = 1000 OPERATIONS

ENVIRONMENTAL:

OPERATING TEMPERATURE = -55°C TO +125°C

NOTES:

1. FOR ELECTRICAL/MECHANICAL SPECIFICATION, SEE COMPONENT SPECIFICATION C009XX (LATEST ISSUE).
2. MAXIMUM PIN LENGTH = 5.29mm.
3. RECOMMENDED MOUNTING HOLE SIZE = Ø2.24-2.19mm.
4. RECOMMENDED PIN SIZE = Ø1.05-0.90mm.
5. MAXIMUM CONTACT DEPTH = 3.90mm.

ORDER CODE:**H3184-XX****FINISH:**

01 = 100% TIN SHELL, GOLD CLIP

05 = GOLD SHELL, GOLD CLIP

JMB	6	13.11.06	9554
NAME	ISS.	DATE	C/NOTE
APPROVED:			
CHECKED:			
DRAWN:			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm

ANGLES = ±5°

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA:

mm²**TITLE:**

Ø1.00mm SOCKET ASSEMBLY

DRAWING NUMBER:

H3184-XXSHT
2
OF
2

HARWIN INC U.S.A.	HARWIN PLC U.K.	HARWIN PTE SINGAPORE
TEL: (812) 542 2540	TEL: 023 9231 4545	TEL: 65 6779 4909
FAX: (812) 542 2541	FAX: 023 9231 4590	FAX: 65 6779 3868