

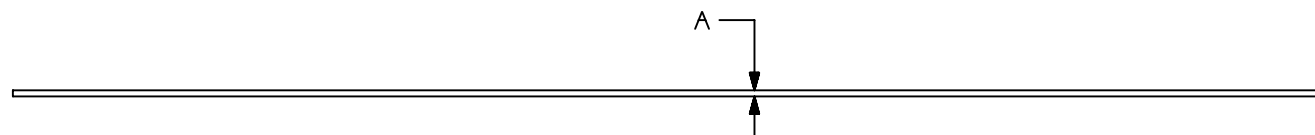


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

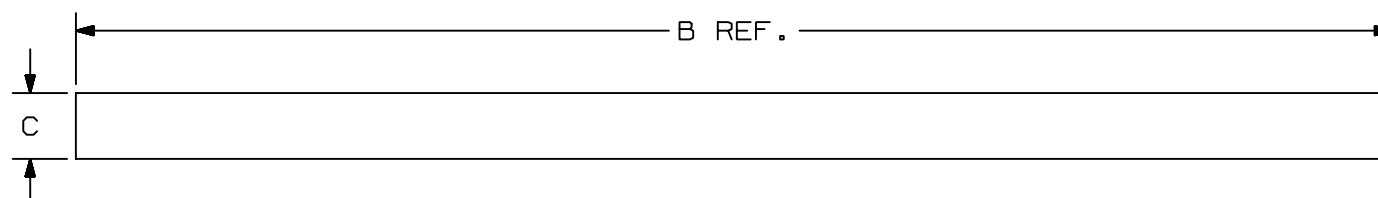

PANDUIT PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	MIN. LOOP ** TENSILE lbs. (N)
	MIN. in (mm)	MAX. in (mm)				
*HLM-15R	.25 (6.4)	VARIOUS	.100 (2.5)	180 (4572)	.330 (8.4)	18 (80)

Ⓑ

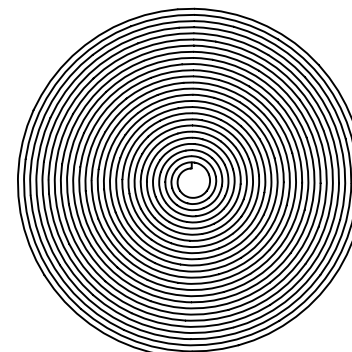

15 FT. ROLL

NOTES:

- * 1) PACKAGED IN 15 FT. ROLLS. (SEE ILLUSTRATION)
- ** 2) MINIMUM 2" OVERLAP REQUIRED TO ACHIEVE LOOP TENSILE RATING.
- 3) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR OPTIONAL COLORS.

DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS									
SS-27052-02.PRT									
PANDUIT CORP. TINLEY PARK, ILLINOIS									
Ⓐ TAK-TY™ CABLE TIE CONTINUOUS 15FT. ROLL HLM SERIES									
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .125 (.XXX) ± .030 (.XX) ± .125 ANGLES ±						UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.			
2	10-6-00	JABO	Ⓑ ADJUSTED NEWTONS FROM 457 TO 80	27052	2	DRAWN BY KET		MAT'L: POLYETHYLENE HOOK/ NYLON KNIT LOOP	
1	10/22/98	KT	HVP Ⓐ TAK-TY™ WAS VELCRO®	27052	1	DATE 08-20-96		SCALE NONE	
R	8-20-98	KT	HVP DRAWING RELEASED	27052	R	CHK'D HVP		DRAWING NO. SS-27052	
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	DWG SIZE A	