

4

3

2

1

D

D

C




C

B

B

A

A

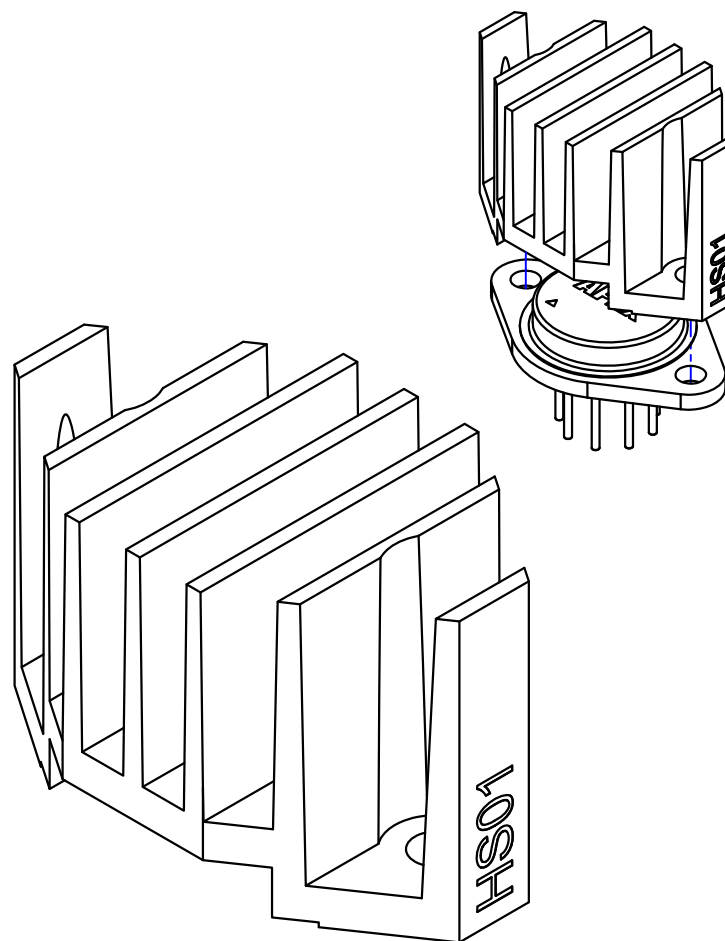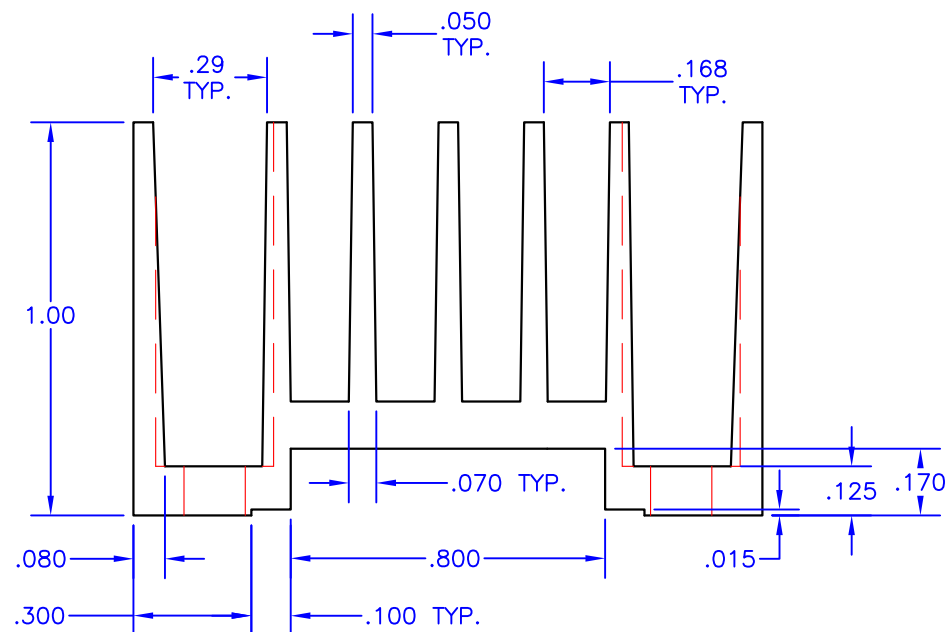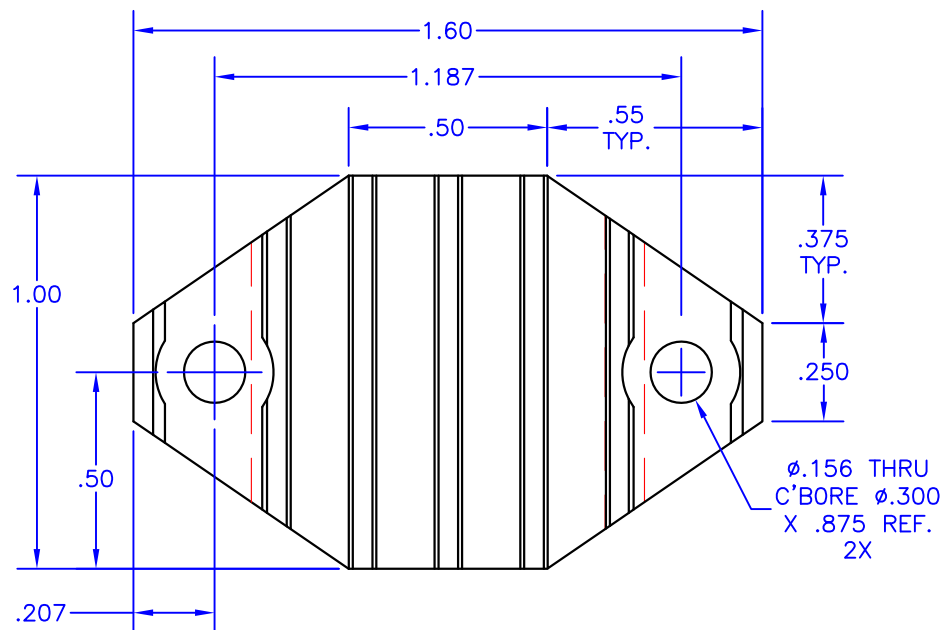

NOTES:

1. Unless otherwise noted, all dimensions are in inches.
2. Break all sharp edges, de-burr & remove loose chips.
3. Material: Aluminum (M/F Aavid Thermalloy NP971944)
4. Finish: Anodize per MIL-A-8625, Type II, Class 2, Black
Typical breakdown voltage > 300V
5. Mark with contrasting ink as shown, if specified by P.O.
6. Approximate Weight: 0.6 oz [17g]

TOLERANCES - UNLESS
OTHERWISE SPECIFIED

.XX = $\pm .05$ [.002]
.XXX = $\pm .005$ [.0002]
ANG. = $\pm 2^\circ$



TITLE:

HEATSINK, TO-3

SUBJECT:

MECHANICAL DRAWING

ENGINEER:

D-M

DRAWN BY:

P.ECK

DCL:

12434

SPL:

1

OF

1

MODEL:

HS01

FILENAME:

HS01

REV:

H

DATE:

14NOV12

4

3

2

1