
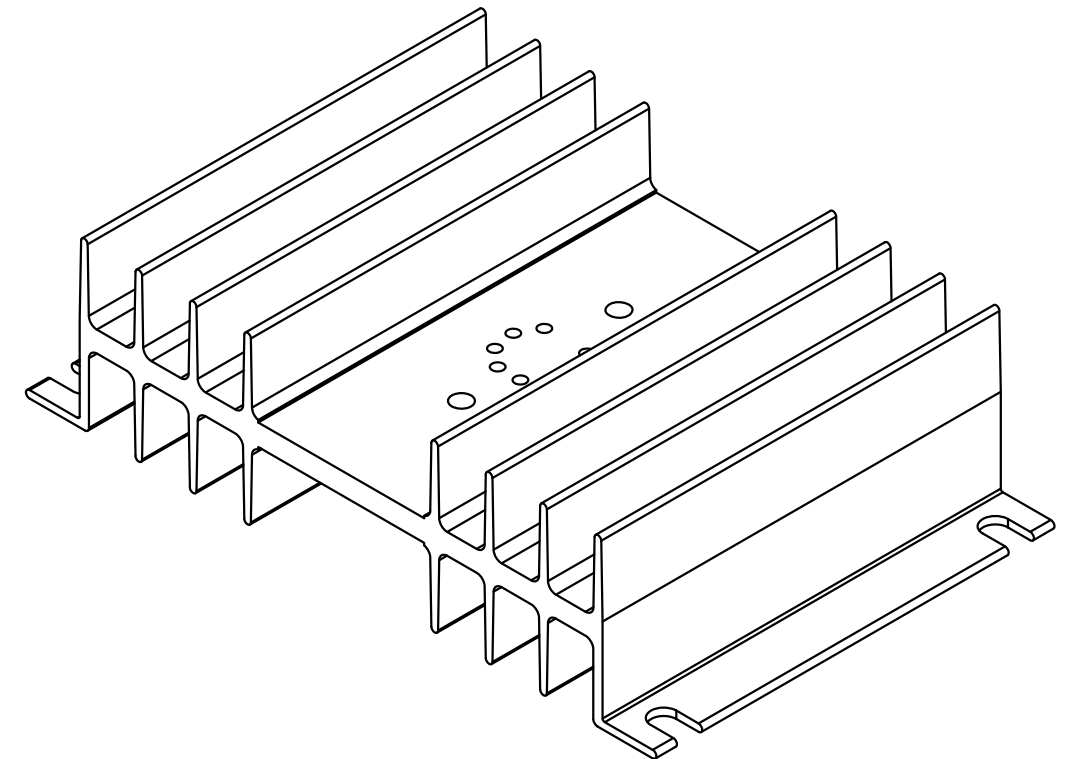


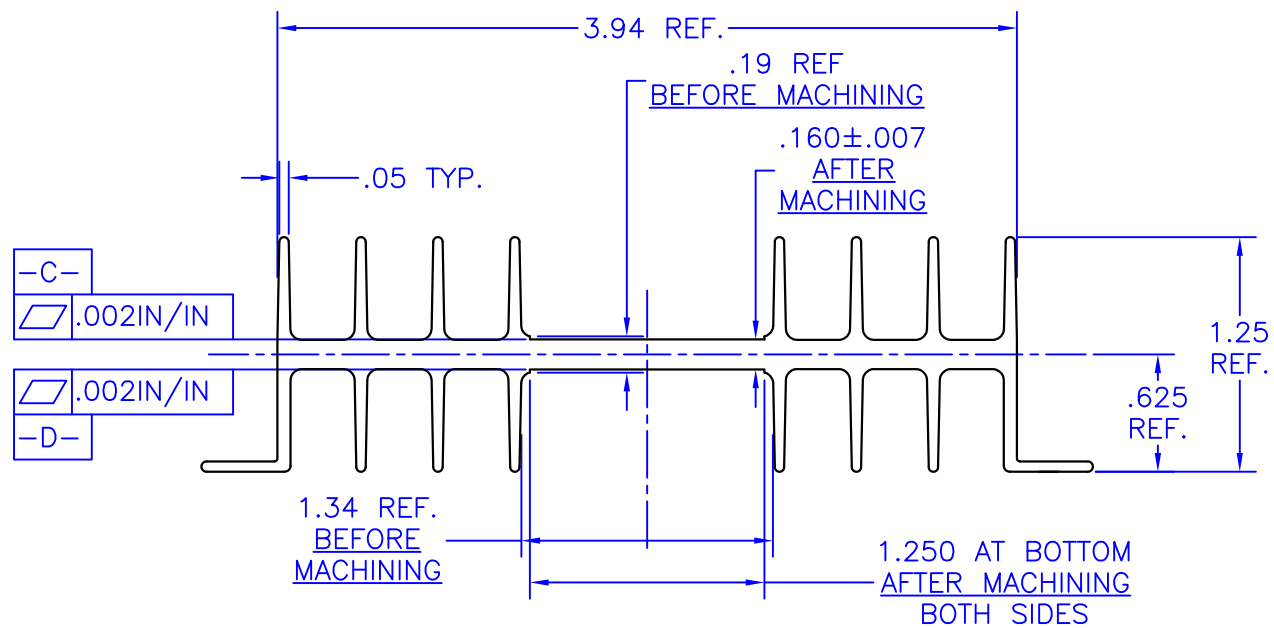

1. Unless otherwise noted, all dimensions are in inches.
2. Break all sharp edges, de-burr & remove loose chips.
3. Material: 6063-T5 aluminum (AAVID Thermalloy extrusion 60050)
4. Finish: Anodize per MIL-A-8625, Type II, Class 2, Black
Typical breakdown voltage > 300V
5. Mark with contrasting ink as shown, if specified by P.O.
6. Approximate Weight: 6.2 oz [176g]

TOLERANCES - UNLESS OTHERWISE SPECIFIED		TITLE: HEATSINK, TO-3					MODEL: HS03		
		SUBJECT: MECHANICAL DRAWING							
.XX = ±.05 [.002]		ENGINEER:	DRAWN BY:	DCAI:	SH.	OF	FILENAME:	REV:	DATE:
.XXX = ±.005 [.0002]		D-M	P.ECK	12434	1	1	HS03	H	14NOV12
ANG. = ±2°									