

4

3

2

1

D

D

C





C

B

B

A

A

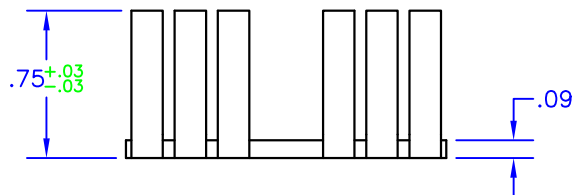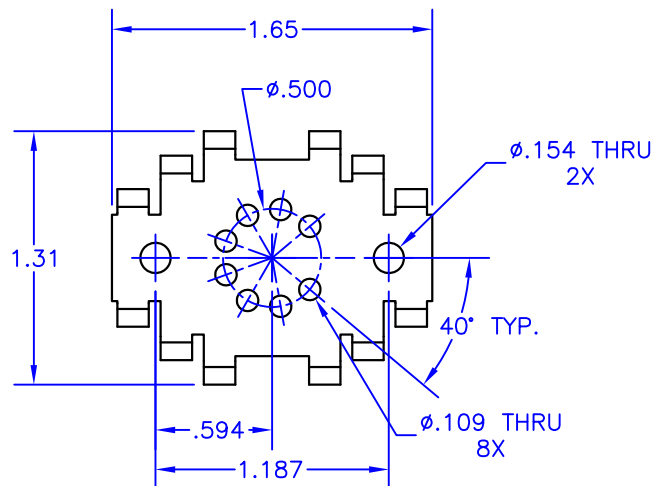

NOTES:

1. Unless otherwise noted, all dimensions are in inches.
2. Break all sharp edges, de-burr & remove loose chips.
3. Material: Aluminum alloy.
4. Finish: Anodize per MIL-A-8625, Type II, Class 2, Black
Typical breakdown voltage > 300V.
5. Mark with contrasting ink as shown, if specified by P.O.
6. Approximate Weight: 0.4 oz [11g].
7. Vendor: Aavid Thermalloy Extrusion 329241.

TOLERANCES - UNLESS
OTHERWISE SPECIFIED

.XX = ± 0.05 [.002]
.XXX = ± 0.005 [.0002]
ANG. = $\pm 2^\circ$



TITLE:

HEATSINK, T03

SUBJECT:

MECHANICAL DRAWING

ENGINEER:

D-M

DRAWN BY:

P.ECK

DCA:

12434

SPL

1

OF

1

MODEL:

HS09

FILENAME:

HS09

REV:

E

DATE:

14NOV12

4

3

2

1