


### CONNECTOR WITH COVER CLOSED

### SPRING LOADED COVER WITH GASKET

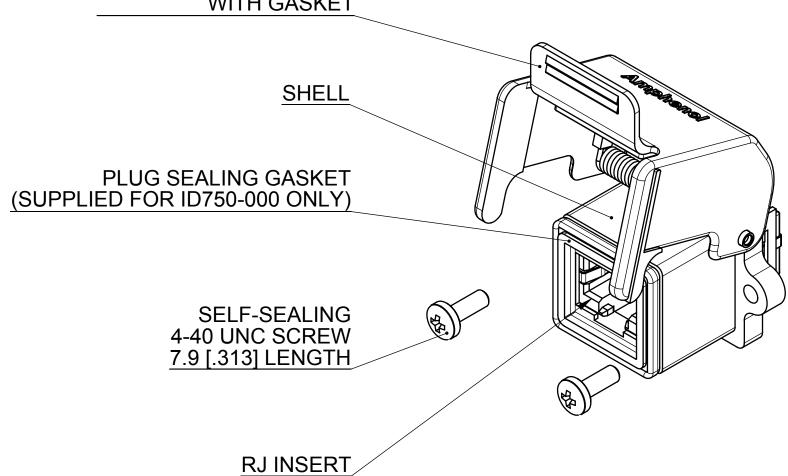


#### NOTES:

- 1. MATERIAL:
   SHELL: ZINC ALLOY DIE CAST, 3 MICRONS [120 μ"] MIN NICKEL OVERALL.
   COVER: ZINC ALLOY DIE CAST, 3 MICRONS [120 μ"] MIN NICKEL OVERALL.
   SCREWS: STAINLESS STEEL.
   HOUSING: HIGH TEMPERATURE THEMOPLASTIC, GLASS FILLED.
  - FLAMMABILITY RATING UL94V-0, COLOR BLACK.
     CONTACTS: PHOSPHOR BRONZE, 1.27 MICRONS [50 μ"] GOLD PLATED OVER NICKEL.
     GASKETS: SILICONE RUBBER.
- 2. OPERATING TEMPERATURE: -40°C TO +85°C.
- 3. ENVIROMENT PERFORMANCE: IP67.
- 4. CONNECTOR IS ROHS COMPLIANT PER EU DIRECTIVE 2002/95/EC AND AMENDMENTS.
- 5. CONNECTOR IS ETHERNET CAT5 TEST COMPLIANT PER TIA/EIA 568B ISO/IEC 11801 STANDARD.
- 6. PART NUMBER FOR ORDER IS ID450-000.




UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETER		APPROVALS	DATE	Amphenol Canada Corp.			
TOLERANCES ARE		DRAWN S.SEMENOV	FEB27/07	Amphenoi Canada Corp.			
.XX ± .10 .X ± .25	± 1°	DESIGNED S.SEMENOV	FEB27/07	TITLE			
MATERIAL AND FINISH  REF.		CHECKED		RJ RECEPTACLE			
		QA APP'D					
		IE APP'D		SIZE C	DWG. NO. P-ID450-000		REV.
CODE IDENT. NO.		DWG APP'D A.GREEN	FEB27/07	SCALE 2:1	PROJECT ID		OF 2

DO NOT SCALE DRAWING THIS DOCUMENT COTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

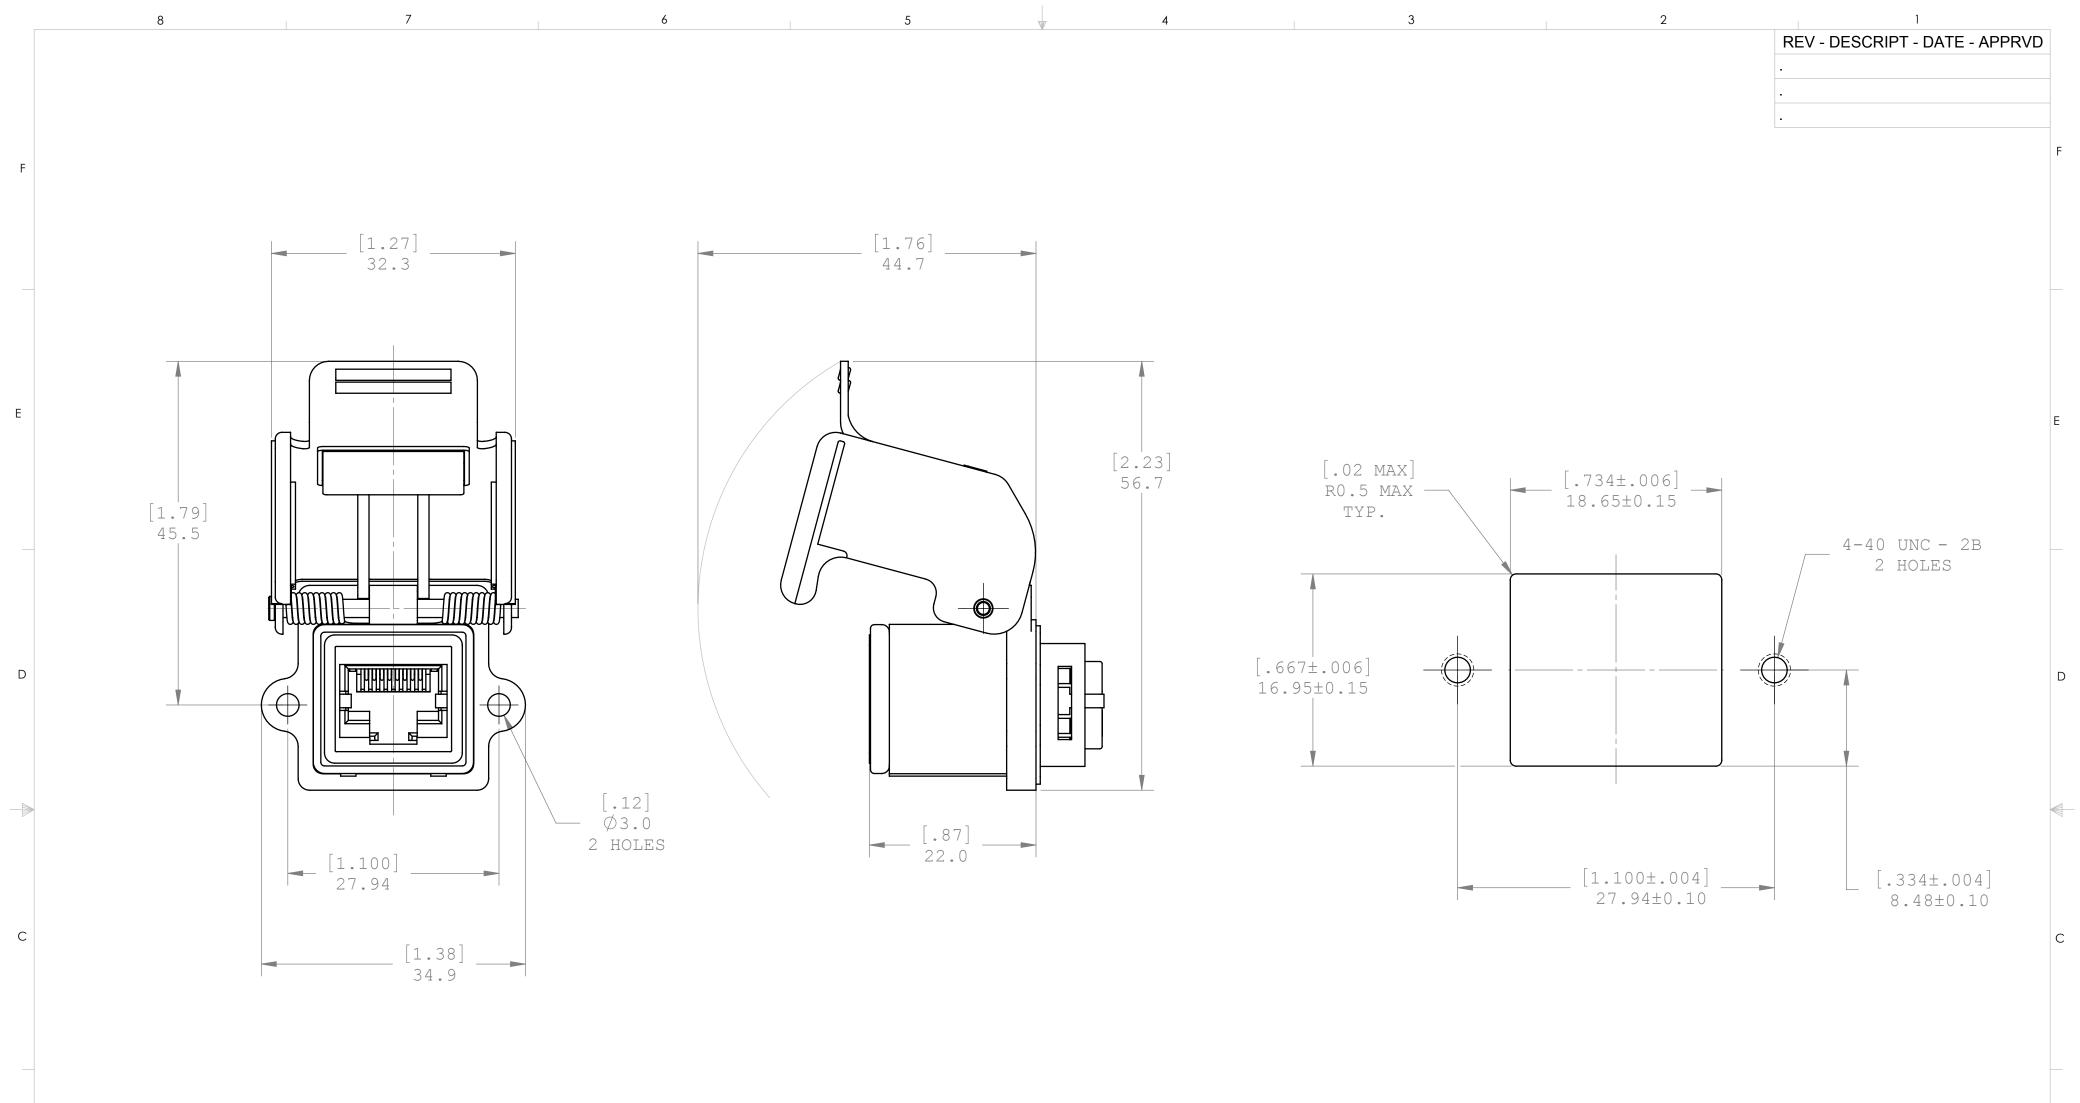

# CONNECTOR WITH COVER OPENED

## PANEL CUTOUT

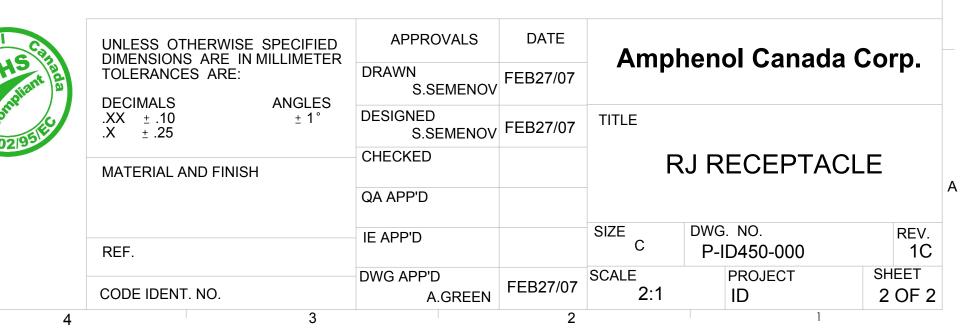

DO NOT SCALE DRAWING THIS DOCUMENT COTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.