

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

POS 1


POS 2

POS 3


POS 4

POS 5

MATING SIDE VIEW

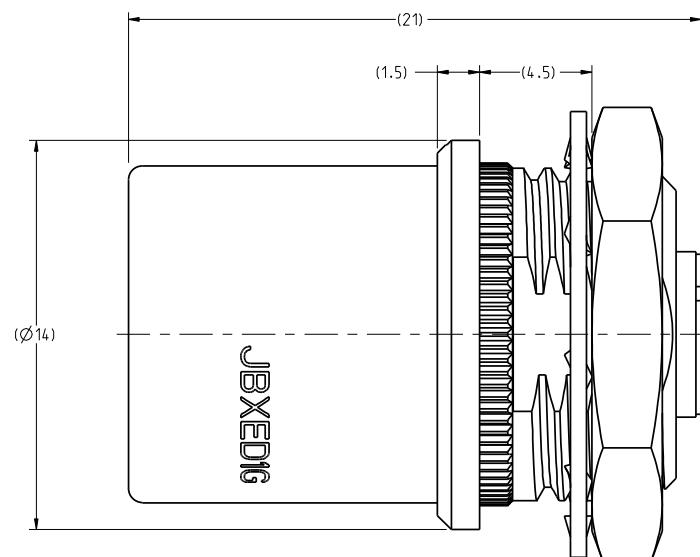

OUTER SHELL : SHIELDING RING : NUT :	}	BRASS CuZn40Pb3 (C38500/C36000)
SOCKET CONTACT (CRIMP) :		CUPRO-NICKEL CuNi1Pb1P (CDAC 19150)
CLIP :		BERYLLIUM COPPER CuBe1.9 (C17200/C36000)
INSULATOR :		PEEK WITH 15% GLASS FILLED, COLOR BROWN
<u>FINISH:</u>		
OUTER SHELL :		CHROME OVER NICKEL UNDERCOAT
OTHER BRASS PARTS EXCEPT SOCKET CONTACTS :		NICKEL
SOCKET CONTACTS :		GOLD AS PER MIL-G-45204C TYPE 1, CLASS 00.

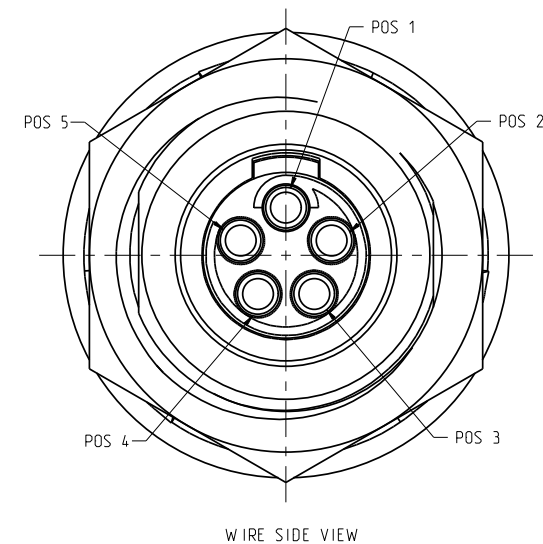

APPROVAL	DRAWN: RKO	01-01-11
	CHKD : TW	01-01-11
	DSGN : XXX	mm-dd-yy
	MFG : DH	01-01-11
	QC : DK	01-01-11
DRAWING SCALE: 6:1		
DRAWING NO.		REV
JBXEDIG05FCSDSRC		A
1 OF 2		

A

