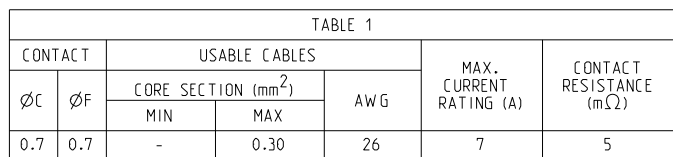





A

ENDURANCE:	500 CYCLES AS PER MIL-STD 1344A, METHOD 2016.1
SHOCK:	50 g , DURATION 6 ms; AS PER MIL-STD 1344A, METHOD 2004.1
VIBRATIONS:	10 TO 2000Hz γ = 15 g, AS PER MIL-STD 1344A, METHOD 2005.1
PROTECTION INDEX:	IP 40 AS PER CEI 529
OPERATING TEMPERATURE: WITH PLASTIC COLLETS:	-55°C TO +125°C (-67°F TO +257°F)
WITH OPTIONAL METALLIC COLLETS: (ONLY ON REQUEST)	-55°C TO +200°C (-67°F TO +392°F)



LINEAR MEASURE:	 (INCH)	 (INCH)
THIRD ANGLE PROJECTION		
		
TOLERANCES		
UNLESS OTHERWISE SPECIFIED		
No. OF PLACES	mm (INCH)	
WHOLE No.	± 0.5 [$\pm .02$]	
ONE PLACE	± 0.2 [$\pm .008$]	
TWO PLACES	± 0.1 [$\pm .004$]	
ANGLES $\pm 1^\circ$		