

"High Frequency Ceramic Solutions"

5.25 GHz Chip Antenna

P/N 5250AT43A200


Detail Specification Page 1 of 3

Part Number	Frequency (MHz)	Peak Gain (XZ-V)	Ave. Gain (XZ-V)	Return Loss
5250AT43A200_	5150 - 5350	3.6 dBi typ.	-2.3 dBi typ.	9.5 dB min.

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 Ω	-40 to +85°C	1000


Mechanical Dimensions

	L	W	T	a	Terminal Configuration	
Inches	0.276 $\pm$.008	0.079 $\pm$.008	0.047 +.004 / -.008	0.020 $\pm$.012	1	INPUT
mm	7.0 $\pm$ 0.2	2.0 $\pm$ 0.2	1.20 +0.1 / -0.2	0.50 $\pm$ 0.3	2	NC

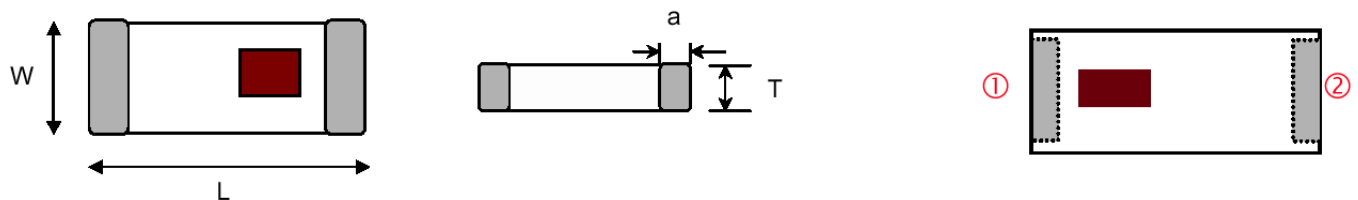

Mounting Considerations

Mount these devices with brown colored side facing up. Line width should be designed to provide 50 Ω impedance matching characteristics.

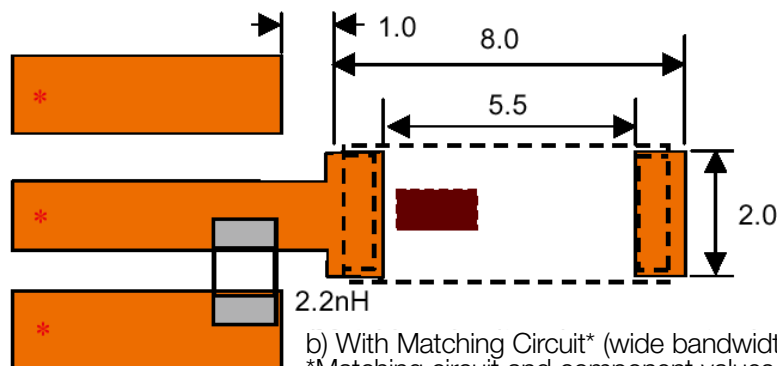

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.


"High Frequency Ceramic Solutions"

5.25 GHz Chip Antenna

P/N 5250AT43A200



Detail Specification Page 2 of 3

Test Board for Electrical Characteristic Measurements

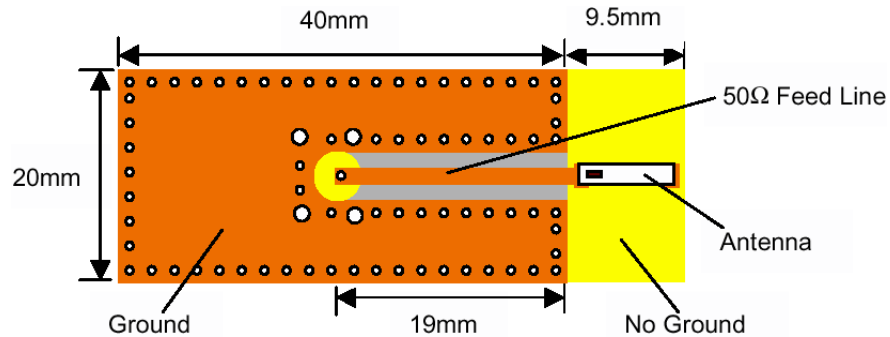

Typical Return Loss for P/N 5250AT43A200

a) With Matching Circuit

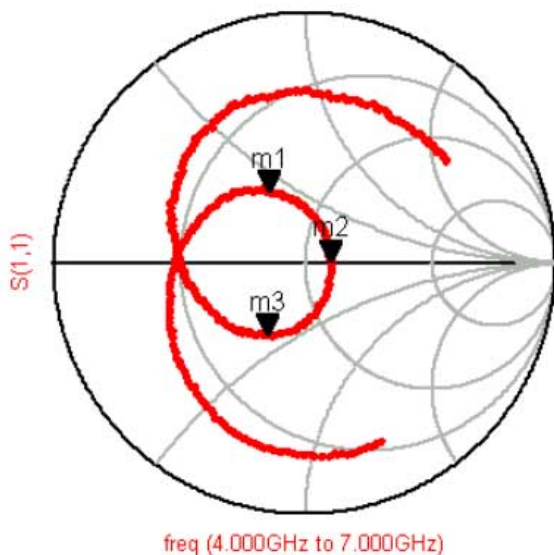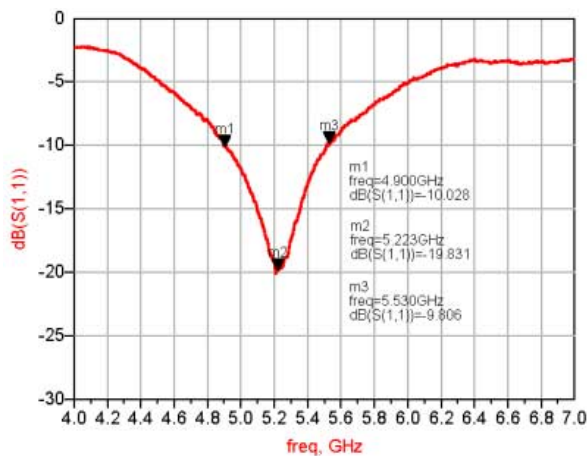

"High Frequency Ceramic Solutions"

5.25 GHz Chip Antenna

P/N 5250AT43A200

Detail Specification Page 3 of 3

Typical Radiation Patterns for P/N 5250AT43A200

