
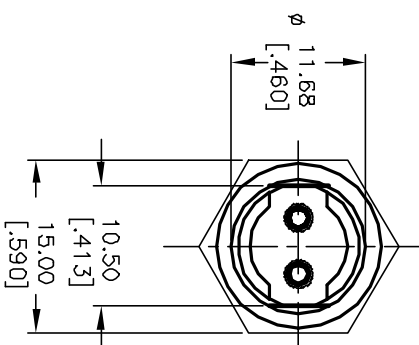
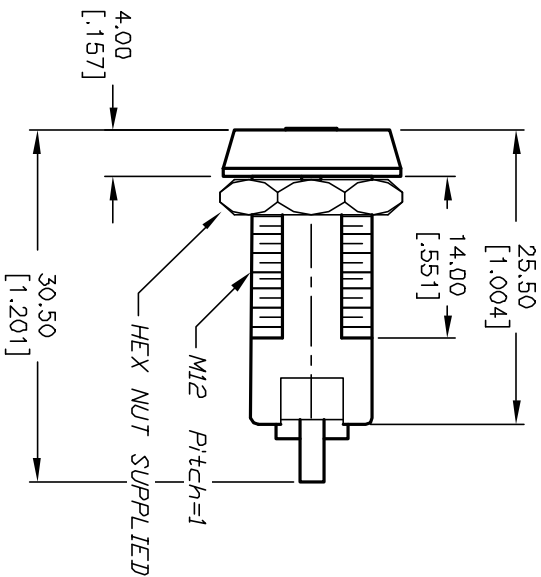


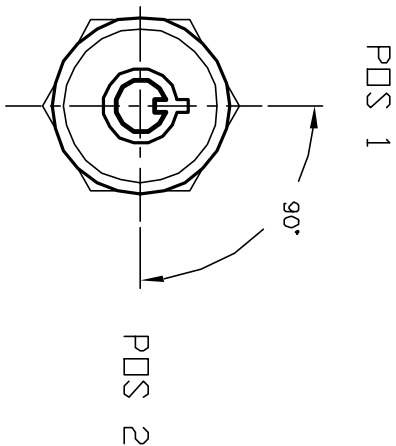


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FDR REFERENCE ONLY.
4. RATING: 1A @125VAC, 0.5A @250VAC
5. CONTACT RESISTANCE: 10mILLI-OHMS
6. DIELECTRIC STRENGTH: 1000 VAC-1Minute
7. INSULATION RESISTANCE: 200 Mega-OHMS min.
8. MATERIALS:

HOUSING: ZINC ALLOY DIE CAST
CYLINDER: ZINC ALLOY W/CHROME PLATING
TERMINAL AND CONTACTS: SILVER PLATED
KEYS (2) KEY CODE 701: TUBULAR
ZINC ALLOY, CHROME PLATING

CIRCUIT: SPST
CONTACT CONFIGURATION

SWITCH FUNCTION	
POS 1	POS 2
↗	⇒
DNF	DN




LEGEND

○ =OFF POSITION

■ =INDICATES KEY PULL
X =INDICATES NO KEY PULL

RECOMMENDED PANEL CUTOUT



REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	11743	RELEASED FOR PRODUCTION	10/15/01	CJB

TITLE				
K0103A-701				
E-SWITCH®				
SCALE	DATE	DR	DWG	REV
1.5:1	10/15/01	CJB	K100202	A