
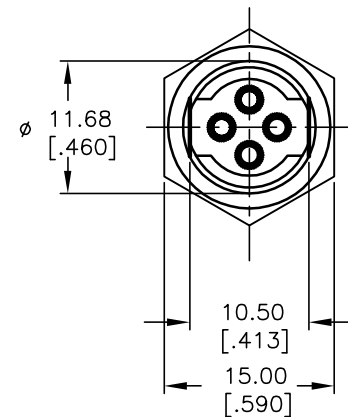
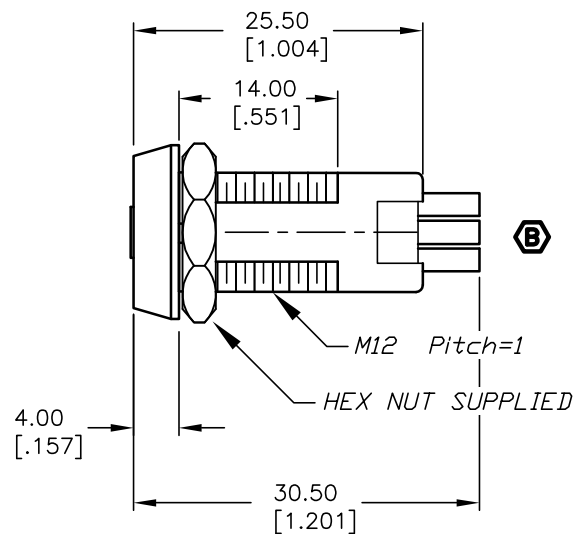


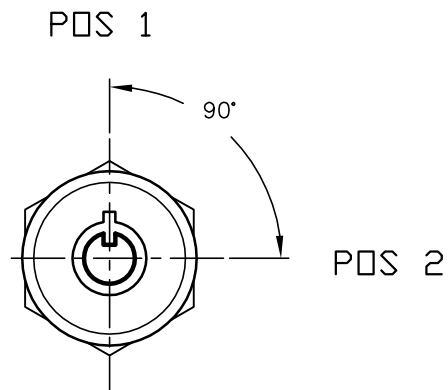


CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION	
POS 1	POS 2
↑	→
ON	ON

LEGEND

○ =OFF POSITION

■ =INDICATES KEY PULL

X =INDICATES NO KEY PULL

RECOMMENDED PANEL CUTOUT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 1A @125VAC, 0.5A @250VAC
5. CONTACT RESISTANCE: 10mILLI-OHMS
6. DIELECTRIC STRENGTH: 1000 VAC-1Minute
7. INSULATION RESISTANCE: 200 Mega-OHMS min.
8. MATERIALS:

HOUSING: ZINC ALLOY DIE CAST

CYLINDER: ZINC ALLOY W/CHROME PLATING

TERMINAL AND CONTACTS: SILVER PLATED

KEYS (2) KEY CODE 701: TUBULAR

ZINC ALLOY, CHROME PLATING

E-SWITCH®

B	14336	CORRECT SIDE VIEW	9/22/04	AR
A	11743	RELEASED FOR PRODUCTION	10/15/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE

K0103C-701

SCALE

1.5:1

DATE

10/15/01

DR

CJB

DWG

K100204

REV

B