
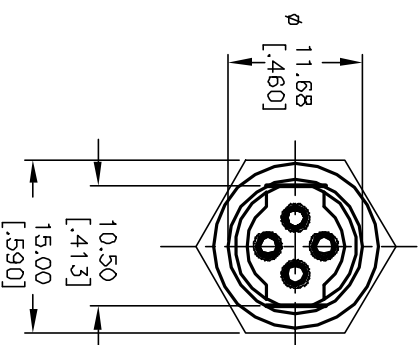
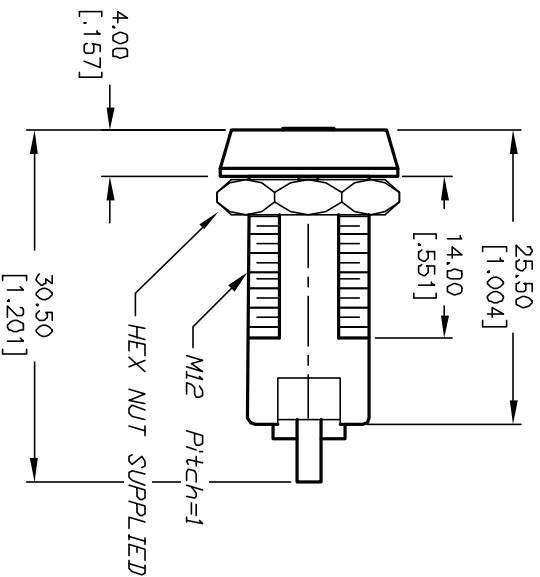



CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION	
POS 1	POS 2
↗	⇒
DN	DN



LEGEND

- = OFF POSITION
- = INDICATES KEY PULL

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FDR REFERENCE ONLY.
 4. RATING: 1A @125VAC, 0.5A @250VAC
 5. CONTACT RESISTANCE: 10mILLI-OHMS
 6. DIELECTRIC STRENGTH: 1000 VAC-1Minute
 7. INSULATION RESISTANCE: 200 Mega-OHMS min.
 8. MATERIALS:

HOUSING: ZINC ALLOY DIE CAST
CYLINDER: ZINC ALLOY W/CHROME PLATING
TERMINAL AND CONTACTS: SILVER PLATED
KEYS (2) KEY CODE 701: TUBULAR
ZINC ALLOY, CHROME PLATING

TITLE				E-SWITCH®			
A	11743	RELEASED FOR PRODUCTION	10/15/01	CJB	K0103D-701		
REV.	ECN No.	DESCRIPTION	DATE	CHKD	K100205		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				SCALE	DATE	DR	REV
				1.5:1	10/15/01	CJB	A