

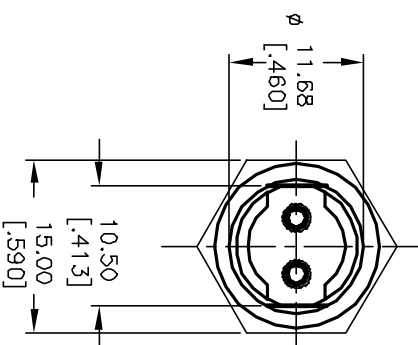
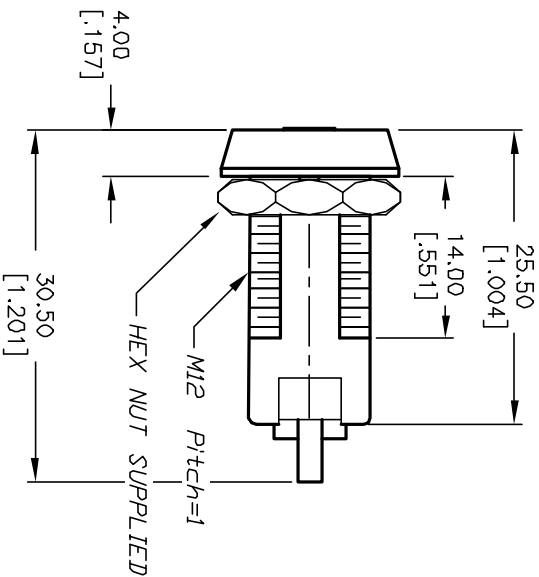




- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FDR REFERENCE ONLY.
 4. RATING: 1A @125VAC, 0.5A @250VAC
 5. CONTACT RESISTANCE: 10mILLI-OHMS
 6. DIELECTRIC STRENGTH: 1000 VAC-1Minute
 7. INSULATION RESISTANCE: 200 Mega-OHMS min.
 8. MATERIALS:

HOUSING: ZINC ALLOY DIE CAST
CYLINDER: ZINC ALLOY W/CHROME PLATING
TERMINAL AND CONTACTS: SILVER PLATED
KEYS (2) KEY CODE 701: TUBULAR
ZINC ALLOY, CHROME PLATING

LEGEND

- =Detent Positions
- ⊙ =Key pull possible in these positions
- ▲ =MOMENTARY POS.

CIRCUIT: SPST 90° INDEXING
CONTACT CONFIGURATION

SWITCH FUNCTION	
POS 1	POS 2
↕	⇒
DNF	(DN)

RECOMMENDED PANEL CUTOUT

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
B	12768	DESC WAS WRONG	CJB
A	12768	RELEASED FOR PRODUCTION	CJB
REV.	ECN No.	DESCRIPTION	DATE
TITLE			
K0103E-701			
SCALE			
1.5:1			
DATE			
1/27/03			
DR			
CJB			
DWG			
K100206			
REV			
B			