



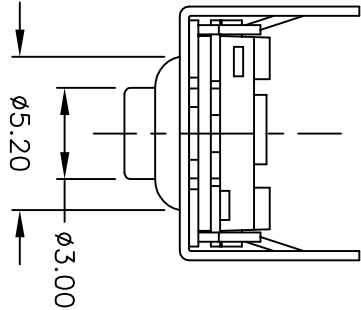



RECOMMENDED P.C.B. LAYOUT

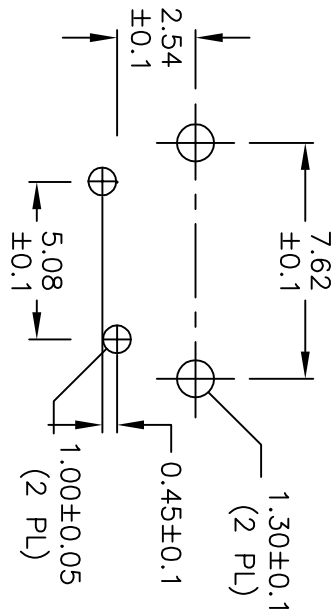

CIRCUIT: SPST
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. ACTUATION FORCE: 130±32gf
5. TRAVEL TO MAKE: 0.3mm +0.4/0.0
6. RATING: 30mA, @12V DC
7. CONTACT RESISTANCE: 50 mΩ-ΩHMS (Initial)
8. DIELECTRIC STRENGTH: 300 VAC FOR 1 MIN.
9. ELECTRICAL LIFE CYCLE: 400,000 make & break cycles at full load.
10. ▲ DESIGNATE MAJOR DIMENSIONS.
11. OPERATING TEMP: -40°C to +80°C
12. 2002/95/EC (ROHS) COMPLIANT

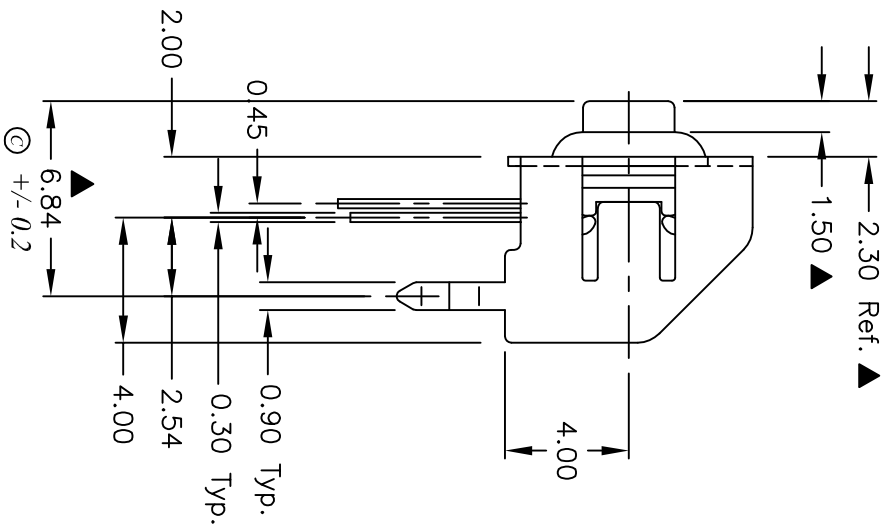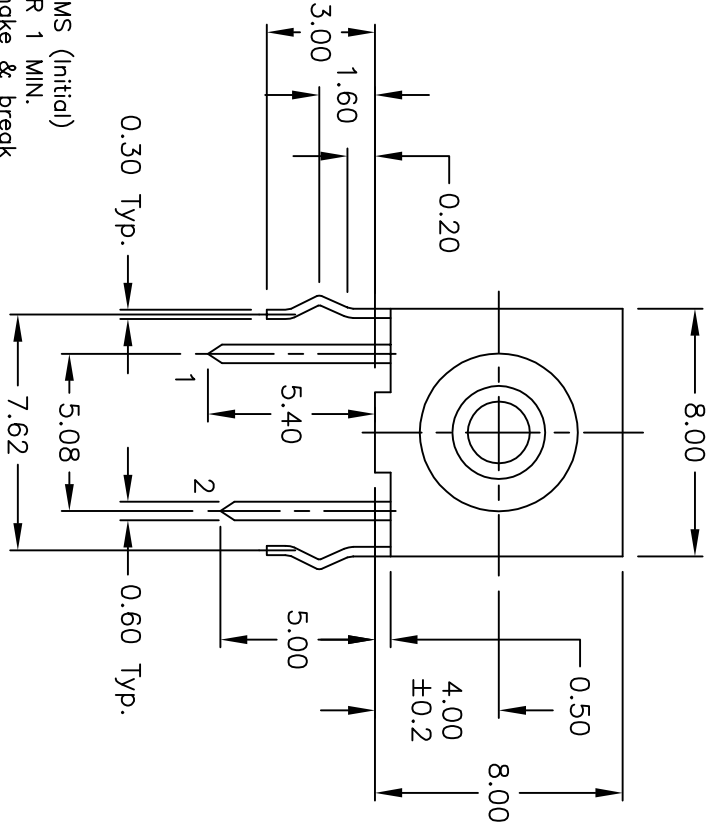

C	18193	BUTTON LENGTH TOLERANCE CHG.	7/31/08	BLR
B	15473	WASHABLE INFO FROM DESC.	10/28/05	PH
A	15181	RELEASED FOR PRODUCTION	8/31/05	PH
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE				
GSR 6.84 F130 QP				
SCALE	DATE	DR	DWG	REV
4:1	7/31/08	BLR	L300002	C

