

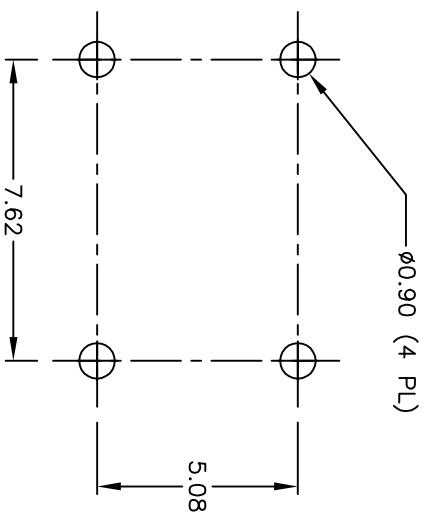
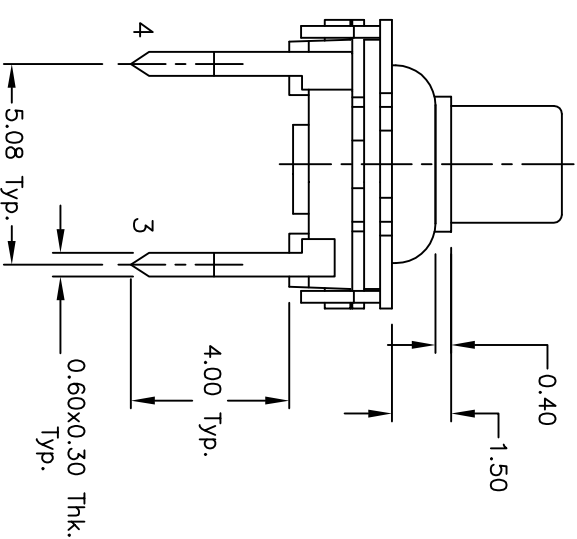
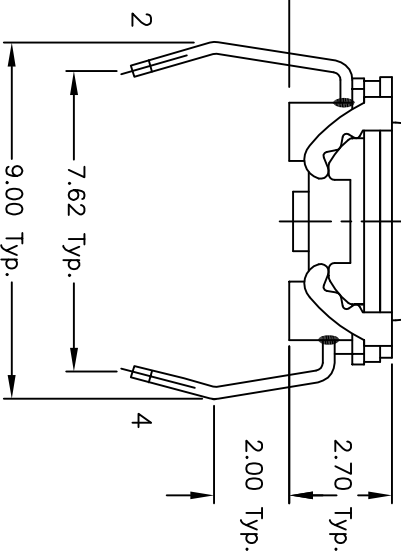
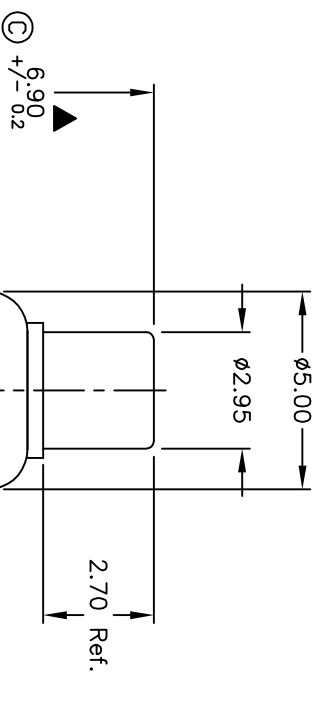
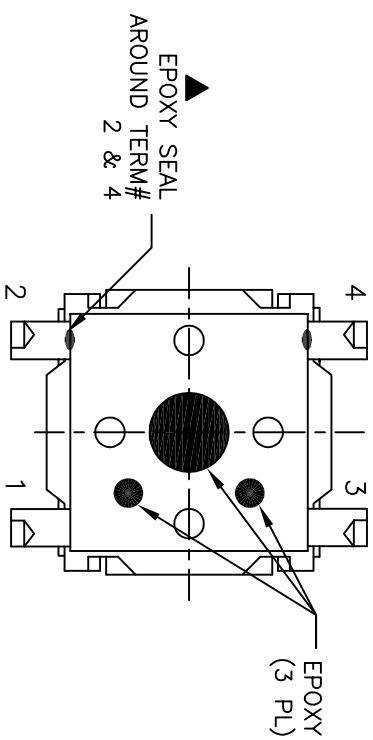


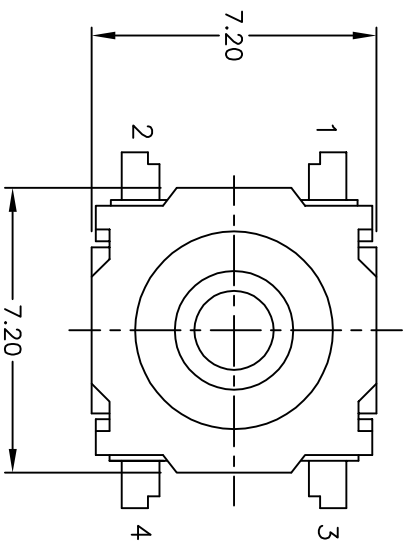

RECOMMENDED P.C.B. LAYOUT

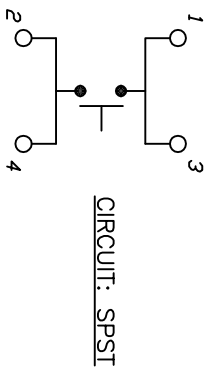

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
- ▲4. ACTUATION FORCE: 300±75gf
5. TRAVEL TO MAKE: 0.3mm +0.4/-0.0
6. RATING: 30mA, @12V DC
7. CONTACT RESISTANCE: 50 milli-ohms typical
8. DIELECTRIC STRENGTH: 300V RMS min at sea level.
9. ELECTRICAL LIFE CYCLE: 1,000,000 make & break cycles at full load.
- ▲10. DESIGNATE MAJOR DIMENSIONS.
11. 2002/95/EC (ROHS) COMPLIANT

C	18193	BUTTON LENGTH TOLERANCE CHG.	7/31/08	BLR	 TITLE GSS6.90 F300 QP	SCALE	DATE	DR	DWG	REV
B	15479	EPDXY ADDED	4/26/02	CJB						
A	12096	RELEASED FOR PRODUCTION	4/26/02	CJB						
REV.	PCR No.	REV. DESCRIPTION	DATE	CHKD						
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED										