



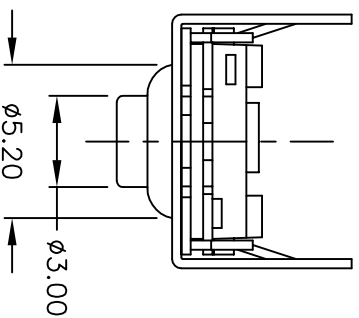



RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. ACTUATION FORCE: $160 \pm 40\text{gf}$
5. TRAVEL TO MAKE: $0.3\text{mm} + 0.4/0.0$
6. RATING: 50ma, 50V DC (GOLD CONTACTS)
7. CONTACT RESISTANCE: 50 m Ω -OHMS (Initial)
8. DIELECTRIC STRENGTH: 300 V RMS min at sea level.
9. ELECTRICAL LIFE CYCLE: 400,000 make & break cycles at full load.
10. ▲ DESIGNATE MAJOR DIMENSIONS.
11. OPERATING TEMP: -40°C to $+80^{\circ}\text{C}$
12. 2002/95/EC (ROHS) COMPLIANT

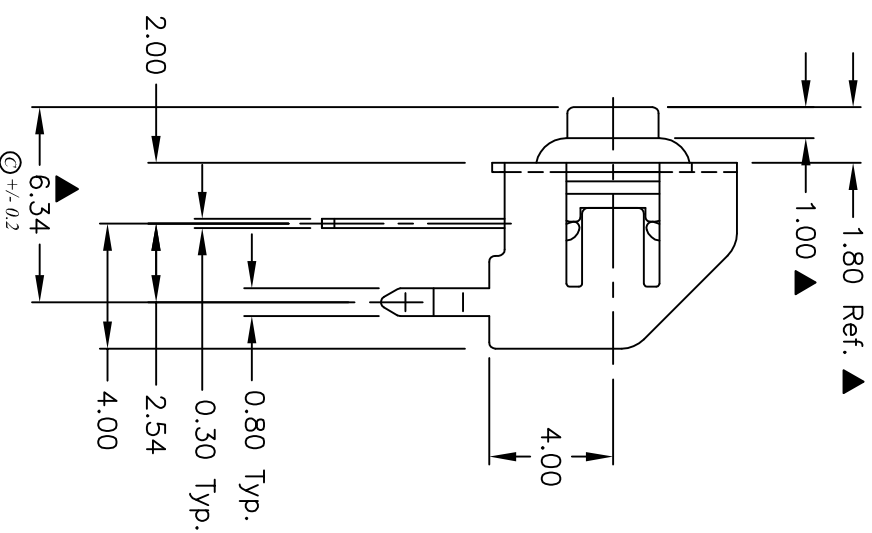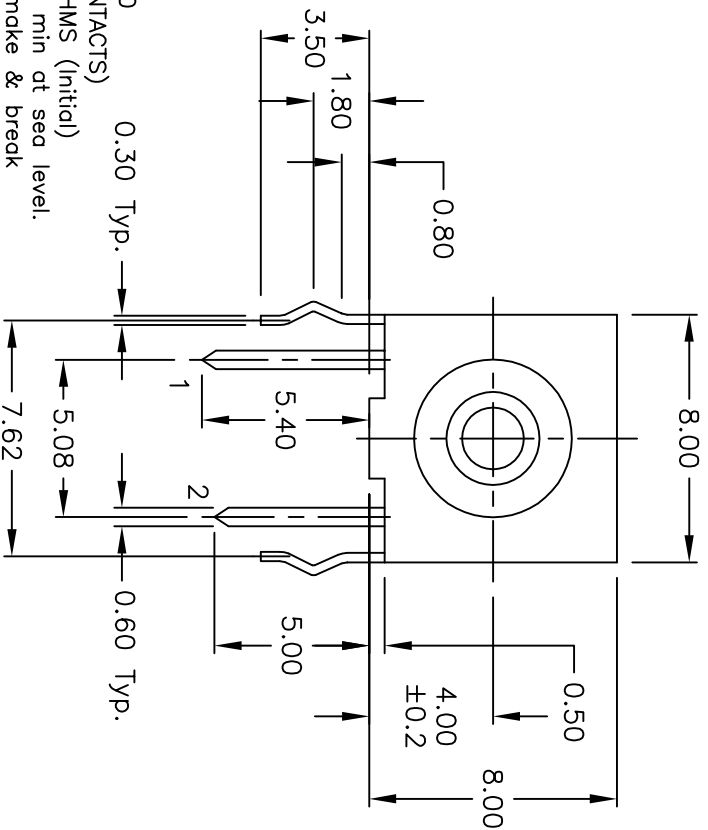

C	18193	BUTTON LENGTH TOLERANCE CHG.	7/31/08	BLR	 E-SWITCH™ GSR 6.34 F160 RP (GOLD CONTACTS)
B	15489	WASHABLE FROM DESCRIPTION	11/2/05	PH	
A	12247	RELEASED FOR PRODUCTION	6/18/02	CB	
REV.	ECN No.	DESCRIPTION	DATE	CHKD	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					

SCALE	DATE	DR	DWG	REV
4:1	7/31/08	BLR	L300021	C