
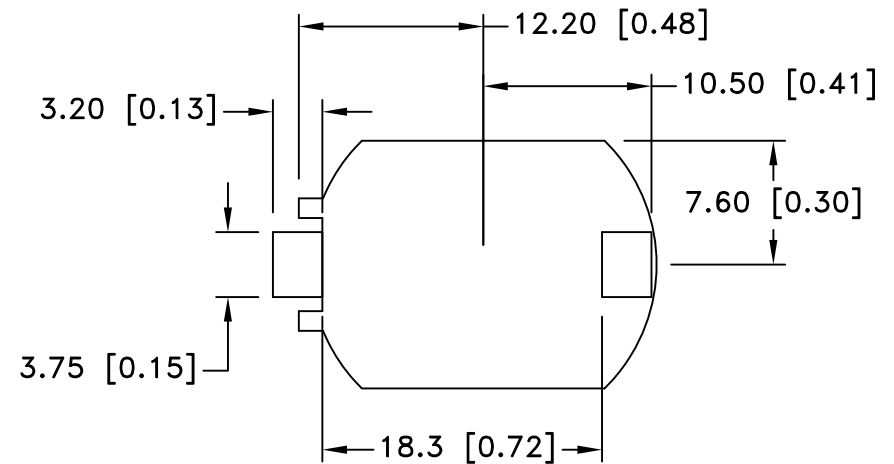


Date	SYM	REVISION RECORD	AUTH	DR.	CK.

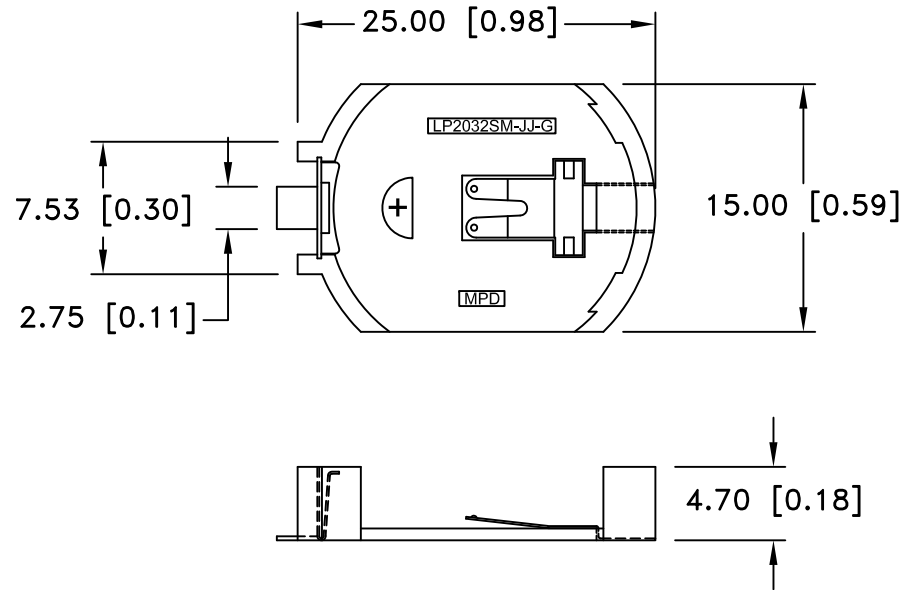

PCB LAYOUT

#### SPECIFICATIONS:


- \* Holder material- 30% glass reinforced Liquid Crystal Polymer resin, UL File No. E123598, UL94V-0
- \* Color: White
- \* Contacts : 0.020" thick Stainless steel 301, 3/4 hard , GOLD FLASH over nickel
- \* Temperature range: -40°C to +280°C

Vibration Test: 10-50-10 Hz swept in 60 seconds

X,Y,Z direction: 1 hour each direction, No dislodgement of the cell or damage, No discontinuity over 10 micro-seconds

Shock Test: Half sine wave acceleration 150g. 6 micro-seconds, 3 shock pulses each direction per axis, total of 18 pulses, No evidence of physical damage

ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Title SURFACE MOUNT BATTERY HOLDER FOR CR2032		Scale Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)			
Angular ± 3°	Date 02/22/13	Drawing Number LP2032SM-JJ-GTR	