

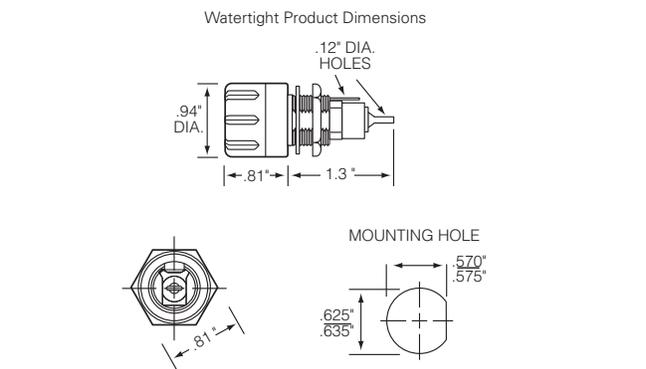


342 Series Panel Mount Enclosed Fuse Holders for 3AG Fuses

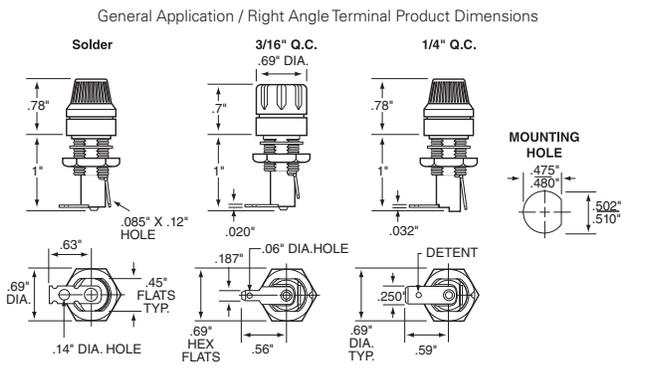

Dimensions

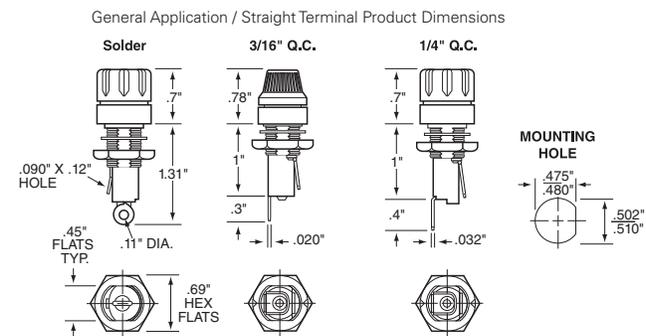

Product Characteristics

| | General Application Products | Watertight Product |
|----------------------------|---|---|
| Compatible Fuses | 3AG | |
| Electrical | Rated at 20 amperes for any voltage up to 250 volts. | |
| Ambient Temperature | -40°C to +85°C. | |
| Dielectric Strength | 2400 volts minimum. | 1500 volts minimum. |
| Mounting | Withstands 15 lb.-in. mounting torque; maximum panel thickness: .187" | Withstands 15 lb.-in. mounting torque; maximum panel thickness is .250" |
| Molded Parts | Black thermoplastic (UL94 V-0). | Black thermoset (UL94 V-0). |
| Seal | Not Applicable | O-ring provides a watertight seal on the front side of the panel per MIL-PRF-19207. |
| Terminals | Copper & copper alloy. Tin plated, except 1/4" Quick-Connect terminals are nickel plated. | Copper & copper alloy. Tin plated. |
| Hardware | Not Applicable | O-rings (2) and hex nut, unassembled. |

Agency Approvals

| Agency | Agency File Number |
|---|--------------------------------------|
|  | IZLT2.E14721 |
|  | 007316 (*Except 342 006 and 342 012) |

Ordering Information

| | Body Terminal Type | | Catalog Number | |
|--------------------------------------|--------------------|----------------|----------------|------------------|
| | Angle | Connect | Fluted Knob | Knurled Knob |
| General Application Products: | | | | |
| Straight | Solder | | 342 014 | 342 012 * |
| | 3/16" Q.C. | | 342 038 | 342 058 |
| | 1/4" Q.C. | | 342 838 | 342 858 |
| Right Angle | Solder | | 342 004 | 342 022 |
| | 3/16" Q.C. | | 342 028 | 342 048 |
| | 1/4" Q.C. | | 342 828 | 342 848 |
| Watertight Product: | | | | |
| Straight | Solder | Not Applicable | | 342 006 * |

NOTE: Ensure that proper fuse de-rating is factored in fuseholder selection.