


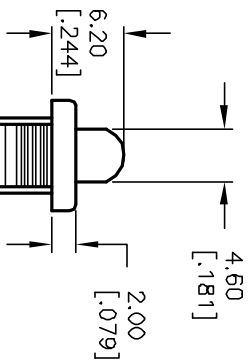


PANEL THICKNESS	X dimension
0.75-1.25 [0.30-0.49]	19.2- <i>0.1</i> [7.56]
1.25-2.0 [0.49-0.79]	19.4- <i>0.1</i> [7.64]
2.0-3.0 [0.79-1.18]	19.8- <i>0.1</i> [7.80]




SWITCH FUNCTION	
POS. 1	POS. 2
ON	OFF
1-1a	OPEN

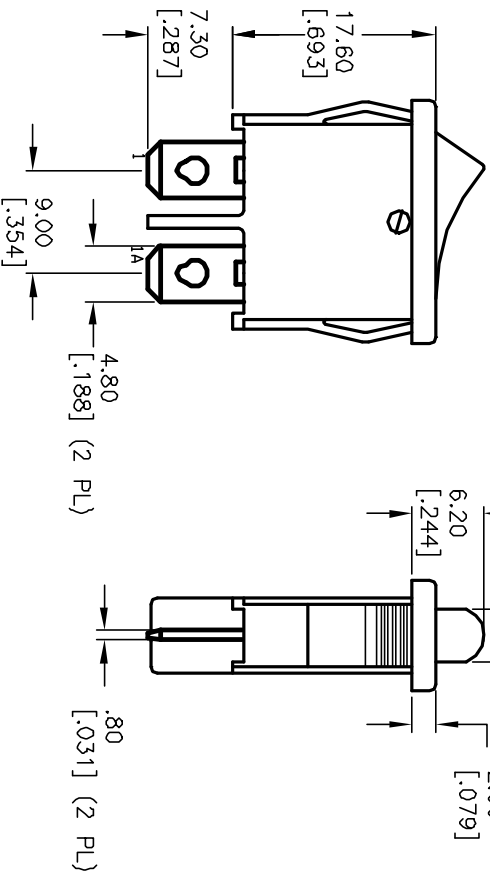

NOTES:

CIRCUIT: SPST

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$; $X.XX = \pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 4(1)A @250VAC, 6A @250VAC
10A @125VAC
5. MATERIALS: TERMINALS: COPPER ALLOY W/SILVER PLATING
CONTACTS: COIN SILVER
6. MECHANICAL LIFE: >50,000 CYCLES
7. ELECTRICAL LIFE: >10,000 CYCLES
8. CONTACT RESISTANCE: < 20 MEGA-OHMS (INITIAL)
9. INSULATION RESISTANCE: > 1000 MEGA-OHMS @ 500VDC
10. DIELECTRIC STRENGTH: >1500VAC 1 MINUTE (INITIAL)
>3000V BETWEEN POLES

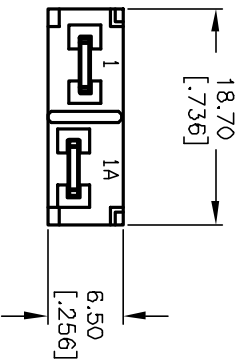

				TITLE					
				R6A BLK BLK A F					
A	11383	RELEASED FOR PRODUCTION	10/25/01	CJB	SCALE	DATE	DR	DWG	REV
REV.	ECN No.	DESCRIPTION	DATE	CHKD	1.5:1	10/25/01	CJB	M060300	A
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									