


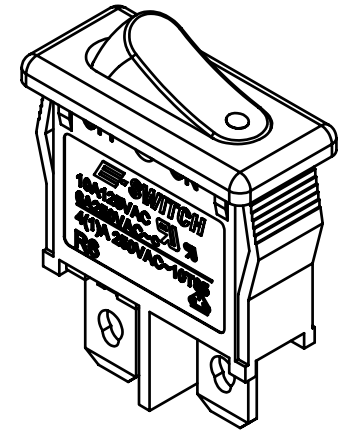


RECOMMENDED P.C.B. PANEL MOUNTING



PANEL THICKNESS	X
0.75-1.25	19.2-19.3
1.25-2.00	19.25-19.35
2.00-3.00	19.3-19.4

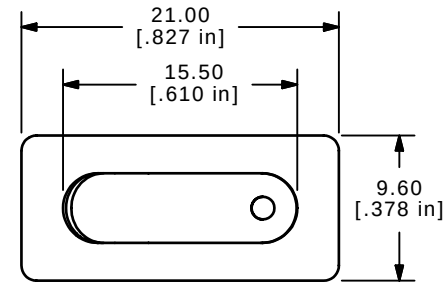

HOUSING COLOR:
BLACK

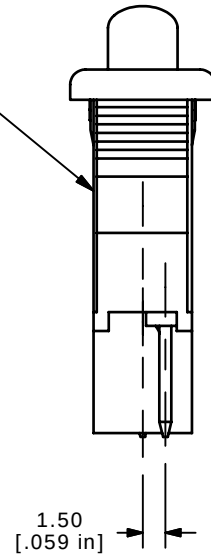

ACTUATOR COLOR:
RED

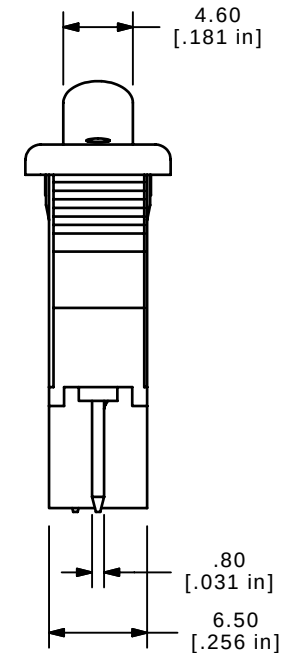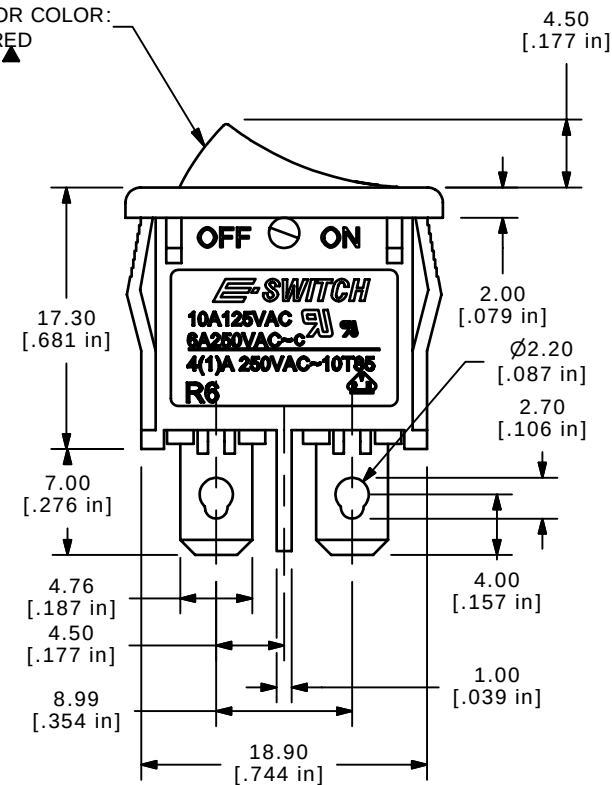

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X ± 0.4
X.XX ± 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 6A @ 250VAC
5. MATERIAL: BODY & ROCKER, NYLON 6/6 UL94 V-2
6. CONTACT RESISTANCE: 20 MILLI-OHMS
7. ELECTRICAL LIFE: 10,000 CYCLES
8. DIELECTRIC STRENGTH: 1,500V FOR 1 MIN
9. ▲ DENOTES CRITICAL PARAMETER.
10. 2002/95/EC (ROHS) COMPLIANT

B	15821	ADD ROHS, REMOVE DEM, SEM NEM, FI	2/27/06	PH
A	15565	RELEASED FOR PRODUCTION	11/30/05	PH
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE R6ABLKREDAF

SCALE 2:1

DATE 11/30/2005

DR PH

DWG M060303

REV B