



PARAMETERS	SYMBOL	MAX.	UNITS
LAMP VOLTAGE (AC/DC)	V	24	V
POWER DISSIPATION	P _D	2	Watts
CURRENT	I	50	mA

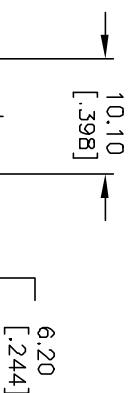

PANEL THICKNESS	X dimension
0.75-1.25 [0.30-.049]	19.2-01 [7.56]
1.25-2.0 [0.49-.079]	19.4-01 [7.64]
2.0-3.0 [0.79-.118]	19.8-01 [7.80]

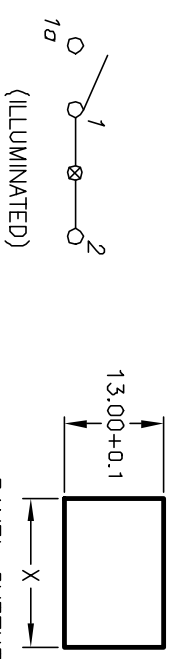

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25

$$X.XX=\pm 0.25$$

- 6A @250VAC:3A @125VAC (UL, CSA, VDE)
4(1)A @250VAC

CONTACT SURFACE: Coin Silver, Silver Plate

6. CONTACT RESISTANCE: 20MILLIOHMS TYP. INITIAL TERMINAL: Copper Alloy W/ Silver Plate

7. INSULATION RESISTANCE: 1000Megaohms
8. DIELECTRICAL STRENGTHS >1500V RMS min. @SEA LEVEL >3000V RMS @SEA LEVEL
9. MECHANICAL LIFE: 50,000 CYCLES.
10. ELECTRICAL LIFE: 10,000 CYCLES.



			TITLE			
			R1973A BLK YEL FF4			
A	11692	RELEASED FOR PRODUCTION	10/01/01	CJB		
REV.	ECN No.	DESCRIPTION	DATE	CHKD		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED						
SCALE			DATE	DR	DWG	REV
1.5:1			10/01/01	CJB	M400055	A