

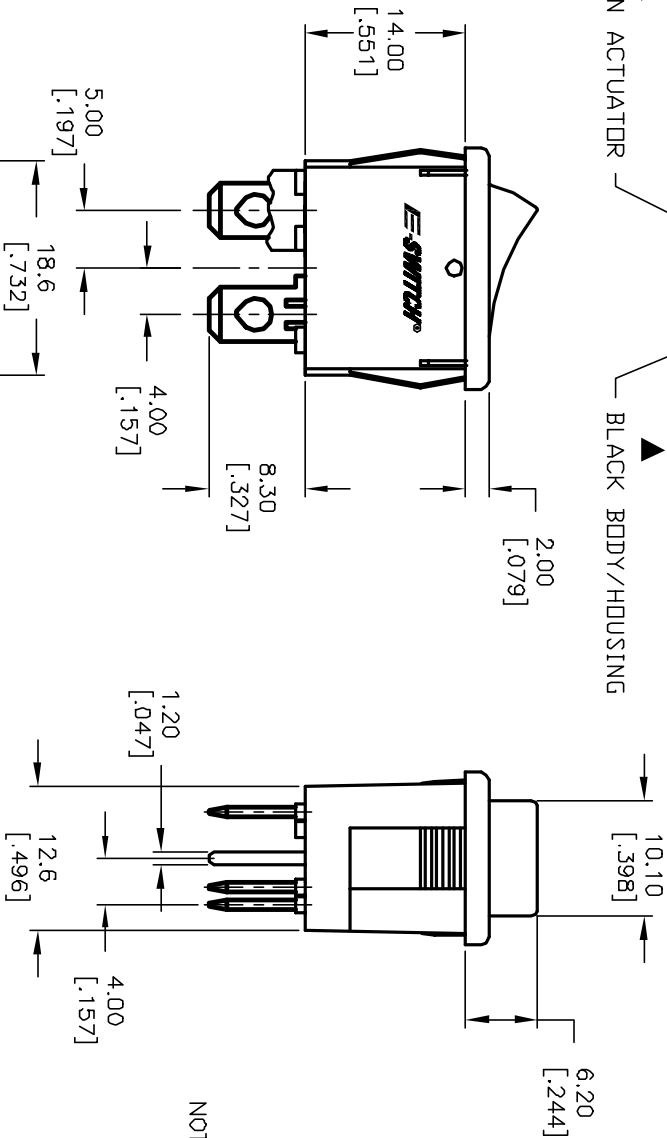


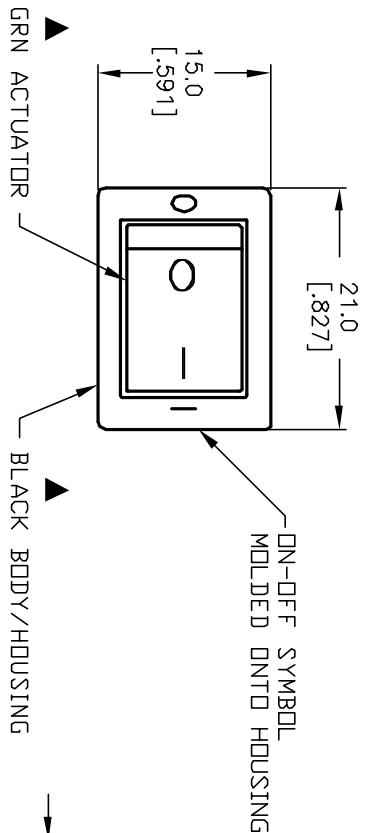

NEON BULB			
PARAMETERS	SYMBOL	MAX.	UNITS
LAMP VOLTAGE (AC)	V	250	V
STARTUP VOLTAGE	V _s	95	V
CURRENT	I	0.8	mA
SERIES RESISTANCE (<250V)	R	270	OHMS

PANEL THICKNESS	X dimension
0.75-1.25 [1.030-.049]	19.2-01 [1.7561]
1.25-2.0 [1.049-.079]	19.4-01 [1.764]
2.0-3.0 [1.079-.118]	19.8-01 [1.7801]

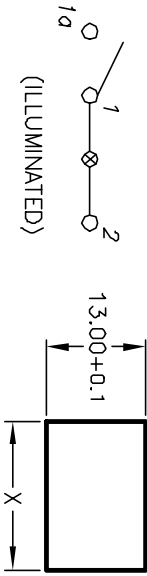

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING:
6A @250VAC;9A @125VAC (UL, CSA, VDE)
4(1)A @250VAC

4. LAMP VOLTAGE: 250V (NEON BULB)
5. MATERIAL:
CONTACT SURFACE: Coin Silver, Silver Plate

- TERMINAL: Copper Alloy W/ Silver Plate.
6. CONTACT RESISTANCE: 20MILLIOHMS TYP. INITIAL
 7. INSULATION RESISTANCE: 1000MEG OHMS
 8. DIELECTRIC STRENGTH:
>1500V RMS min. @SEA LEVEL
>3000V RMS @SEA LEVEL
 9. MECHANICAL LIFE: 50,000 CYCLES.
 10. ELECTRICAL LIFE: 10,000 CYCLES.

E-SWITCH®

TITLE			
A	12009	RELEASED FOR PRODUCTION	3/22/02
REV.	ECN No.	DESCRIPTION	DATE
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE			
1.5:1			
DATE			
3/22/02			
DR			
CC			
DWG			
M400057			
REV			
A			