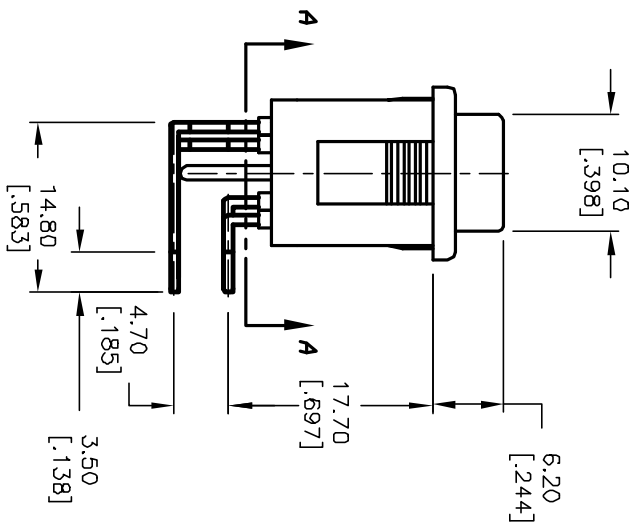
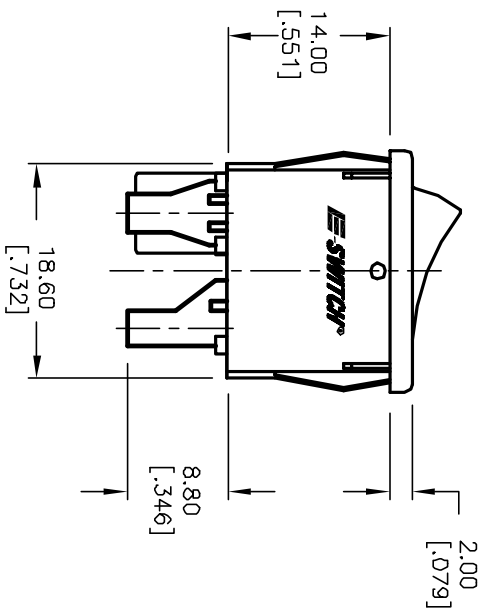
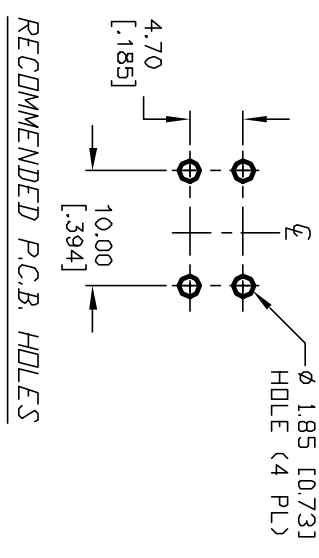

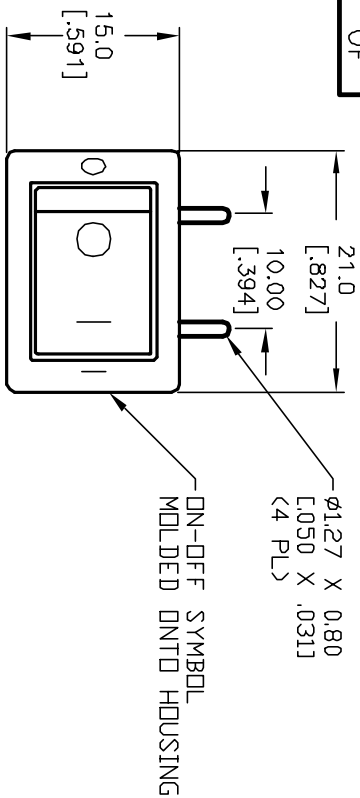


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 6A @250VAC;9A @125VAC (UL, CSA)
4(1)A @250VAC (VDE, SEMEKO, NEMKO, FIMKO, DEMKO)
4. CONTACT RESISTANCE: 20miliohms TYP. INITIAL
5. INSULATION RESISTANCE: 1000Megaohms
6. DIELECTRICAL STRENGTHS 1500V RMS min. @SEA LEVEL
3000V RMS @SEA LEVEL
7. MECHANICAL LIFE: 50,000 CYCLES.
8. ELECTRICAL LIFE: 10,000 CYCLES.

PANEL THICKNESS	X
0.75-1.25 [0.030-.049]	19.2 [0.756]
1.25-2.0 [0.049-.079]	19.4 [0.764]
2.0-3.0 [0.079-.118]	19.8 [0.780]

RECOMMENDED PANEL MOUNTING

E-SWITCH®

TITLE			
R1973B BLK BLK GLO (Left Angle)			
SCALE	DATE	DR	REV
1.5:1	6/24/02	MM	A
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND ITS NOT TO BE COPIED OR TRANSFERRED			
REV.	ECN No.	DESCRIPTION	DATE
A	12260	RELEASED FOR PRODUCTION	6/24/02