


| CONFIGURATION | PART NUMBER | CONTACT TYPE |
|--------------------------------|-------------|--------------|
| STRAIGHT EXTENSION, 9 POSITION | MB1JJN0900 | PIN |

DIMENSIONS

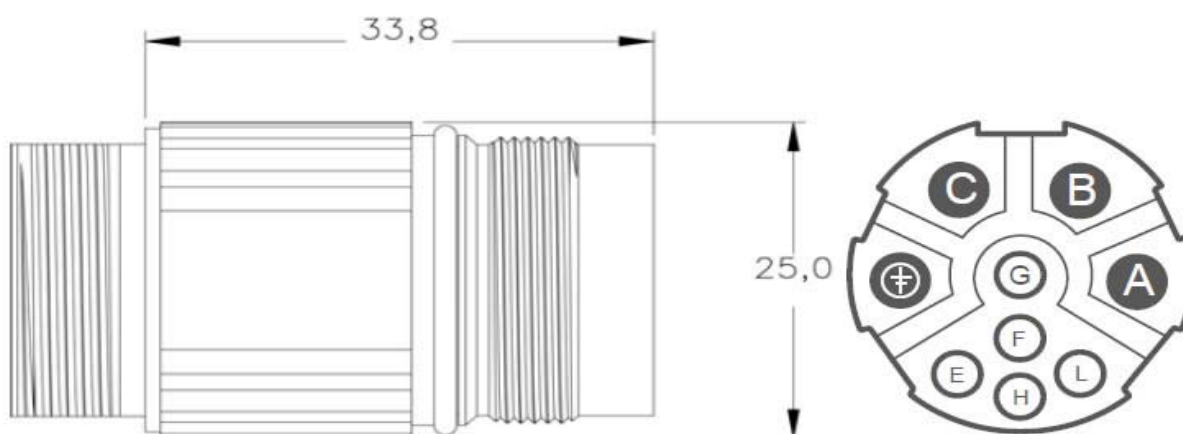

TECHNICAL DATA

| | |
|-------------------------------------|---------------------------|
| TEMPERATURE RANGE: | -20C to +130C |
| PROTECTION: | IP 67 (PLUGGED CONDITION) |
| DEGREE OF PROTECTION: | 3 |
| OVER VOLTAGE CATEGORY: | III |
| HOUSING BODY: | ZINC DIE-CAST |
| COUPLING NUT: | BRASS, NICKEL-PLATED |
| INSULATION INSERTS: | PA66 / PBT, UL 94 / VO |
| CONTACTS: | BRASS, GOLD-PLATED |
| SEALS: | DUPONT VITON |
| MAX CURRENT: | 30A |
| CONTACT SIZE: | 4 x 2.0mm / 5 x 1.0mm |
| MAXIMUM VOLTAGE: | 630AC/DC |
| CONTACT RESISTANCE: | <3 |
| TEST VOLTAGE: (BETWEEN CONTACTS) | 6000V |
| MAXIMUM MATING CYCLES: | >50 |

NOTES