PART NO.	DIM "W"	"T" APPLICATION THICKNESS
MCG–1E	.14 (3.6)	.025–.036 (0.64–.091)
MCG–2E		.037–.055 (0.93–1.40)
MCG–3E		.056–.074 (1.42–1.80)
MCG–4E	.18 (4.6)	.075–.093 (1.91–2.36)
MCG–6E		.113–.134 (1.87–3.40)

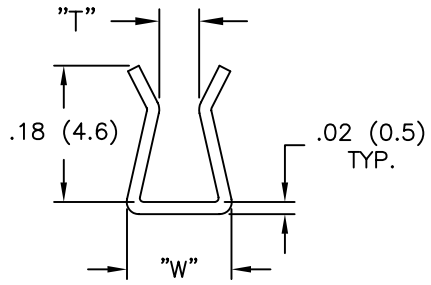

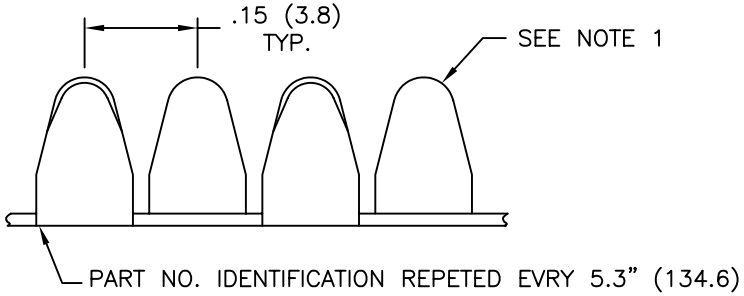

NOTES

1. MATERIAL: 304 STAINLESS STEEL.
   FINISH: EPOXY.
   COLOR: GREEN.
2. TABER ABRASION RESISTANCE: 1KG LOAD, C17 WHEEL (ASTM D 4060) 8 mg LOSS AFTER 5000 CYCLES
3. DIELECTRIC STRENGTH: 1000 VOLTS @ 60 HZ.
4. HEAT CONTINUOUS: 285°F (140°C).
5. SALT SPRAY TESTING: PER ASTM B117. MIL–STD–202, METHOD 301–1000 HOURS.
6. FLAMMABILITY: UL94–VO YELLOW CARD NO. E113553 NZMT2.
7. RANDOM VIBRATION: MIL–STD–1344 METHOD 2005.1, TEST CONDITIONS VI LETTER J.
   DURATION 8 HOURS LONGITUDINAL AND 8 HOURS PERPENDICULAR.
   rms G 41.7
8. FITS ANY TWO AXIS CONTOUR.
9. PACKAGING: 100 FT REEL.
   25 FT WITH SHEARS, AVAILABLE BY SPECIAL ORDER ONLY.
   TO ORDER, ADD SUFFIX "–PK" TO PART NO.

10. CUTTING TOOL: TO ASSURE A BURR FREE CUT
    ORDER SHEARS NO. MCGS–1

US PATENTS 4,769,966, 5,343,669, 6,300,568

REV	DESCRIPTION	ENGR	DATE
G	SEE ECN #529 FOR CHANGES	SM	11.20.02
F	SEE ECN #517 FOR CHANGES	SM	11.12.02
E	STAMPING AND NOTES ADDED.	J.L.	1.20.99
D	DIM "T" CHANGED TO .025 WAS .020	J.L.	2.9.98
C	CHART DIM'S CHANGED PER PART	JB	07.10.96
B	MCGGF DETAIL ADDED	PB	05.17.95
A	25 FT. PACK WITH SHEARS PART NO. ADDED TO TABLE	PB	083094

TITLE: METAL CONTINUOUS GROMMET

DWG IN IN (MM)

TOLERANCES UNLESS NOTED
.XX=±.010
.XXX=±.005
FRAC=±1/64
ANG=±1°

FILE # MCG–XE
MAT'L: SEE NOTES
RE: RICHCO, INC.

DWN: P.B.
DT: 05–02–94
APP:
DT:

RICHCO INC.
PO BOX 804238,CHICAGO,60680
(773) 539–4060

FINAL

PART # SEE TABLE

PRINT TYPE CA