


REV Q

FIG 2

—A: OPTION
MOLDED ALIGNMENT PIN (3 POS. MIN)
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

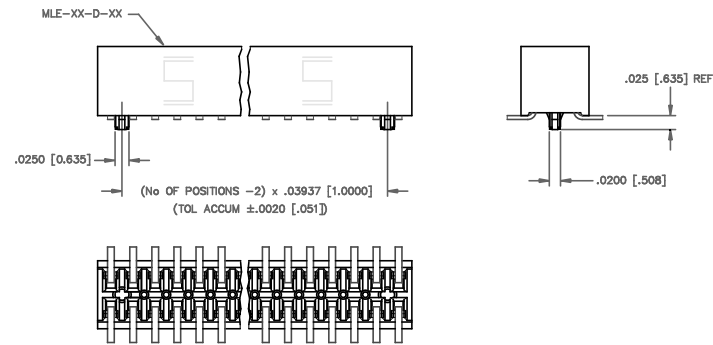

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE DECIMALS ± .1 [2.54]
TWO PLACE DECIMALS ± .01 [.254]
THREE PLACE DECIMALS ± .005 [.127]
FOUR PLACE DECIMALS ± .0020 [.051]
ANGLES ± 2°

TITLE:
1mm DUAL ROW
STRIP ASSEMBLY

DWG NO:
MLE-1XX-XX-X-DV-X
SHEET 2 OF 3


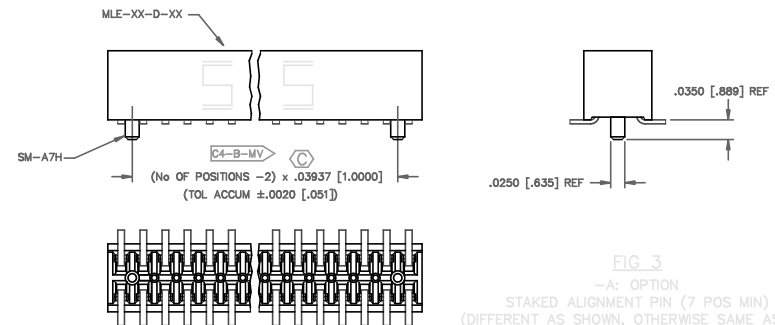


FIG 3

—A: OPTION
STAKED ALIGNMENT PIN (7 POS MIN)
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)


FIG 4

—P: OPTION
PICK & PLACE PAD
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

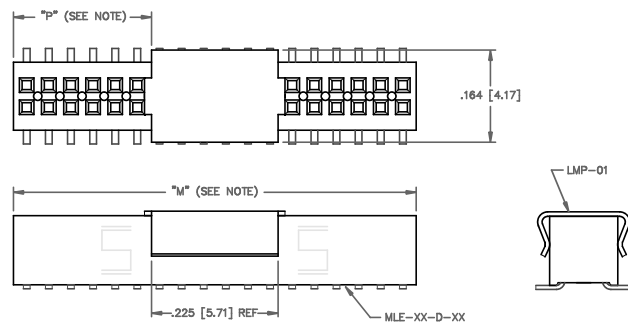

NOTE: "M" = USED MEASURED DIMENSION (REF)
"P" = (("M" - .225 [5.71]) / 2) ± .020 [.51]

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC INC. AND SHALL NOT BE
REPRODUCED OR TRANSMITTED IN
ANY FORM OR BY ANY MEANS
ELECTRONIC OR MECHANICAL,
INCLUDING PHOTOCOPYING, RECORDING,
OR BY ANY INFORMATION STORAGE
AND RETRIEVAL SYSTEM, WITHOUT
THE WRITTEN CONSENT OF SAMTEC INC.

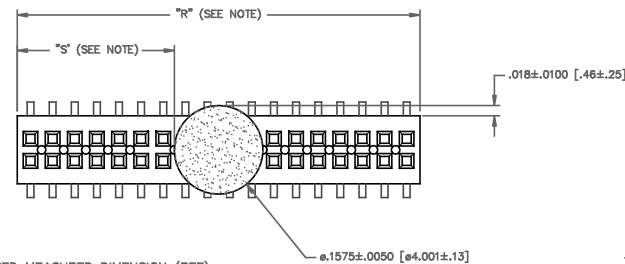


NOTE: "R" = USED MEASURED DIMENSION (REF)
"S" = (("R" - .1575 [4.000]) / 2) ± .020 [.51]


FIG 5
—K: OPTION
POLYAMIDE FILM PAD

PACKAGING VIEW
SEE NOTE 4


OPTION	TUBE	PLUG
NO OPTION, —A		
—K, —K—A	PT-1-24-01-62	TP-12
—P, —P—A		



PT-1-24-01-62



PT-1-24-01-62



PT-1-24-01-62

samtec

EXISPROD/ASSEMBLY/1MM
MLE-ASM2

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY:
D PURVIS 01-07-97

MLE-1XX-XX-X-DV-X
SHEET 2 OF 3