


DO NOT
SCALE FROM
THIS PRINT

NOTES:

1. Ⓢ REPRESENTS A CRITICAL DIMENSION.
2. MINIMUM PUSHOUT FORCE: .5 LBS.
3. DUE TO THE HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -LC OPTION IS NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -LC OPTION.



MOLC-1XX-XX-XX-Q-XX

No OF POSITIONS
-05 THRU -50

OPTION

-LC: LOCKING CLIP
USE 2 LC-05-TM
(SEE FIG 2, NOTE 3)

AM

LEAD STYLE (SEE TABLE 1)

-01: THROUGH HOLE
-11: THROUGH HOLE
-31: THROUGH HOLE
-61: THROUGH HOLE

BODY SPECIFICATION
-Q: FOUR ROW

PLATING SPECIFICATIONS

(SEE TABLE 1)

-S: SELECTIVE, 30 Au / 50 Ni MIN ON CONTACT, MATTE TIN TAIL
-SM: SELECTIVE, 30 Au / 50 Ni MIN ON CONTACT, MATTE TIN TAIL
-L: LIGHT SELECTIVE, 15 Au / 50 Ni MIN ON CONTACT, MATTE TIN TAIL


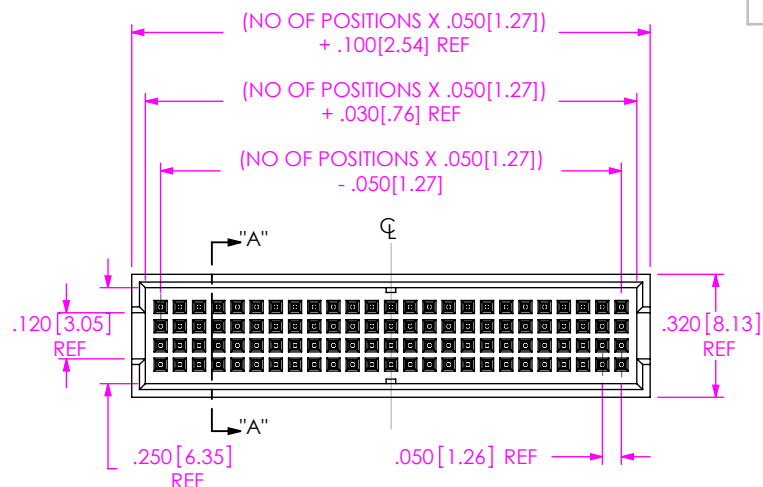
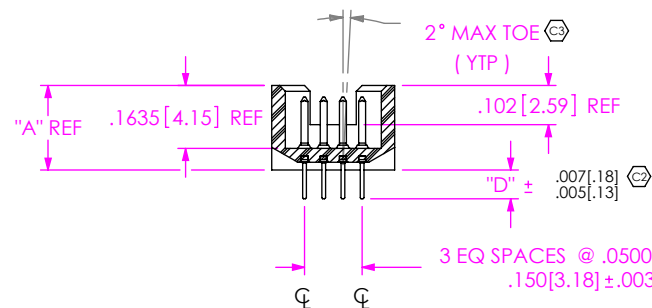
**AM**

TABLE 1

LEAD STYLE	PLATING	"A"	"B"	"C"	"D"	USE TERMINAL	USE BODY
-01	-S, -SM, -L	.2200[5.59]	.1335[3.39]	.4285[10.88]	.075[1.91]	T-1R16-01-X-2	MOLC-XX-Q-01
-11	-S, -SM, -L	.2885[7.33]	.1435[3.65]	.6400[16.26]	.075[1.91]	T-1R20-03-XXX	MOLC-XX-Q-02
-31	-S, -SM, -L	.4335[11.01]	.1435[3.65]	.6400[16.26]	.075[1.91]	T-1R20-02-XXX	MOLC-XX-Q-04
-61	-S, -SM, -L	.2200[5.58]	.1435[3.65]	.6400[16.26]	.140[3.56]	T-1R16-04-XXX	MOLC-XX-Q-01

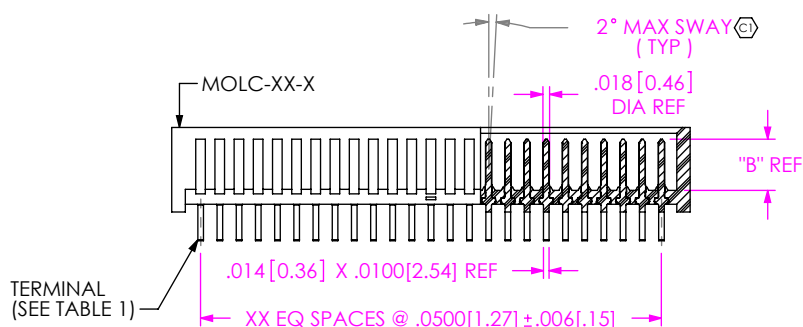

SECTION "A"- "A"

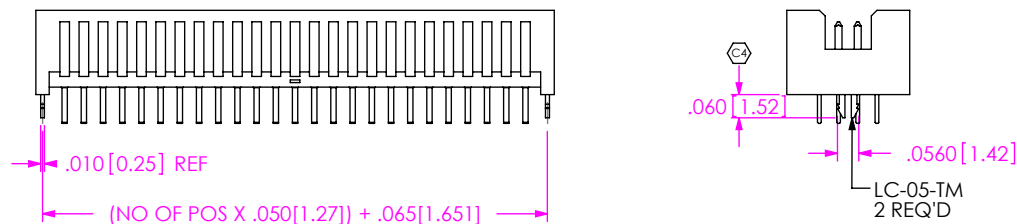


FIG 2 **AM**
- LC OPTION
SAME AS FIG 1 UNLESS OTHERWISE SHOWN

c:\enterprisevault\DWG\MISC\MKTG\MOLC-1XX-XX-XX-Q-XX-MKT.SLDDRW

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES.

TOLERANCES ARE:

DECIMALS ANGLES
.XX: ±.01 [.3] 2°
.XXX: ±.005 [.13]
.XXXX: ±.0020 [.051]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING

INSULATOR:
VECTRA E130, LCP, UL 94 V0
COLOR: BLACK

TERMINAL:
PHOS BRONZE, CA540 1/2 HARD

SHEET SCALE: 2:1

DESCRIPTION:

THROUGH HOLE .050 X .050

DWG. NO.

MOLC-1XX-XX-XX-Q-XX




BY: T WHELAN 05/23/05

SHEET 1 OF 2

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

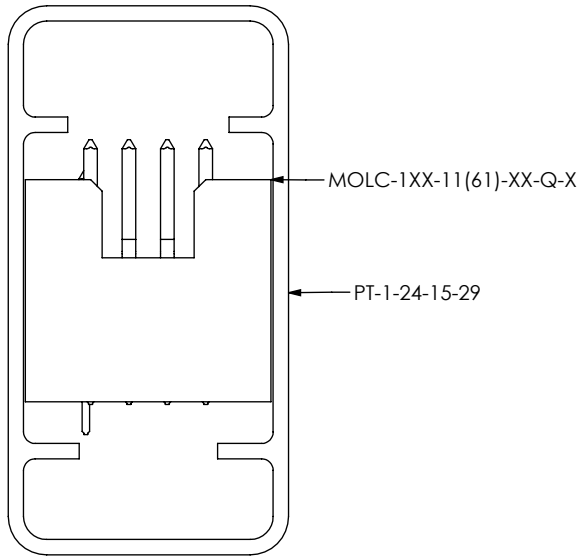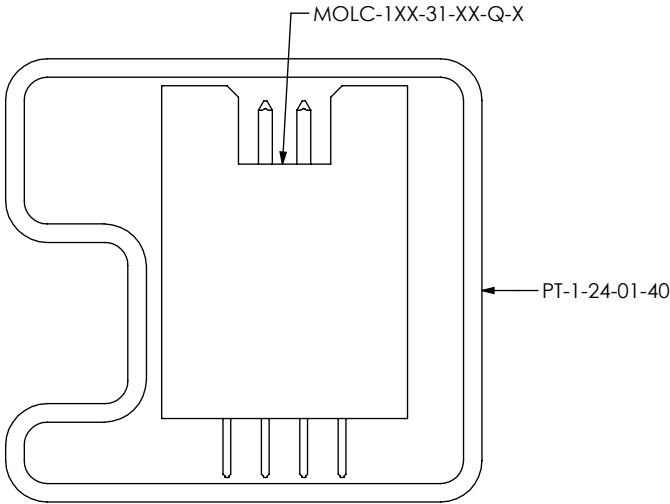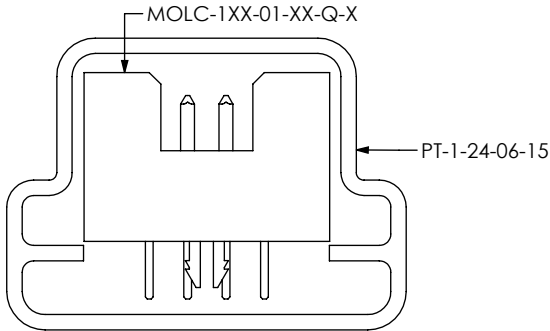FIG 4
PACKAGING VIEWS
REF TABLE 2
AM



AM

AM

TABLE 2		
LEAD STYLE	PACKAGING TUBE	PLUG
-01	PT-1-24-06-15	TP-09
-11	PT-1-24-15-29	TP-07
-31	PT-1-24-01-40	TP-13
-61	PT-1-24-15-29	TP-07

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
DECIMALS ANGLES
.XX: ±.01 [.3] 2°
.XXX: ±.005 [.13]
.XXXX: ±.0020 [.051]

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

samtec
520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 2:1

INSULATOR: VECTRA E130, COLOR: BLACK

CONTACT OR TERMINAL:

MAX FLASH ALLOWED: .002[.05]
MAX GATE VESTIGE: .002[.05]

c:\enterprisevault\DWG\MISC\MKTG\MOLC-1XX-XX-XX-Q-XX-MKT.SLDDRW

DESCRIPTION:
THROUGH HOLE .050 X .050

DWG. NO. **MOLC-1XX-XX-XX-Q-XX**

BY: T WHELAN 05/23/05 SHEET 2 OF 2