

4



3

2




1

NOTES:

1. Dimensions are in inches & [mm].
2. Socket body: Glass-filled polyester, 94 VO rating, green in color
3. Receptacle shell: 360 µin tin over 100 µin nickel
4. Receptacle contacts: Beryllium copper with 30 µin gold over 50 µin nickel
5. The continuous temperature rating of the socket shall be 150° C.
6. Contact resistance: 20 milliohms or less.

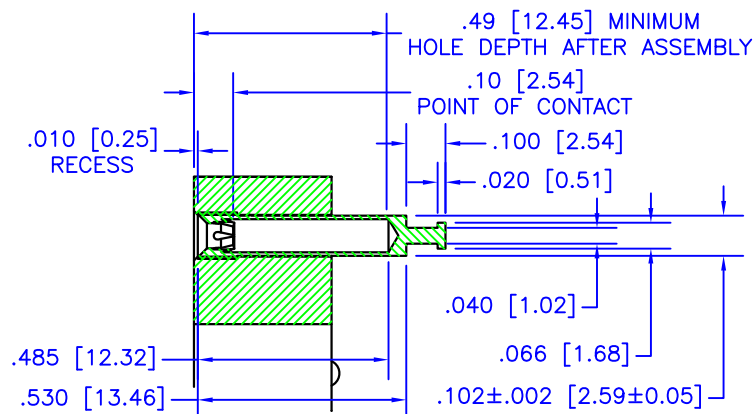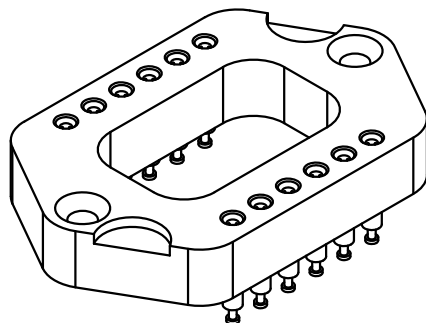

DETAIL A
SCALE 2:1

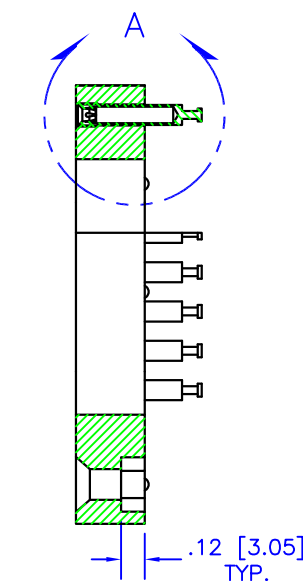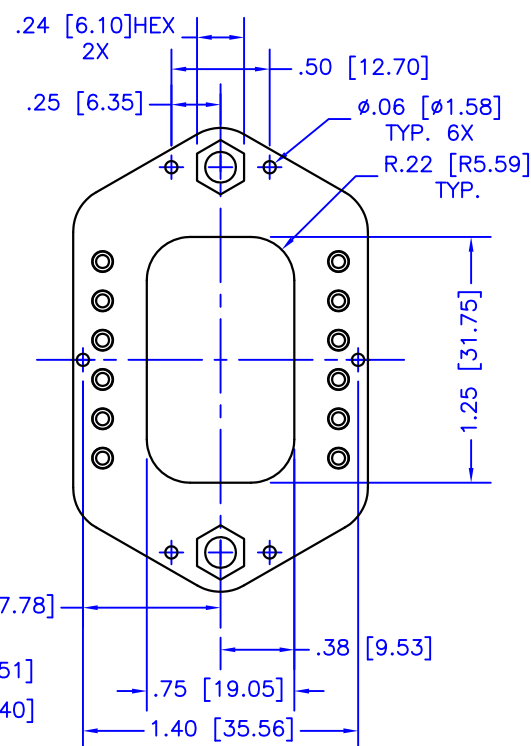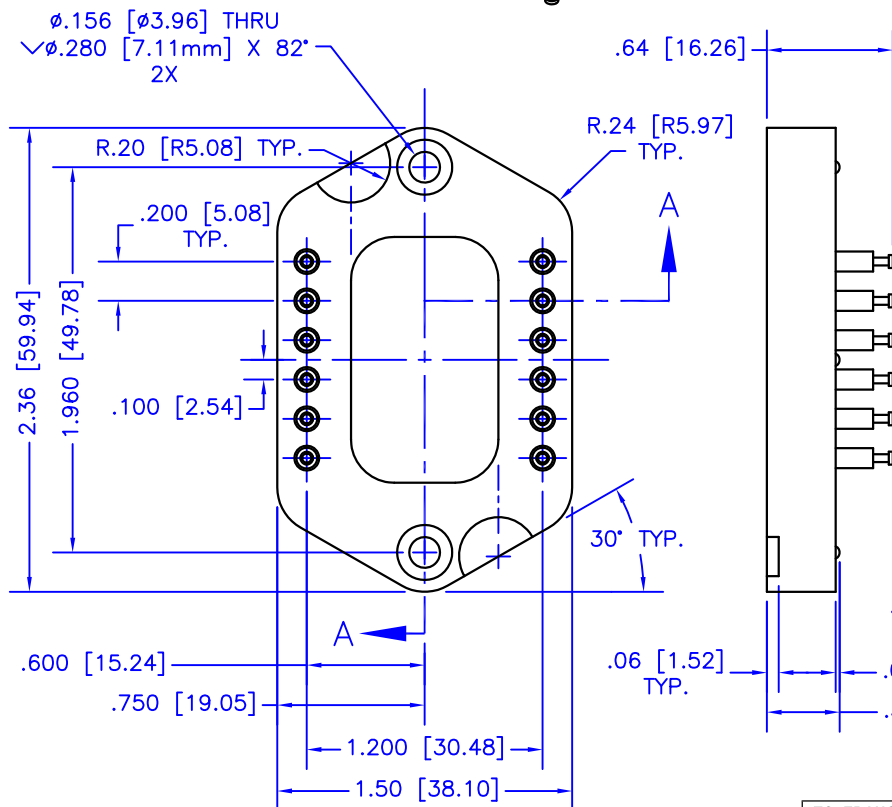

SECTION A-A

TOLERANCES - UNLESS OTHERWISE SPECIFIED

.XX = ±.05 [.002]

.XXX = ±.005 [.0002]

ANG. = ±2°



TITLE:

POWER DIP SOCKET

SUBJECT:

MECHANICAL DRAWING

ENGINEER:

D-M

ENGINEER:

P.ECK

DCAL:

12437

SHL:

1

OF

1

MODEL:

MS05

FILENAME:

MS05

REV:

E

DATE:

14NOV12

4

3

2

1