

4

3

2

1

D

D

C




C

B

B

A

A

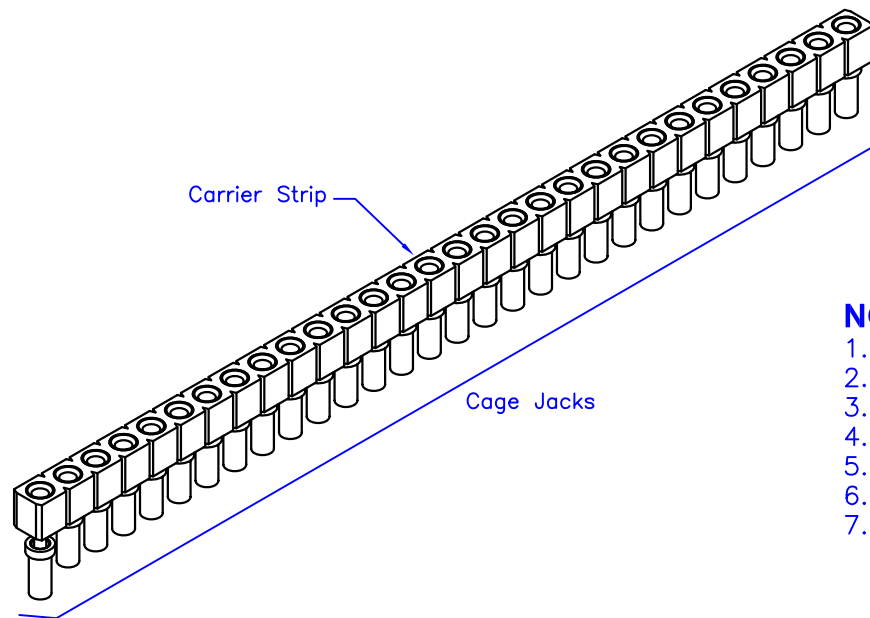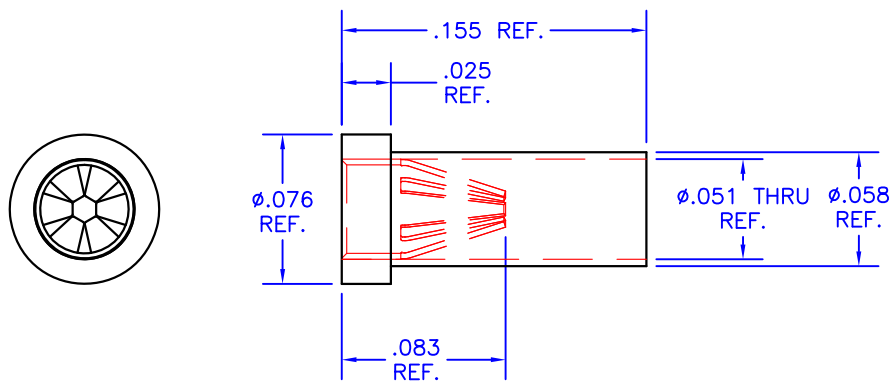

NOTES:

1. Unless otherwise noted, dimensions are in inches.
2. Shell: 360 brass, half-hard, with 200 μ in tin/lead over nickel
3. Contacts: Beryllium copper with 10 μ in gold over nickel
4. Current rating: 4.5 amps, for 10°C temperature rise.
5. Solder mount in minimum .059/.061 diameter mounting hole.
6. Mill-Max Part No. 0305-2-15-01-47-27-10-0
7. This receptacle is supplied on a 30-position carrier strip as Mill-Max part number S703-93-130-47-052100.

TOLERANCES - UNLESS
OTHERWISE SPECIFIED

.XX = $\pm .05$ [.002]
.XXX = $\pm .005$ [.0002]
ANG. = $\pm 2^\circ$



TITLE:

**PIN RECEPTACLE
FOR .025-.037 DIAMETER PINS**

MODEL:

MS11

SUBJECT:

MECHANICAL DRAWING

ENGINEER:

D-M P.ECK

DRAWN BY:

12347

DCA:

1

SPL:

1

OF

MS11

MS11

REV:

D

DATE:

14NOV12

4

3

2

1