





(2,00 mm) .0787"

MTMM SERIES

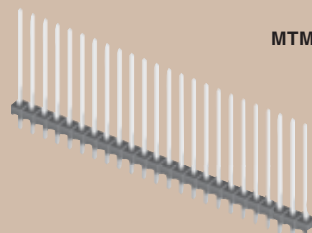

MTMM-114-05-T-Q-225

MTMM-124-14-L-S-600



MTMM-108-07-F-D-200

MODIFIED THROUGH-HOLE HEADER

SPECIFICATIONS

For complete specifications see www.samtec.com?MTMM

Insulator Material:

Black Liquid Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Sn or Au over

50 μ " (1,27 μ m) Ni

Current Rating:

3A per contact

@ 80°C ambient

Operating Temp Range:

-55°C to +105°C with Tin;

-55°C to +125°C with Gold

RoHS Compliant:

Yes


Lead-Free Solderable:

Yes




Mates with:
CLT, SQT, SQW, ESQT,
TLE, SMM, MMS, TCSD

Board Stacking

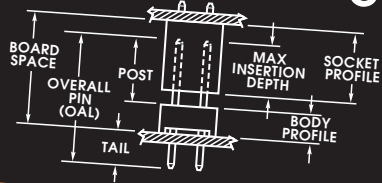

Choice of
single, double or
quad row

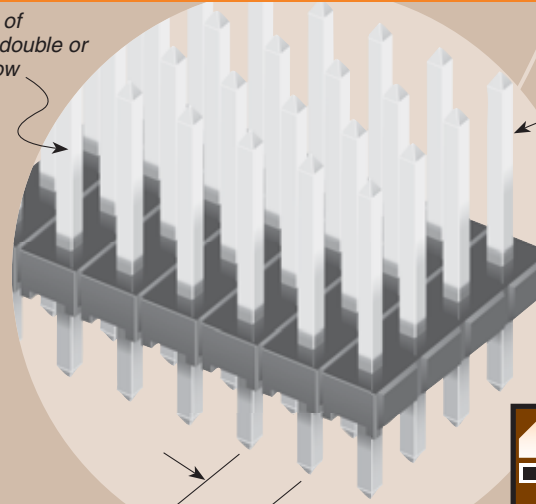

Specify
post height in
(0,13 mm).005"
increments



(2,00 mm)
.0787" pitch

MTMM	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	POST HEIGHT	OPTION
		01 thru 50	Specify LEAD STYLE from chart.	-F = Gold flash on post, Matte Tin on tail -L = 10 μ " (0,25 μ m) Gold post, Matte Tin on tail -T = Matte Tin	-S = Single Row -D = Double Row -Q = Quad Row	"XXX" = Post Height in inches (0,13 mm).005" increments Example: -070 = (1,78 mm) .070"	"XXX" = Polarized Position Specify position of omitted pin

Note: Other Gold plating options available. Contact Samtec.

LEAD STYLE	OAL
-02	(6,48) .255
-03	(7,67) .302
-04	(8,20) .323
-05	(9,58) .377
-06	(10,08) .397
-07	(11,58) .456
-08	(12,09) .476
-09	(13,59) .535
-10	(14,10) .555
-11	(15,09) .594
-12	(15,60) .614
-13	(17,09) .673
-14	(19,08) .751
-15	(21,08) .830

Note: This Series is non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM