



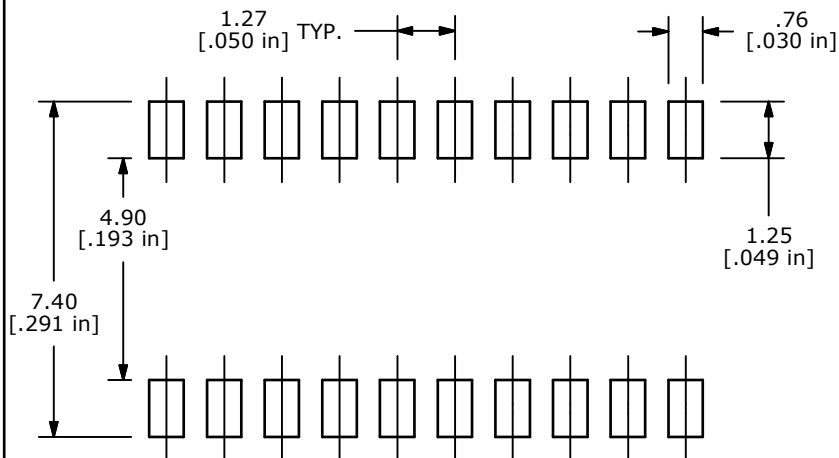


PC LAYOUT

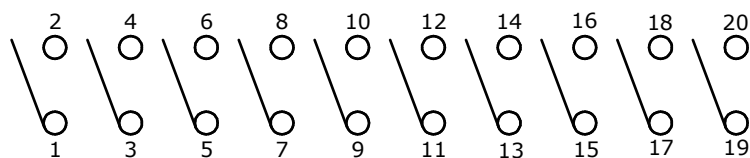


CIRCUIT LAYOUT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲4. OPERATING FORCE: 500±100 gf
5. TRAVEL: 0.6±0.25 mm
6. CONTACT RATING: 25mA, 24VDC
7. CONTACT RESISTANCE: 100mΩ MAX.
8. INSULATION RESISTANCE: 100MΩ MIN @ 500VDC
9. DIELECTRIC STRENGTH: 300VAC 1 MIN.
10. LIFE: 1,000 CYCLES.
11. OPERATING TEMPERATURE: -40°C TO 85°C
- ▲12. PACKAGING: TAPE AND REEL/ 4000 PIECES PER
13. ▲ DENOTES CRITICAL PARAMETER.
14. 2002/95/EC (ROHS) COMPLIANT
- ▲15. SWITCHES TO BE SHIPPED WITH THE ACTUATORS IN THE "OFF" POSITION.



ISOMETRIC

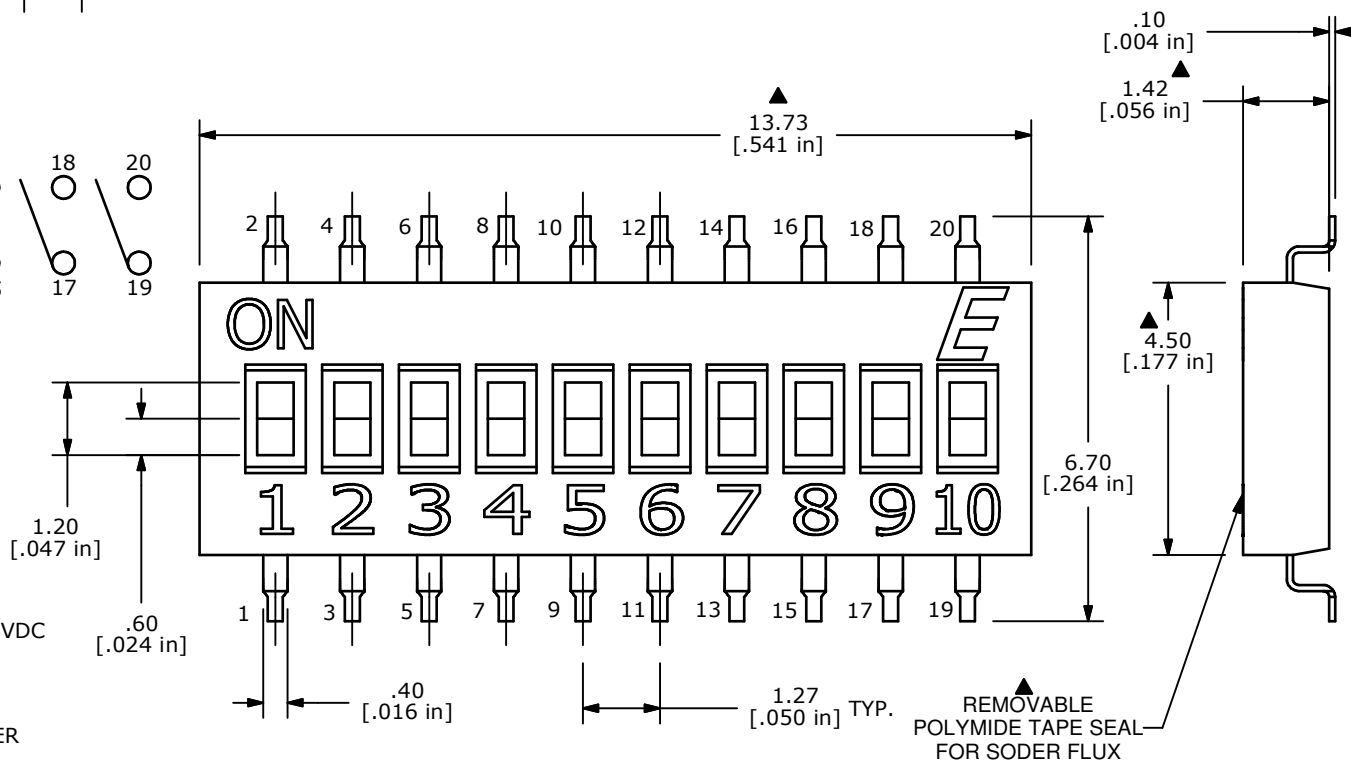

E-SWITCH®



TITLE KAN1110RR

A	19393	RELEASED FOR PRODUCTION	11/1/10	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	8:1	DATE	11/1/2010	DR	BLR	DWG	N111252	REV	A
-------	-----	------	-----------	----	-----	-----	---------	-----	---