
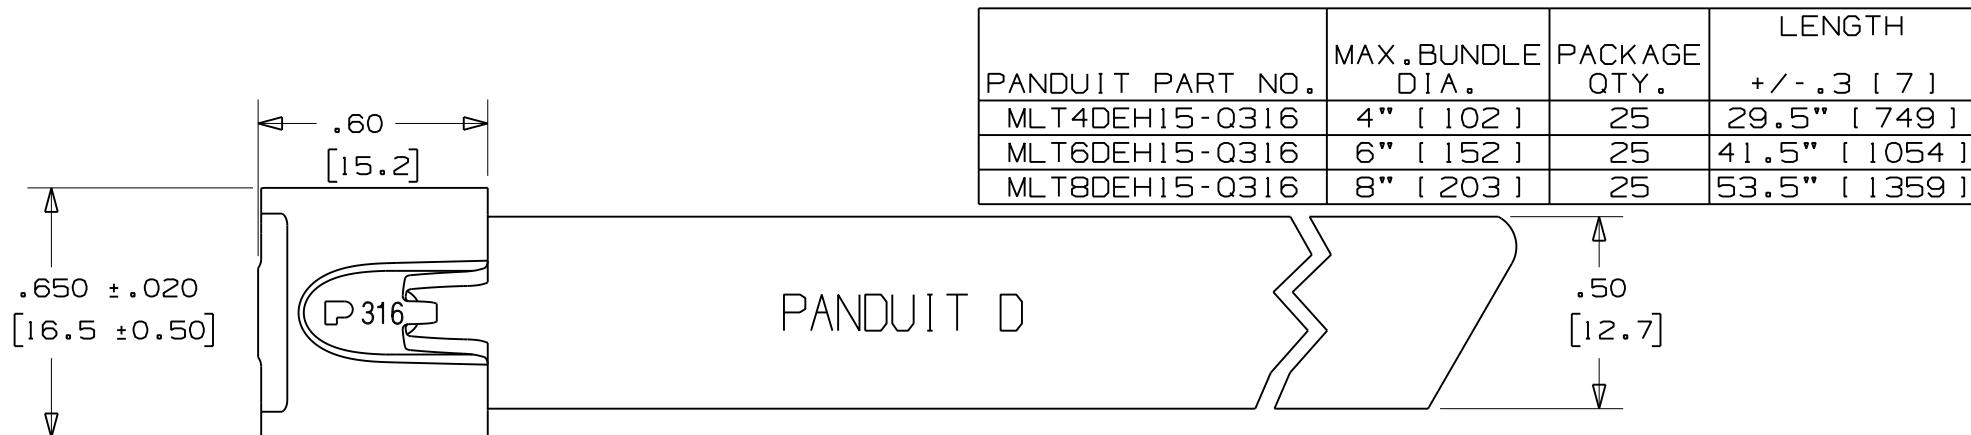
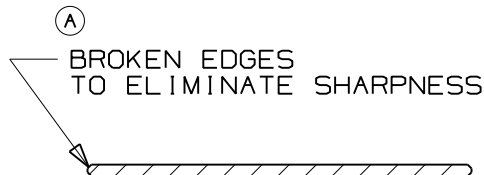


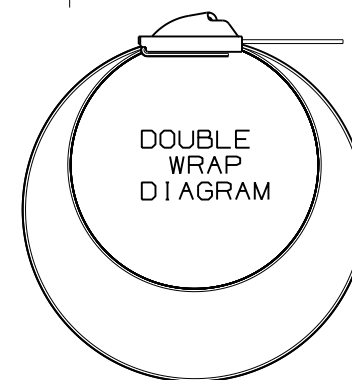

NOTES:

1. APPLICATION TOOLS - ST3MT & RT2HT
2. MINIMUM LOOP TENSILE STRENGTH - 1000 LBS. (4450 NEWTONS) WHEN TESTED ON A 3" MANDREL.
3. BRACKETS [] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:
 .XXX = $\pm .010$ [.25]
 .XX = $\pm .02$ [.5]
 .X = $\pm .03$ [.8]
 ANGLES = $\pm 2^\circ$
5. MATERIAL: 316 STAINLESS STEEL

SECTION A - A
SCALE: 4xBODY WRAPS AROUND TWO TIMES
ENTERING HEAD TWICE
(NOT TO SCALE)

N41162BS_DC01A

								PANDUIT CORP. TINLEY PARK, ILLINOIS				
01A	10/08	JAMB	SKB	ORIG CAD FILE SPEC WAS S41162_01 NOTE 1: APPLICATION TOOL RTIHT REPLACED BY RT2HT								
01	8/04	JAMB	EJD	Ⓐ REMOVED "AISI NO.5"		11907	CCH	JJB	METAL LOCKING TIE EXTRA HEAVY DUTY 316 STAINLESS STEEL DOUBLE WRAP			
00	1/04	JAMB	DPN	RELEASED		11307	CCH	JJB				
REV	DATE	BY	CHK	DESCRIPTION		ECN #	PM	CUST	DRAWN BY JAMB	CHK'D DPN	SCALE 2x	DRAWING NO. N41162BS_DC