


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

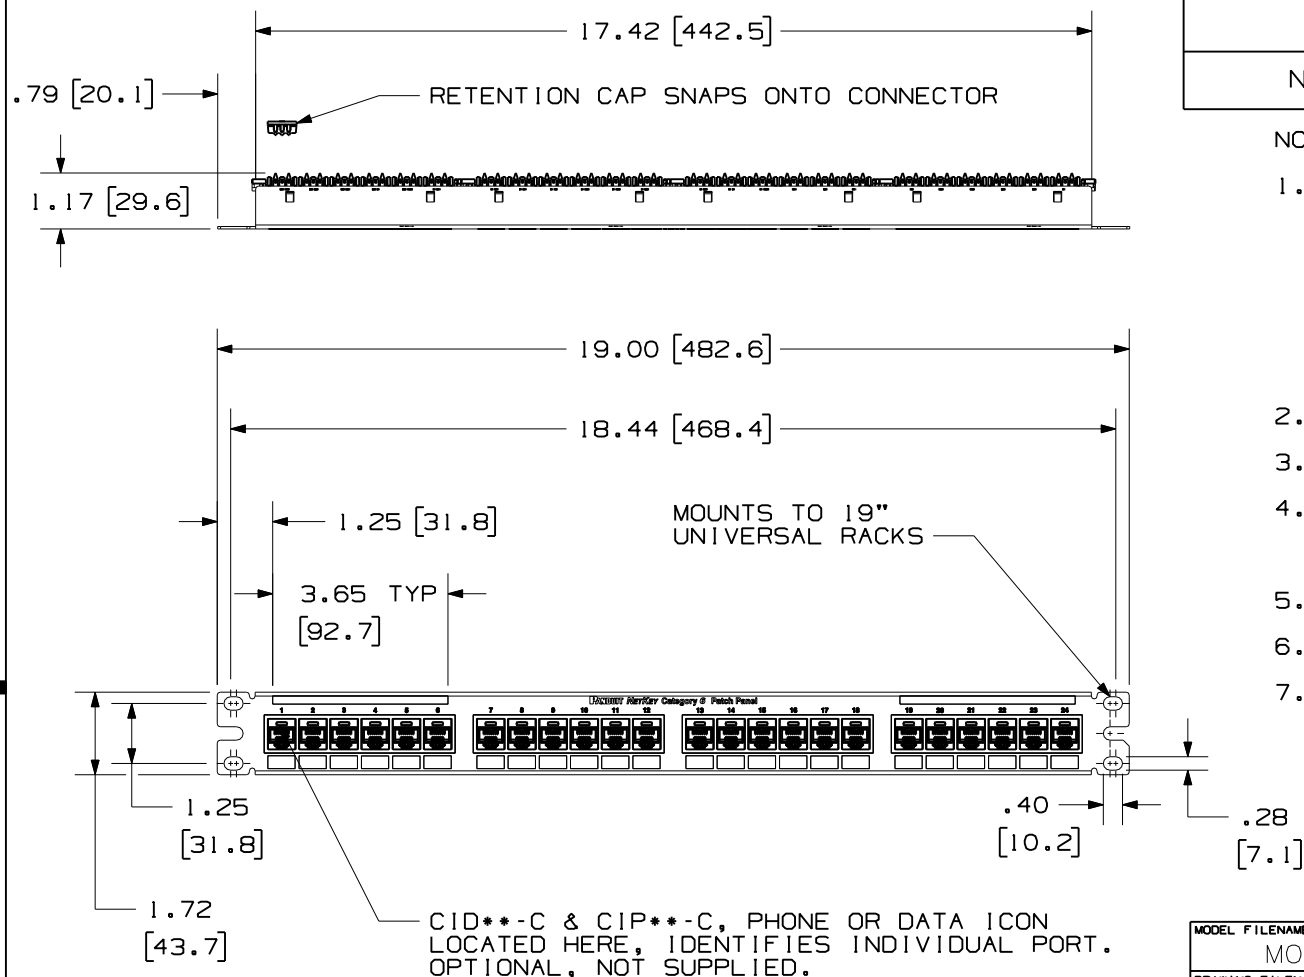

PANDUIT
PART NO.



WEIGHT
(APPROX.)

NK6PPG24Y

1.25 lb (567 g)

NOTES:

1. MATERIAL:
PANEL HOUSING: STEEL
RJ45 MODULE: THERMOPLASTIC RESIN UL94V-0
PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
2. 24 PORT PATCH PANEL 8 POSITION 8 WIRE.
3. THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
4. FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) METRIC M6x1x15MM SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
5. DIMENSIONS IN PARENTHESES ARE IN METRIC.
6. USE 110 STYLE TERMINATION TOOL FOR PUNCH DOWN.
7. RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

MODEL FILENAME	MO2088AA_1RU_24PORT_PANEL_ASSY_06	SIZE	A
DRAWING FILENAME	MO2479JL_DC248_00A		
TITLE	NETKEY CAT6 24 PORT PATCH PANEL CUSTOMER DRAWING		
	PANDUIT ™ CORP. TINLEY PARK, IL 60477	I.I. NUMBER	
		PRODUCT SPEC	
	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ± .03 (.XXX) ± .005 (.XX) ± .01 ANGLES ± 1°	WORK INSTRUCTION	
		SCALE .25:1	
DRAWN BY LZ	REVIEW DRAWING NUMBERS	PART NO. SEE CHART	
DATE 3-4-06		DRAWING NO. 02479-248	
CHK'D			

R	3-4-06	LZ		RELEASED TO PRODUCTION	02479-248				
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH