


SMD Power Inductors (NR series)

NR5040T4R7N

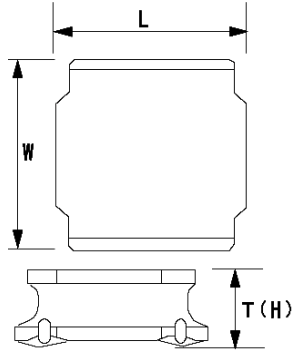

■ Features

- Item Summary
4.7 μ H(\pm 30%), 3300mA, 3100mA
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping 1500pcs

■ Products characteristics table


CaseSize (EIA/JIS)	-/5040
Inductance	4.7 μ H(\pm 30%)
Inductance Measuring Frequency	100kHz
Rated Current -Saturation Current	3300mA
Rated Current -Temperature Rise Current	3100mA
DC Resistance (max)	0.0377 Ω
Avg. of DC.Resistance	0.029 Ω
Temperature Range	-25 $^{\circ}$ C to 120 $^{\circ}$ C
Self-resonant Frequency (min)	28MHz
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

■ External Dimensions

L	4.9mm \pm 0.2
W	4.9mm \pm 0.2
H	4.1mm max

■ Recommended Land Patterns

【推奨ランドパターン】 実装上の注意 ・実装状態を確認の上で使用ください。また、ご購入の際は、本製品のほんだ付けはフラットハンダ工法で行います。
【Recommended Land Patterns】 Surface Mounting ・Mounting and soldering conditions should be checked beforehand ・Applicable soldering process to these products is reflow soldering only.



SMD Power Inductors (NR series/NR series H type/S type /V type)			
Type	A	B	C
NR5010			
NR5012			
NR5014			
NR5020	1.5	3.6	4
NR5024			
NR5030			
NR 5040, NR5040			

unit:mm

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.

2013.11.25