






MICRO SWITCH

A DIVISION OF MINNEAPOLIS HONEYWELL REGULATOR COMPANY
FED. MFR. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
OP-Q

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

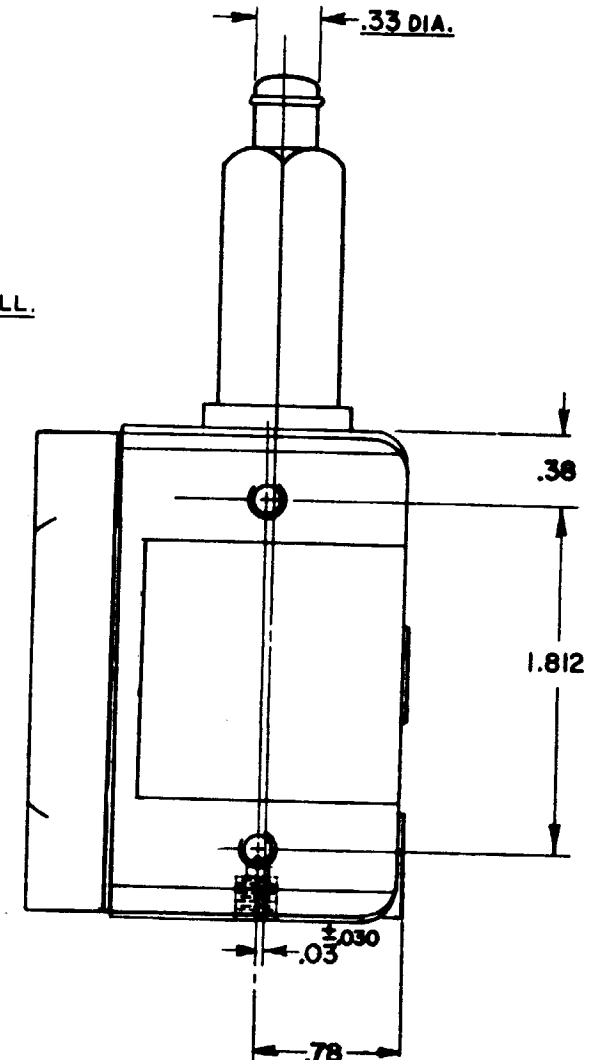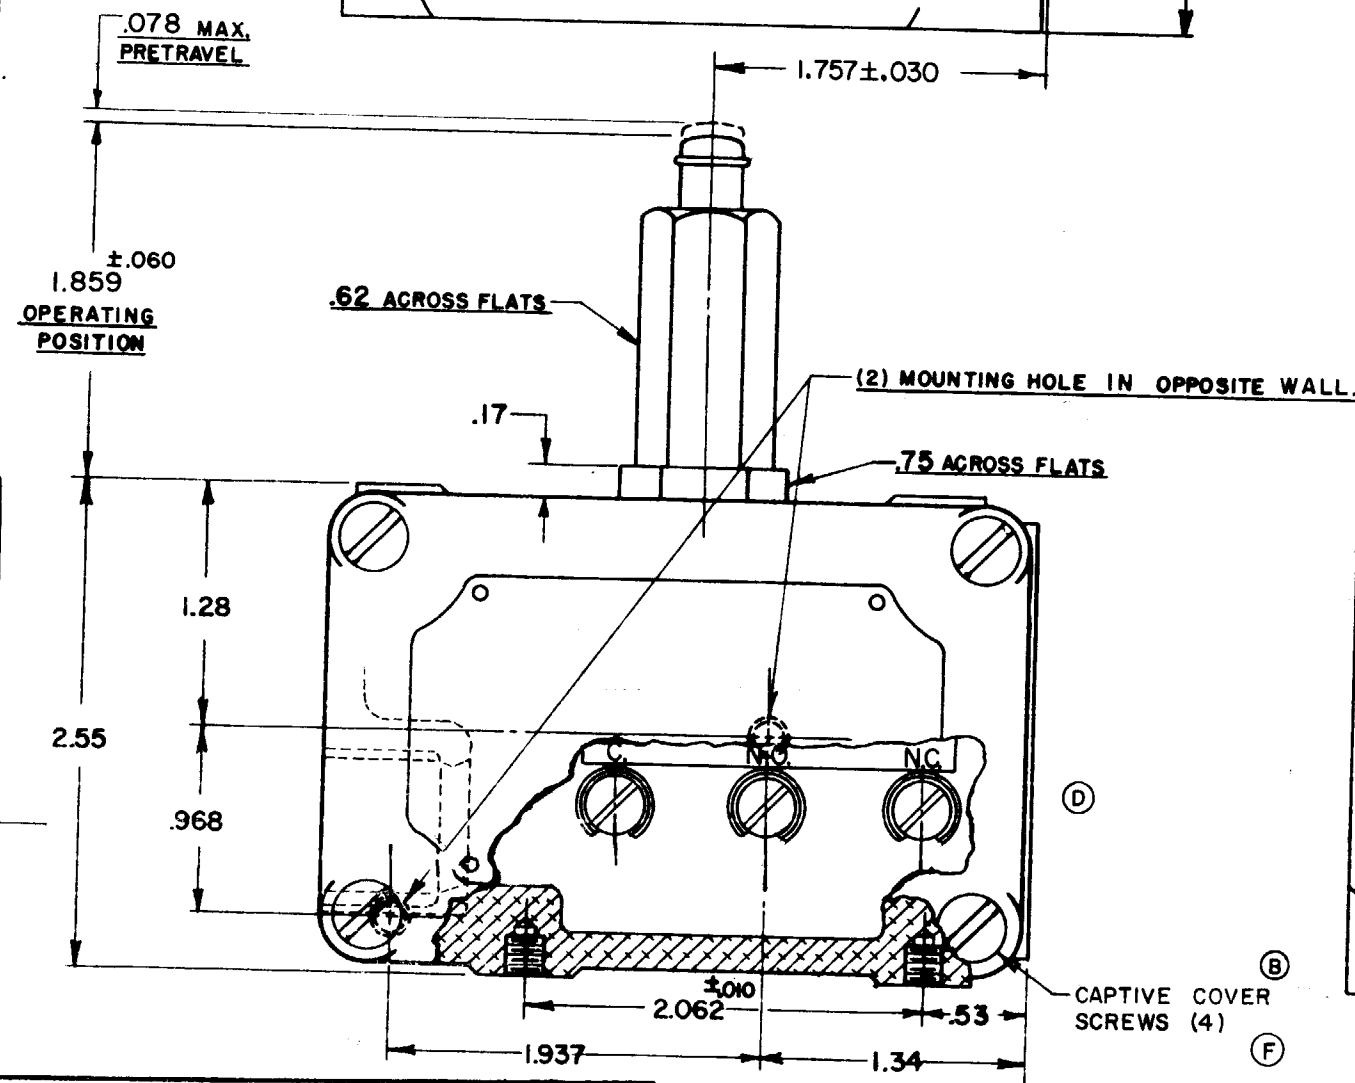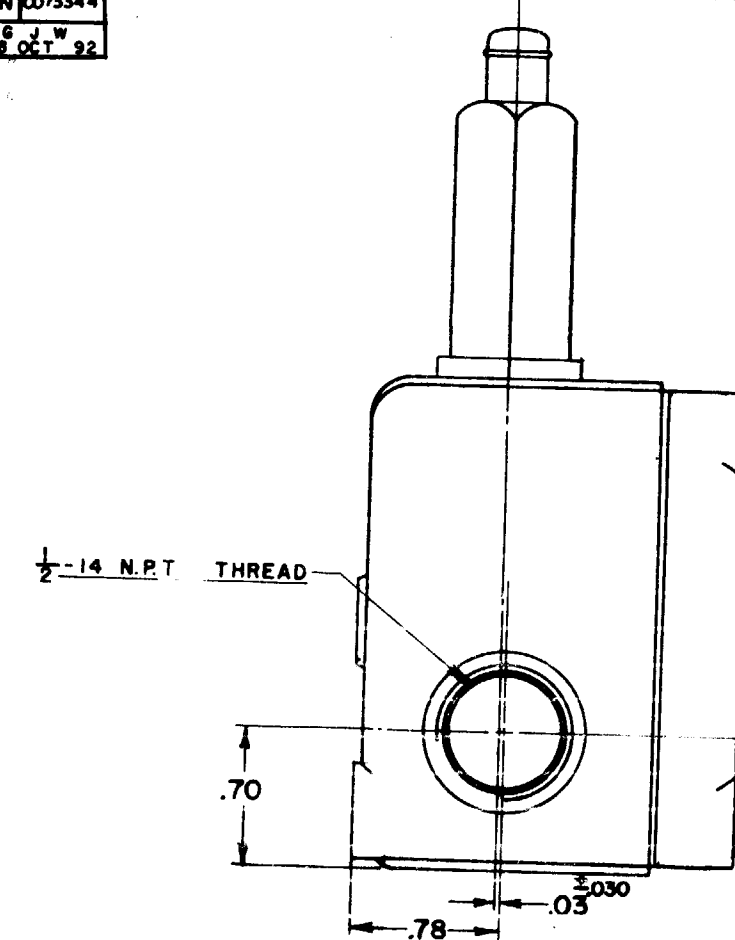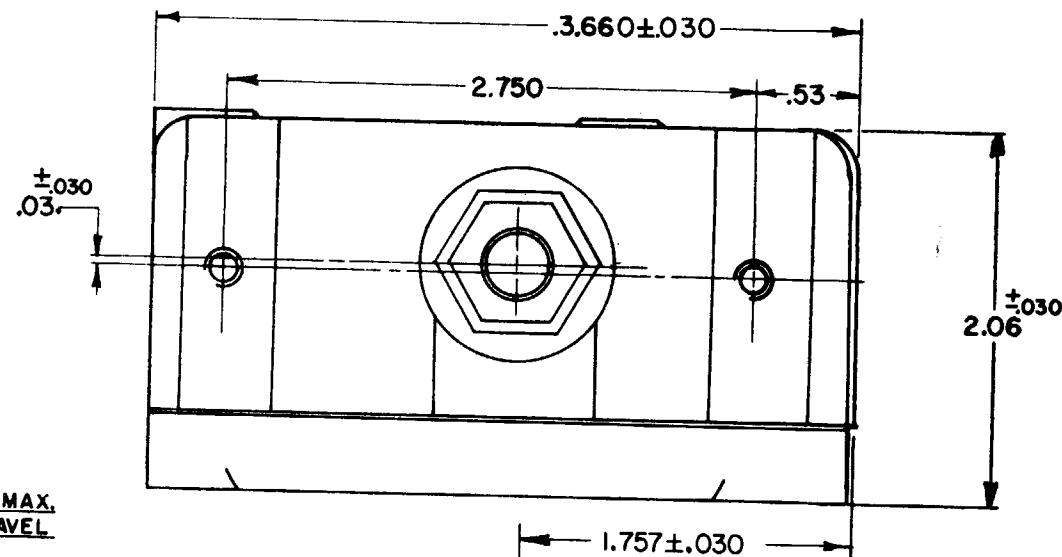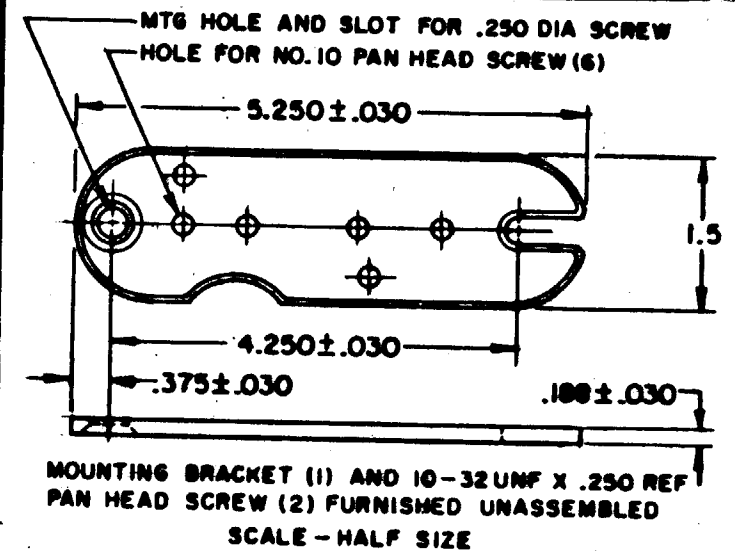

NOTE -

1-(8) MOUNTING SCREW HOLE, 10-32 NF-28 THREAD X .219 DEEP.

2-8-32 NC X .219^{REF} BINDER HEAD TERMINAL SCREWS AND CUPWASHERS.
3-PLUNGER ASSEMBLY IS UNSEALED

CHARACTERISTICS

OPERATING FORCE ----- 3 LBS. MAX.
RELEASE FORCE ----- 3/4 LB. MIN.
DIFFERENTIAL TRAVEL ----- .004 MAX.
OVERTRAVEL ----- .188 MIN.

BASIC SWITCH REPLACEMENT BZ-2R-P4

ELECTRICAL DATA

CONTACT ARRANGEMENT
S. P. D. T.

-L96- 15 A-125, 250, OR 480 VAC
1/2 A-125 VDC; 1/4 A-250 VDC
1/8 HP-125 VAC; 1/4 HP-250 VAC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .018
THREE PLACE (.000) ± .008
ANGLES ±

WEIGHT

OP-Q
M
DRAWING NUMBER
MS24
ISSUE
13
12
11
10
9
8
7
6
5
4
3
2
1
REVISIONS
A C.O. 9182
C.M.A.
31 AUG. 55
B CO 13827
NHL
17 JULY 59
C CO 15608
M.B.F.
10 FEB 61
D CO 17653
CO 16851
M.B.F.
11 DEC 62
E CO 18276
H.B.W.
19 JUN 64
F CO 19878
W.E.G.
15 APR 67
G CO 26103
D.L.F.
21 JUL 69
H CO 28628
R.E.R.
24 FEB 71
J CO 53779 A
S.L.B.
30 AUG 83
K CO 55987
J.A.S.
5 NOV 84
L CO 56738
K.J.S.
28 JAN 85
M CO 55031
T.S.K.
23 DEC 85
C.M.A.
31 AUG 85
74-863