

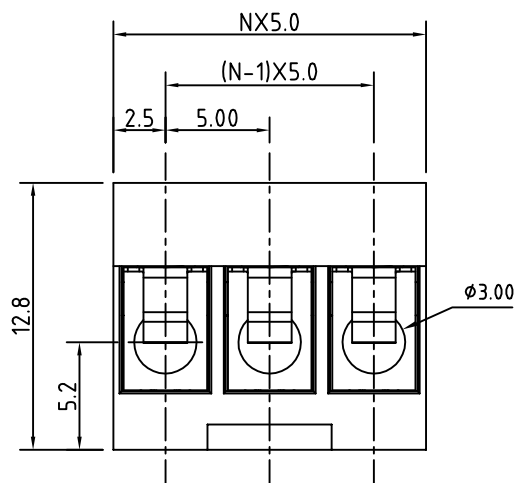




N=Number of contacts

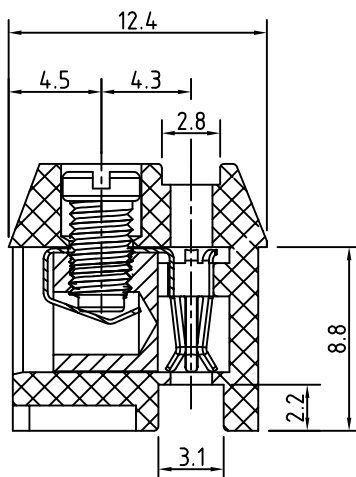

SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Terminal body
- (metal housing): Brass(CuZn) - Ni plating 160u"~240u"
- Terminal screw: Steel Zinc plating "-" slot type
- Wire guard: PhBz (CuSn) - Tin plating 100u"~200u"
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300V
- Current rating: 10A
- Wire range:
 - Solid wire(AWG): 14-26
 - Stranded wire(AWG): 14-26
- Torque: 3.5Lb-In
- Screw: M3.0
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature:-30°C to+105°C
- Safety Approval: File #E244937
- RoHS Compliant

PART NUMBER:

OSTTXXX0100

No. of Poles
02: 2 Poles
:
24: 24 Poles

COLOR
0: Black (Standard)
5: Green
6: Blue
8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTTX-5.0mm Series				
PART NO.	OSTTXXX0100	DWG NO.		OSTTXXX0100.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
Shi Jun 2006.10.23	Shi Jun 2006.10.23	xionghaitao 2006.01.25	xionghaitao 2006.01.25		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					REV: D	X.XX ±0.10
				SHEET: 01/01		X° ±1°