

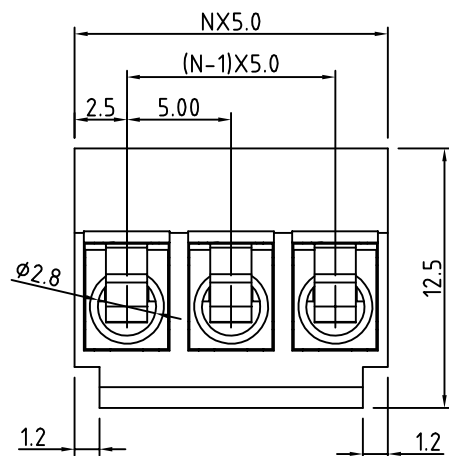


SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			



N=Number of poles

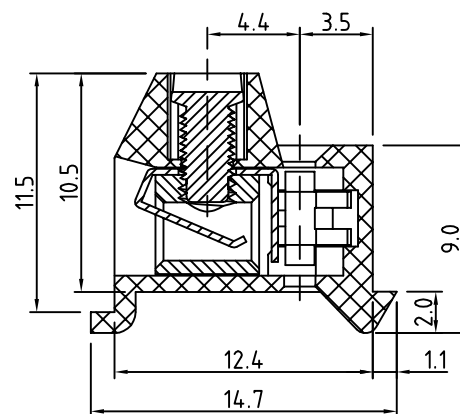

Material

- Terminal body
- (metal housing): Brass (Cu Zn)
- Terminal screw: Steel Zinc plating "-" slot type
- Wire guard: PhBz,tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
 - Solid wire(AWG): 14-26
 - Stranded wire(AWG): 14-26
- Torque(Lb-In): 3.5
- Screw: M2.6
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Safety Approval: 

RoHS Compliant

PART NUMBER:

OSTTYXX0100

No. of Poles

02: 2 Poles

:

24: 24 Poles

COLOR

0: Black (Black)

5: Green

6: Blue

8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTTY-5.0mm Series				
PART NO.	OSTTYXX0100			DWG NO.	OSTTYXX0100.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
Shi Jun 2006.10.23	Shi Jun 2006.10.23	xionghaitao 2006.01.25	xionghaitao 2006.01.25		UNIT: mm SCALE: NONE	X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
SHEET: 01/01					REV: C	