

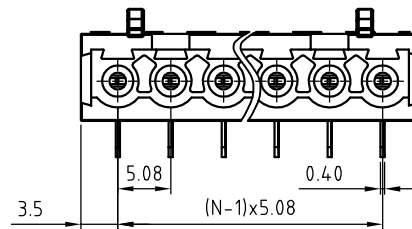
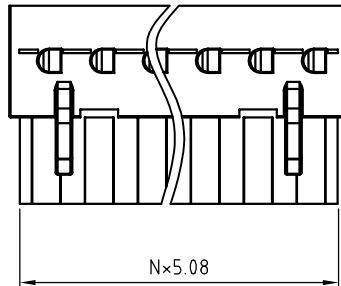


SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

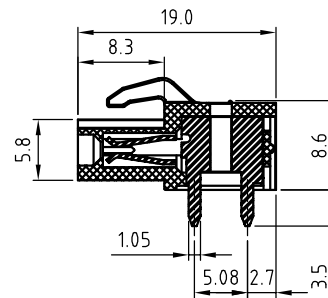

N=Number of poles

### P.C.B LAYOUT

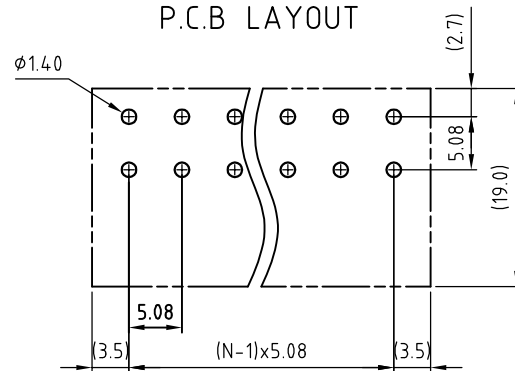

### Material

- Wire guard: PhBz(CuSn)
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

### Electrical

- Voltage rating: 300VAC
- Current rating: 20A
- Withstanding Voltage: 1.6kv
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: US

RoHS Compliant

PART NUMBER:

**OSTV7XX5151**

No. of Poles

02 2 Pole  
03 3 Pole  
...  
24 24 Pole

COLOR

0: Black  
5: Green (Standard)  
6: Blue  
8: Light Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTV7 5.08mm Series 90° Right angle 2P-24P			
PART NO.	OSTV7XX5151	DWG NO.	OSTV7XX5151.DWG		
APPROVED	Shi Jun 2006.11.11	CHECKED	Shi Jun 2006.11.11	DESIGNED	Tason 04/19`06
		DRAWN	Tason 04/19`06	CUST NO.	
				UNIT: mm	X. ±0.5
				SCALE: NONE	X.X ±0.3
				REV: B	X.XX ±0.1
				SHEET: 01/01	X° ±1°