


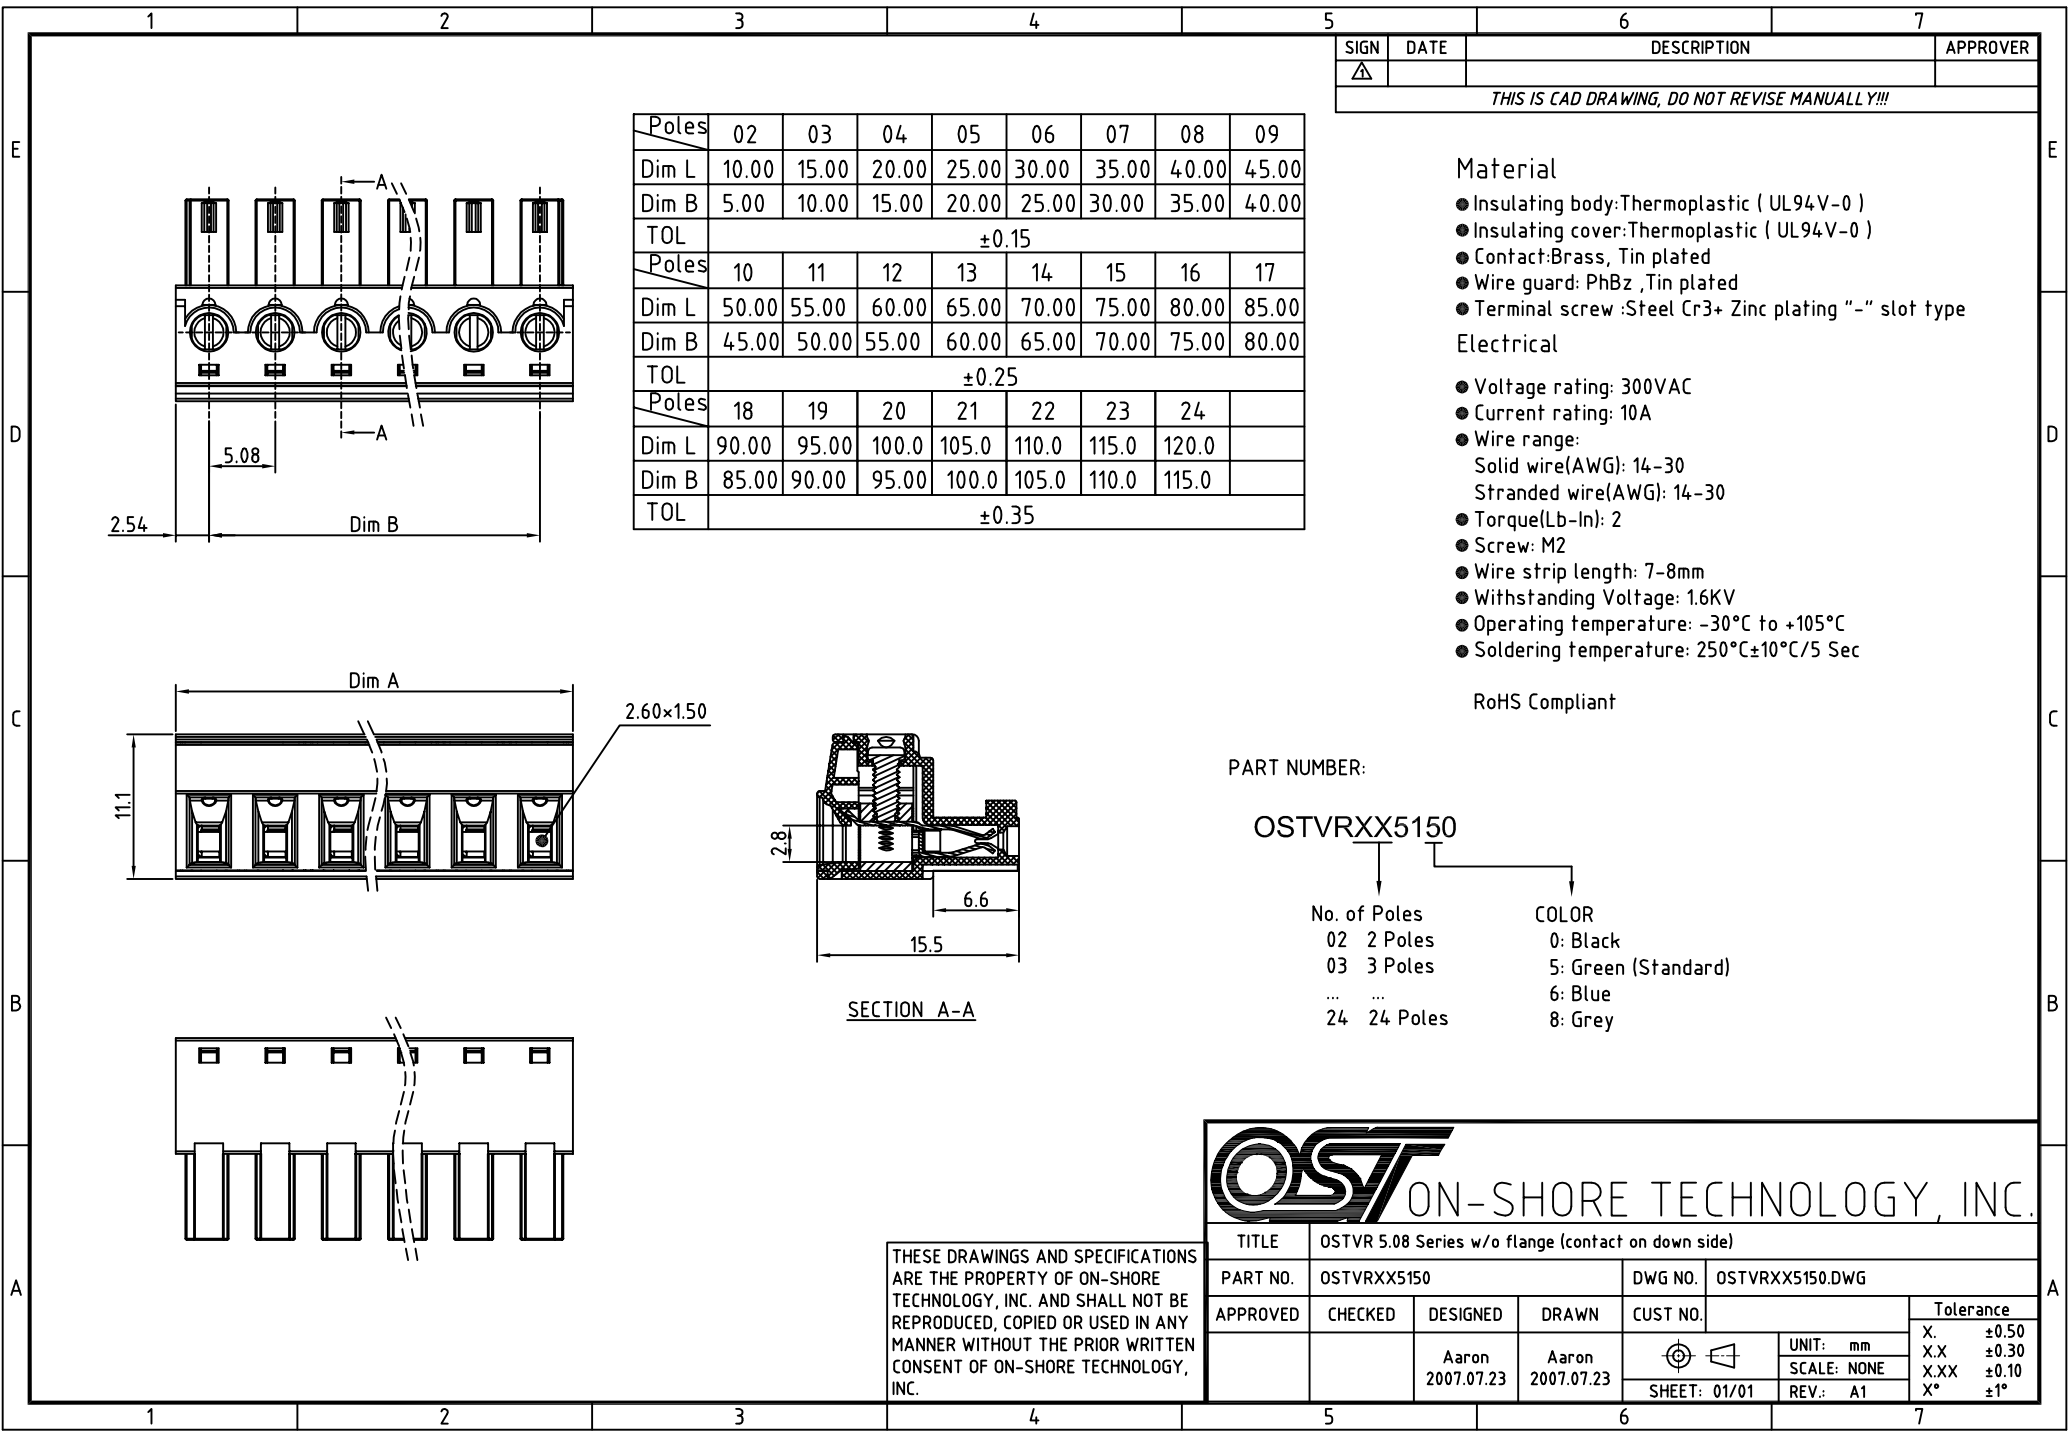

SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

- Material
- Insulating body: Thermoplastic (UL94V-0)
 - Insulating cover: Thermoplastic (UL94V-0)
 - Contact: Brass, Tin plated
 - Wire guard: PhBz ,Tin plated
 - Terminal screw :Steel Cr3+ Zinc plating "-" slot type
- Electrical
- Voltage rating: 300VAC
 - Current rating: 10A
 - Wire range:
Solid wire(AWG): 14-30
Stranded wire(AWG): 14-30
 - Torque(Lb-In): 2
 - Screw: M2
 - Wire strip length: 7-8mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -30°C to +105°C
 - Soldering temperature: 250°C±10°C/5 Sec

RoHS Compliant

PART NUMBER:

OSTVRXX5150

- No. of Poles

02 2 Poles

03 3 Poles

... ..

24 24 Poles
- COLOR

0: Black

5: Green (Standard)

6: Blue

8: Grey

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

OST ON-SHORE TECHNOLOGY, INC.							
TITLE		OSTVR 5.08 Series w/o flange (contact on down side)					
PART NO.	OSTVRXX5150			DWG NO.	OSTVRXX5150.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Aaron 2007.07.23	Aaron 2007.07.23		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
					SHEET: 01/01	X.XX	±0.10
					REV: A1	X°	±1°